

Crompton Lamps/Phoebe LED **V2**
Lighting Solutions

Working With Crompton Lamps

Founded in 1878, Crompton Lamps has always been at the forefront of lighting innovation, from installing some of the earliest recorded electrical lights to manufacturing and distributing today's modern lighting solutions.



Experienced Team

Our management team has amassed 50+ years of working within the lighting and electrical industries. This valuable experience plays a vital role in providing the right business direction, product selection and leadership.



Next Day Delivery Service

We offer a competitive and comprehensive Next Day delivery service for orders placed Monday - Friday before 4pm. We are committed to providing a fast and reliable delivery service that customers can depend on.



Dedicated After Sales and Customer Service

Customer service has always been our priority. We want to ensure customers have the best possible experience when working with us. A key part of our service is providing strong after-sales care through our sales and customer service teams.



Broad Range of Lamps, Fittings and Technologies

We offer a complete lighting solution for a variety of applications. We understand that LED technology is the present and future of lighting but we still know the value and marketplace importance of traditional lighting technologies.



Large Stock Holding

Our UK warehouse has stock-holding of circa. £3 million. This ensures we have the products customers need ready to be picked, packed and despatched, day after day, week after week.



Online Portal and Ordering

Our online store and website allows customers to quickly login and receive services that include online ordering, view order history, real-time stock availability and prices, marketing material and detailed product information.



In-house Quality Control and Testing

We have built a strong reputation for quality and remain dedicated to providing customers with the highest standard products. We test all products in our on-site lab and testing facilities, giving us full confidence in our marketplace products.

Projects


Our proud and successful history ensures a wealth of knowledge and experience. Our lamps and fitting ranges are the ideal choice for a wide range of commercial lighting projects and can be found installed up and down the country. If you have a project you believe we can assist you with, then please contact us.



Aston Villa Football Club



Leeds Minster

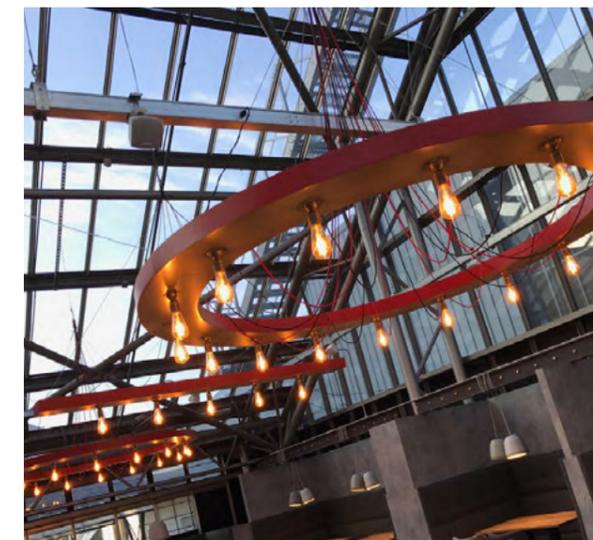

Scottish Exhibition Center



Thruxton Motorsport Centre

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



LED Fittings

LED Downlights




Orphica LED Commercial Downlight	10
Firesafe LED Downlight	14
Firesafe LED Smart Downlight	18
Spectrum LED RGB Downlight	22
Atlanta Universal Fit LED Downlight	26

LED Battens



Photius LED IP42 Integrated Batten	30
Oracle LED IP20 Integrated Batten	34
Lykos LED IP65 Integrated Batten	38

LED Panels

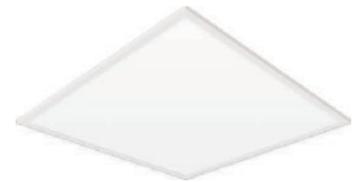

Galanos Arteson LED Backlit Panels	42
------------------------------------	----

LED Bulkheads



Melana LED Round Bulkhead	46
Savoca LED Internal Ceiling Light	50

LED High Bay



Keto LED High Bay	54
-------------------	----

LED Floodlights



Atlas LED Commercial Floodlight	58
Atlas Mini LED Slim-line Floodlight	62

LED Flexi-Strip Kits



LED Flexi-Strip 5 Meter Kit	66
-----------------------------	----

LED Emergency Range



Krios Emergency LED Blade	70
Krios Emergency LED Wall Box	74
Krios Emergency LED Bulkhead	78
Krios Emergency LED Spotlight	82
Krios Emergency LED Twin Spotlight	86

Lighting Controls



Intelligent Dimmer Switch	90
Smart Relay Switch	94

LED Lamps

LED Smart Lamps



LED Smart GLS	102
LED Smart Candle	103
LED Smart GU10	104
LED Smart Flexi-Strip Kit	105

LED Filament Lamps



LED Clear Dimmable GLS Filament	106
LED Clear Candle/Round Filament	107
LED Clear Dimmable Bent-tip Candle Filament	108
LED Pearl Dimmable GLS Filament	109
LED Pearl Candle/Round Filament	110
LED Silver Crown GLS Filament	111
LED Antique ST64 & Globe Straight Filament	112
LED Antique Spiral Filament	113

LED Thermal Plastic Lamps



LED Thermal Plastic Non-dimmable GLS	114
LED Thermal Plastic Dimmable GLS	115
LED Thermal Plastic Non-dimmable Candle	116
LED Thermal Plastic Dimmable Candle	117
LED Thermal Plastic Non-dimmable Round	118
LED Thermal Plastic Dimmable Round	119
LED Thermal Plastic Reflectors	120
LED Thermal Plastic 110V GLS Special Purpose	121

LED GU10 Lamps



LED Thermal Plastic SMD GU10	123
LED Glass SMD GU10	124
LED 5W COB GU10	125
LED Glass SMD Sunset Dim GU10	126
LED SMD Long Barrel GU10	127

LED MR11/MR16 Lamps



LED MR16	128
LED MR11	129

LED Tubes



LED T8 Tubes	130
LED T8 Foodsafe Tubes	131
LED T5 Tubes	132
LED T5 Direct to Mains Tubes	133

LED Retrofit Lamps



LED PLL Direct to Mains	134
LED Double Ended Tubular	135
LED Dimmable AR111 with Driver	136
LED R7s Linear	137
LED GX53	138

LED Capsule Lamps



LED G4 Capsule	139
LED G9 Capsule	139

LED Appliance Lamps



LED Filament Cooker Hood	140
LED Fridge/Pygmy/Sign	140

LED PAR Lamps



LED PAR30	141
LED PAR38	141

LED Colour Lamps



LED Colour Filament Harlequin GLS	142
LED Colour Filament Harlequin Round	143

POS & Promotional

Modular POS Display



Modular POS

144

148

LED Smart Light Display

LED Smart Range Display



Downlight POS Display



Foamex Downlight Display

146

148

LED Light Bar Display

LED Light Bar Display



4-Tier Display Unit



4-Tier Cardboard Display Unit

147

149

Promotional Items

Promotional Items






TECHNICAL INFORMATION

- Energy efficient LED recessed downlight with separate quick connect replaceable driver
- Reflective inner cone for maximum light output
- Low glare
- IP44 rated suitable for use in bathrooms
- 4000K cool white colour
- Long life 50,000 hours maintenance free operation
- 100,000 switching cycles
- Constructed from corrosion resistant materials
- Instant full light
- Non-dimmable - (dimmable driver upgrade available)
- 5 year warranty

ORPHICA

Recessed Commercial LED Downlight
Featuring Replaceable Driver

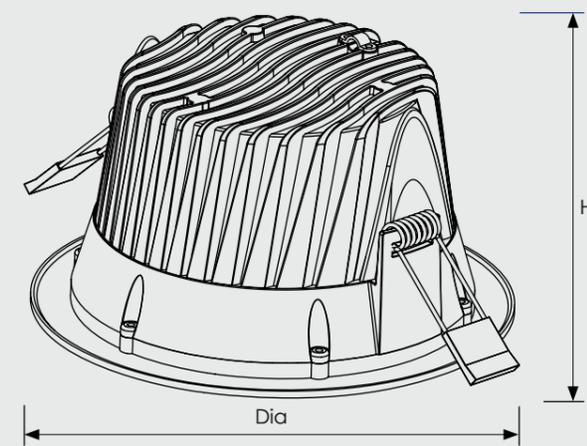

ORPHICA COMMERCIAL LED DOWNLIGHT

Recessed LED Downlight with Replaceable Driver



Quickly Change The Replaceable Driver

All Orphica's in the range have a replaceable driver with quick connection for fast and hassle-free installation.



Quick connect for easy install

Replaceable driver

Replaceable Driver

The replaceable driver can be changed for one that better suits your lighting needs.

Quick Connect

The Orphica has been developed with easy installation in mind and features a quick connector for easily changing drivers.

Reflective Cone

All Orphica's in the range feature a reflective cone designed to maximise light output from the recessed LED light source.

IP44 Rated

The IP44 rating makes the Orphica range perfectly suited for a variety of indoor commercial environments and conditions.

Low Glare

The Orphica range emit low glare, providing more comfortable lighting conditions for employees, customers or visitors.

 CLASS 2	Cool White 4000K
65° Beam Angle 8W & 14W	75° Beam Angle 24W & 34W
IP44 RATED	RA ≥80 CRI RATING

5 YEAR Manufacturers Warranty

1 YEAR On-Site Warranty

Not suitable for dimming.



Applications

With its IP44 rating, reflective cone and recessed design, the Orphica is ideally suited for a wide variety of commercial applications such as hotels, stores, offices and replacing both single and twin PL downlights.

Reflective Cone

The reflective cone ensures that the recessed LED light source emits maximum light output without loss of quality.



IP44 Rated

Featuring a rating of IP44, the Orphica range is suitable for use in bathroom zones 2 and 3.



34W

24W

8W 14W

DALI and Emergency Driver options also available. Please ask the sales team for more information.

Product Code	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)			Order Qty
									Dia	H	Cutout ø	
Single Carton												
14985	8	240	Cool White	4000	720	780	90lm/W	65°	102	74	90	1
14992	14	240	Cool White	4000	1330	1480	95lm/W	65°	140	74	120	1
15005	24	240	Cool White	4000	2360	2680	98lm/W	75°	180	96	150	1
15012	34	240	Cool White	4000	3560	3960	105lm/W	75°	230	129	200	1

Tel: 01274 657 088

Email: sales@cromptonlamps.com

Web: www.cromptonlamps.com






TECHNICAL INFORMATION

- 50,000 hours long life maintenance free operation
- 30, 60 & 90 minute fire rated - Fully compliant and certified to BS476 Parts 21 and 22
- Tri-colour selection-switch under front bezel to quickly and easily set to either 3000K warm white, 4000K cool white or 6500K daylight colour temperature
- Dimmable - Compatible with most LED dimmers
- Features insulation guards for added ventilation and safety to prevent the Firesafe from being covered by insulation material
- Supplied with separate tool-less loop-in/loop-out constant current driver for quick and easy installation
- Includes 2x quick change bezels in White and Satin Nickel, polished chrome bezel available separately
- IP65 rated
- Constructed from die-cast aluminium
- Instant full light

FIRESAFE

Firesafe All-In-One LED Downlight
IP65 and Fire-Rated

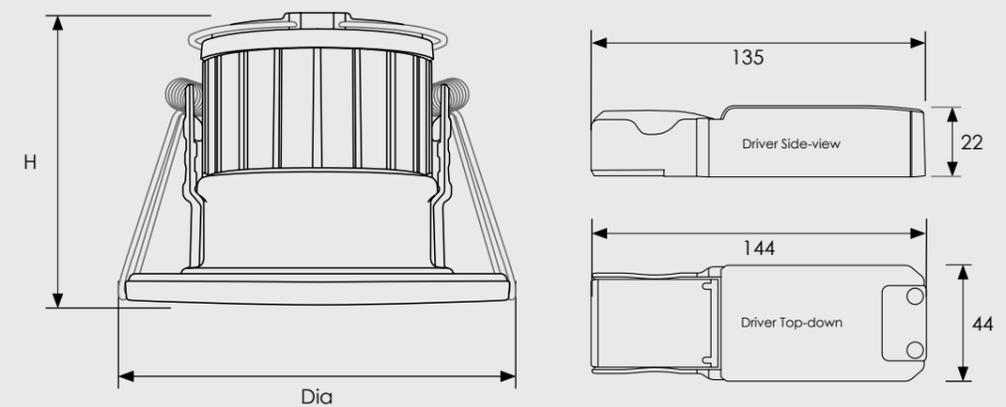

FIRESAFE IP65 FIRE-RATED DOWNLIGHT

All-In-One Dimmable Downlight



Fire Rated

30, 60 & 90 minute fire rated. Fully compliant to BS476 Parts 21 and 22.

IP65 Rated

Suitable for use in bathrooms zone 1-2 and outdoor wet weather use. Complete protection against contact dust.

Dimmable

Featuring a smooth dimmable operation. Designed to ensure compatibility with most LED dimmers.

Easy Install

The quick install loop-in/loop-out constant current driver can be installed during the first phase of a new build or re-wiring project.

Insulation Guards

The adjustable guards prevent the Firesafe from being covered by insulation, improving ventilation and increasing safety.

 CLASS 2	 DIMMABLE
 30, 60 & 90	 TRI-COLOUR
 IP65 RATED	 RA ≥80 CRI RATING

Loop-In/Loop-Out

The separate tool-less, quick install loop-in/loop-out constant current driver can be installed during the first phase of a new build or re-wiring project.



Easy Access Colour Select Switch

The easy access switch is located behind the quick-change magnetic bezel.



Applications

Being both fire and IP65 rated, the Firesafe is the perfect solution for both commercial and domestic applications where safety is a priority such as homes, hotels, apartments and various hospitality premises.



Interchangeable Bezels

Each Firesafe is supplied with white and brushed nickel effect twist-on interchangeable stylish bezels. (Chrome available separately).



Insulation Guards

The adjustable guards prevent the Firesafe from being covered by insulation, improving ventilation and increasing safety.

Product Code	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)			Order Qty
									Dia	H	Cutout ø	
Single Carton												
12639	8.5	240	Warm/Cool/Daylight	3000/4000/6500	650	700	76lm/W	60°	89	65	70-72	1
12646-10	Optional Chrome Bezel - 10 Pack											1

Installation may require advice from a qualified person. Part L Compliant of UK Building Regulations. Part B Compliant BS476 Parts 21 and 22. Suitable for 30 minute 600mm/15mm single layer Standard Wallboard, 60 minute 600mm/12.5mm twin layer Fireboard and 90 minute 450mm/15mm twin layer Fireboard ceilings. Dimmer compatibility: <https://www.cromptonlamps.com/Catalogue/Phoebe-LED/Downlights/Fire-Rated-Downlights/Firesafe/Firesafe-All-in-One-Integrated-LED-Downlight-Dimmable-85W-3000K-4000K-6500K-12639>

5 YEAR	Manufacturers Warranty
1 YEAR	On-Site Warranty

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com








TECHNICAL INFORMATION

- Connects wirelessly with your home network, no bridge device required
- Home hub compatible
- Smart device compatible, Tuya Smart app required
- 30, 60 & 90 minute fire rated - Fully compliant and certified to BS476 Parts 21 and 22
- Tuneable white 2700K Warm White to 6500K Daylight
- Dimmable Via App or home hub
- 50,000 hours long life maintenance free operation
- Features insulation guards for added ventilation and safety to prevent the Firesafe from being covered by insulation material
- Supplied with separate tool-less loop-in/loop-out constant current driver for quick and easy installation
- Includes 2x quick change bezels in White and Satin Nickel, polished chrome bezel available separately
- IP65 rated
- Constructed from die-cast aluminium
- Instant full light

FIRESAFE SMART

Firesafe Smart All-In-One LED Downlight
Voice and App Controlled Downlight

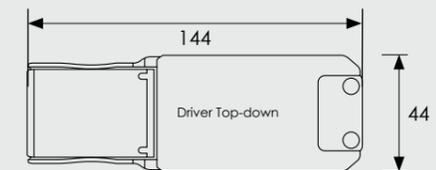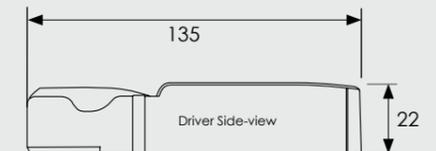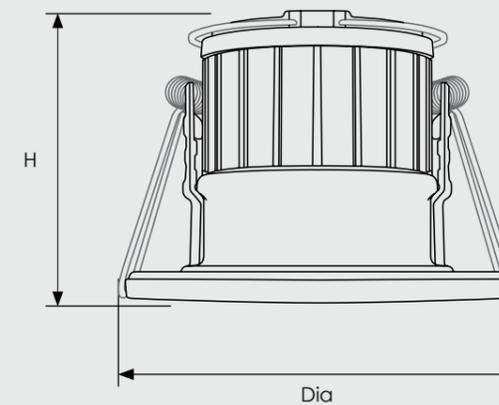

FIRESAFE SMART FIRE-RATED DOWNLIGHT

All-In-One Smart Voice Control Dimmable Downlight



Compatible with Google Home and Amazon Echo

Voice and App Control

Control lights with the touch of a screen or by voice command. Effortlessly instruct lights to turn-on/off, dim down, increase the brightness or change colour temperature.



Custom Lighting Schemes and Commands

Create and store custom lighting schemes and commands to be used when you need them.



Requires WIFI 2.4 GHz 802.11b/g/n and Tuya app for set-up. Dimmable via voice control or app. Not compatible with a physical dimmer.

Fire Rated

30, 60 & 90 minute fire rated. Fully compliant to BS476 Parts 21 and 22.

IP65 Rated

Suitable for use in bathrooms zone 1-2 and outdoor wet weather use. Complete protection against contact dust.

Voice or App Control

Lights can be controlled individually or as a group, allowing them all to be controlled as one via voice command or app.

Easy Install

The quick install loop-in/loop-out constant current driver can be installed during the first phase of a new build or re-wiring project.

Insulation Guards

The adjustable guards prevent the Firesafe from being covered by insulation, improving ventilation and increasing safety.

CLASS 2	DIMMABLE
30, 60 & 90	TUNEABLE WHITE
IP65 RATED	RA \geq 80 CRI RATING

5 YEAR Manufacturers Warranty

1 YEAR On-Site Warranty




Applications

The Firesafe Smart combines both safety and modern wireless functionality. It is an ideal solution for new home build projects, hotels, cafés and apartments.



Interchangeable Bezels

Each Firesafe is supplied with white and brushed nickel effect twist-on interchangeable stylish bezels. (Chrome available separately).

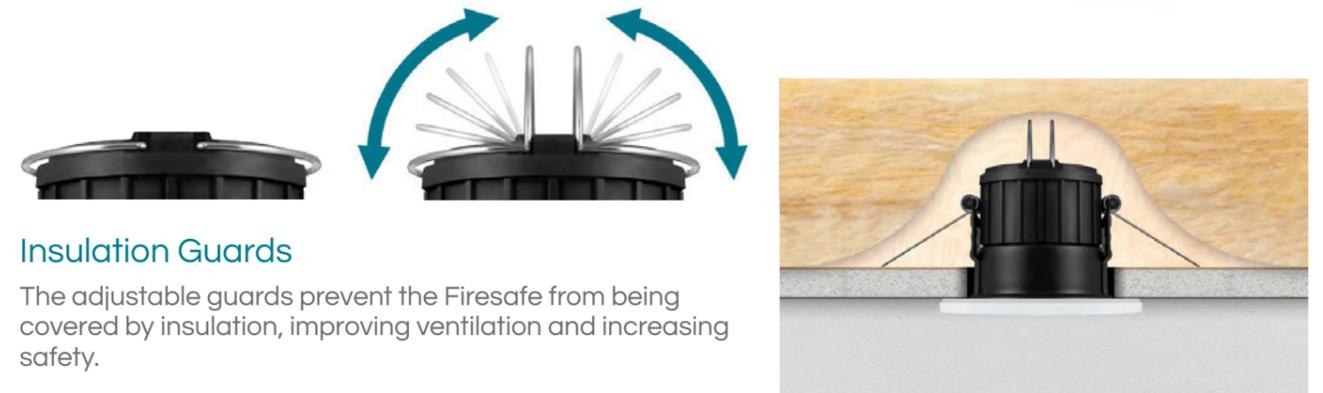

Insulation Guards

The adjustable guards prevent the Firesafe from being covered by insulation, improving ventilation and increasing safety.

Product Code	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)			Order Qty
									Dia	H	Cutout ϕ	
Single Carton												
12851	8.5	240	Warm/Cool/Daylight	2700-6500	650	700	76lm/W	60°	89	65	70-72	1
12646-10	Optional Chrome Bezel - 10 Pack										1	

Installation may require advice from a qualified person. Part L Compliant of UK Building Regulations. Part B Compliant BS476 Parts 21 and 22. Suitable for 30 minute 600mm/15mm single layer Standard Wallboard, 60 minute 600mm/12.5mm twin layer Fireboard and 90 minute 450mm/15mm twin layer Fireboard ceilings.

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com






TECHNICAL INFORMATION

- Twin light outputs can be used together or independently
- Download the Tuya Wifi/Bluetooth control app from Google Play or Apple App Store
- Connects to your home WiFi network with no separate bridge device required
- Fully dimmable spotlight tuneable from 2200K extra warm white to 6500K daylight colour temperature
- 30, 60 & 90 minute fire rated - Fully compliant and certified to BS476 Parts 21 and 22
- Full spectrum RGB/White dimmable halolight with selectable colours
- Supplied with a tool-less loop-in/loop-out quick connector
- Colour rendering index $Ra \geq 80$
- Long life 50,000 hours maintenance free operation
- 100,000 switching cycles
- IP65 rated, suitable for outdoor use
- Instant full light

SPECTRUM

Spectrum LED Fire-Rated Downlight
RGB Colour Change Halo

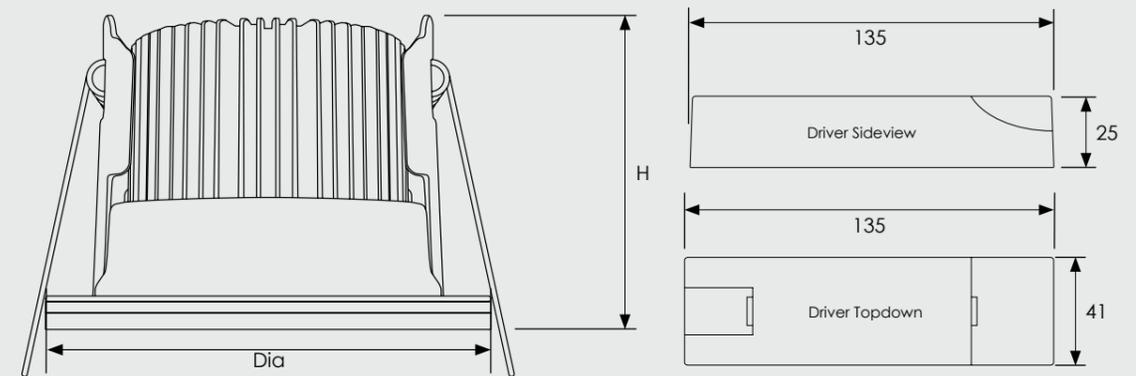

SPECTRUM LED DOWNLIGHT

Twin Light output All-In-One Wifi Downlight




Twin Light Outputs

The twin light outputs can be used together or independently. The spotlight features tuneable white colour temperature (2200-6500) and the Halo rim can have a selected static colour or cycle through the full RGB colour spectrum.



App Control

The twin light outputs can easily be controlled via app control. Quickly change the RGB colour rim or adjust the colour temperature of the main light output with the swipe of a finger.

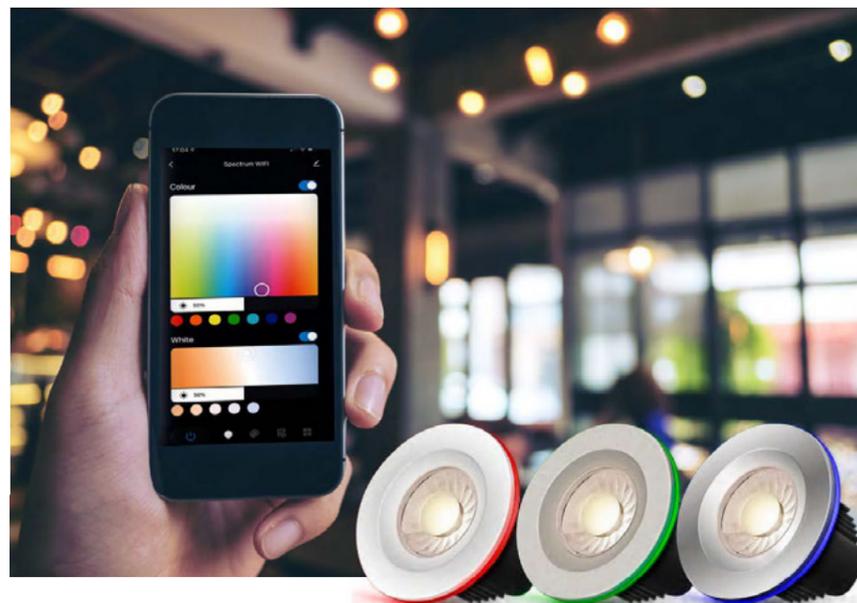

Fire Rated

30, 60 & 90 minute fire rated. Fully compliant to BS476 Parts 21 and 22.

IP65 Rated

Suitable for use in bathrooms zone 1-2 and outdoor wet weather use. Complete protection against contact dust.

Dimmable

Fully dimmable spotlight and halo light. Both lights can be easily dimmed via the impressive and popular Tuya App.

Easy Install

The Spectrum is supplied with a tool-less loop-in/loop-out connector, saving valuable time and making installation fast and easy.

App Control

Control the tuneable spotlight and RGB Halo Rim quickly and easily with a simple swipe of the finger using the Tuya App.

 CLASS 2	 DIMMABLE
 30, 60 & 90	 50,000 HOUR LIFE
 IP65 RATED	 RA ≥80 CRI RATING

5 YEAR Manufacturers Warranty

1 YEAR On-Site Warranty



Applications

Being both fire and IP65 rated, the Spectrum is the perfect solution for commercial applications where safety and style is a priority such as bars, cafés, restaurants and various hospitality premises.

New Features

New features included on the new wifi enabled model include the ability to sync your music to the RGB colour changing rim, set-up events to automatically turn-on/off, colour change, or dim lights accordingly to time/day schedule.



Interchangeable Bezels

Each Spectrum is supplied with three quick-change magnetic bezels that include white, chrome and aluminium effect.



Gloss Black and Antique Brass bezels available separately.



Product Code	Watts (W)	Volts (V)	Colour Appearance Inner/Outer	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)			Order Qty
									Dia	H	Cutout ø	
Spectrum Downlight - Single Carton												
9417b	10	240	CCT/RGB	2200-6500	650	890	65lm/W	40°	80	55	67-70	1
Spectrum Optional Bezels - Single Carton												
10505	Gloss Black Bezel								80			1
10512	Antique Brass Bezel								80			1

Installation may require advice from a qualified person. Part L Compliant of UK Building Regulations. Part B Compliant BS476 9417b - not suitable for insulation over the driver
Parts 21 and 22. Suitable for 30 minute 600mm/15mm single layer Standard Wallboard, 60 minute 600mm/12.5mm twin layer Fireboard and 90 minute 450mm/15mm twin layer Fireboard ceilings.

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com





TECHNICAL INFORMATION

- 30,000 hours rated life
- 50,000 switching cycles
- Constructed from TP(b) rated corrosion resistant thermal plastic and corrosion resistant PS diffuser
- Complies with Building Regulations B2
- Dimmable or non-dimmable
- 3000K warm white or 4000K cool white colour temperatures
- 120° beam angle
- Includes 25cm cable pre-wired to input
- Instant full light
- Surface mount or recessed installation
- IP20 rated for indoor use only

ATLANTA

Atlanta Universal Fit LED Downlight
Available in 18.5W & 6.5W

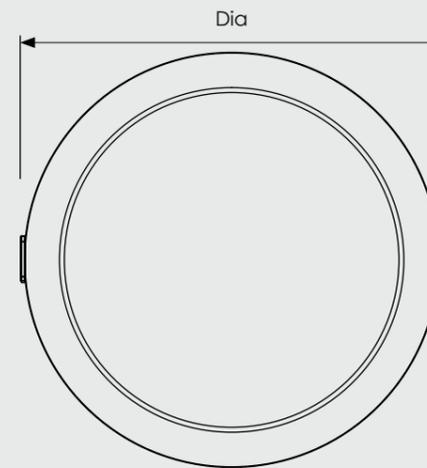

ATLANTA UNIVERSAL FIT LED DOWNLIGHT

Adjustable Universal Fit Slim-line Downlight



Fits Any Recess


The unique bracket enables the Atlanta to fit most ceiling cut-outs and provides uniformity on projects where various cut-out sizes are likely to be encountered.



18.5W bracket adjusts from 65mm to 205mm



6.5W bracket adjusts from 65mm to 102mm

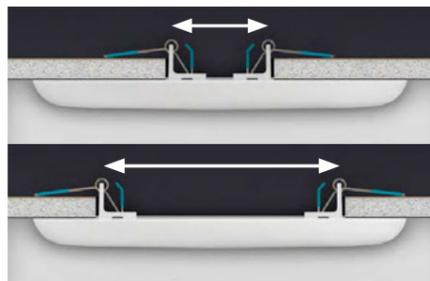

Surface mountable

Slim-line Design for Recessed or Surface Mounting

The Atlanta features a sleek, slim style and compact design with a height of just 15mm for both models. The adjustable clips can be removed allowing the Atlanta to be easily and quickly surface mounted using the robust steel fixing bracket.



Building Regulations

Both the 6.5W and 18.5W models fully comply with building regulations B2.

IP20 Rated

The Atlanta has an IP20 rating making it suitable for indoor use in areas such as corridors, reception areas or stairwells.

Dimmable Models

Featuring a smooth dimmable operation. Designed to ensure compatibility with most LED dimmers.

Adjustable Bracket

To keep installation fast and easy the adjustable bracket has an engraved scale guide ensuring clips are adjusted to correct size.

Flicker-Free

The quality on-board driver ensures the Atlanta emits flicker-free light, helping to eliminate eye-strain and headaches.

CLASS 2	DIMMABLE
Warm White 3000K	Cool White 4000K
IP20 RATED	RA ≥80 CRI RATING

5 YEAR Manufacturers Warranty

1 YEAR On-Site Warranty



Applications

The innovative adjustable bracket makes the Atlanta the perfect choice for retrofit projects in offices, hotels and various retail premises where uniformity from past installations is required.

Dimmable and Non-dimmable Options

The dimmable models are compatible with both leading and trailing edge dimmers.



Emergency Conversion Pack

Convert the Atlanta Universal Downlights into emergency versions. The pack features a 3-hour run-time, removable end-caps and quality NiMH battery. (For Non-dim Atlanta models only).

- 3-hour run-time
- NiMH battery
- Removable end caps for easy wiring
- For Atlanta Downlight range only
- 24 hour charge time

1 YEAR

Emergency Battery Warranty



Product Code	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)			Order Qty
								Dia	H	Cutout ø	
Non-Dimmable - Single Carton											
10536	18.5	240	Warm White	3000	1550	84lm/W	120°	230	15	63.5-203	1
10543	18.5	240	Cool White	4000	1600	86lm/W	120°	230	15	63.5-203	1
Dimmable - Single Carton											
12172	6.5	240	Warm White	3000	440	68lm/W	120°	120	15	63.5-102	1
12189	6.5	240	Cool White	4000	460	71lm/W	120°	120	15	63.5-102	1
12196	18.5	240	Warm White	3000	1550	84lm/W	120°	230	15	63.5-203	1
12202	18.5	240	Cool White	4000	1600	86lm/W	120°	230	15	63.5-203	1
Emergency Conversion Pack - Single Carton											
RBF230/4/M3	Dimensions (mm) = Compact - 270mm x 68mm, Extended - 515mm x 42mm									1	

Dimmable model is compatible with most LED dimmer switches. Emergency conversion pack suitable for Non-dimmable models only

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com






TECHNICAL INFORMATION

- 35,000 hours long life maintenance free operation
- Constructed from an aluminium body with a polycarbonate diffuser
- Tri-colour selection switch 3000K/4000K and 6000K
- High efficiency 120lm/W
- Standard 4ft or 5ft lengths
- Colour rendering index Ra \geq 80
- Not suitable for dimming

PHOTIUS

Photius Integrated LED Batten
IP42 High Efficiency Batten

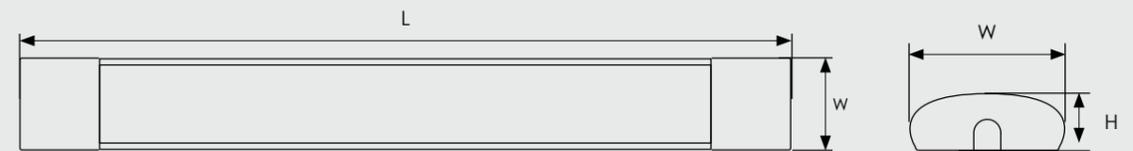

PHOTIUS INTEGRATED LED BATTEN

IP42 Flicker-free Tri-colour Select LED Batten



3-Hour Emergency Model

- Discharge \geq 3 Hours at 960lm
- 24 hours charge time
- Built-in emergency test-function

1 YEAR Emergency Battery Warranty




Microwave Sensor Model

- 6m max detection range
- 5secs - 10min hold time
- 120° detection angle
- Easy access module for quick adjustment to sensor settings



Suspension and Surface Mountable

The Photius has a sleek, slim style and compact design with a height of just 36mm and is suitable for suspension or surface mounting.

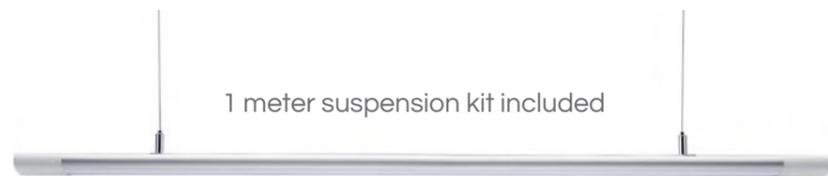

1 meter suspension kit included

Not suitable for dimming.

Slim & Stylish Design

The Photius has a slim and sleek design, offering both style and quality light.

IP42 Rated

The IP42 rating makes the Photius perfectly suited for a variety of indoor office work environments and conditions.

High Efficiency


The Photius offers high efficiency at 120lm/W, combining efficiency with performance, style and easy installation.

Flicker-Free

A key feature of the Photius is that it emits flicker-free light, helping to create a more comfortable lighting environment.

Tri-Colour Selection

The easy access switch allows the colour temperature to be quickly changed between 3000K, 4000K or 6000K.

35,000 HOUR LIFE	 CLASS 1
120lm/W EFFICIENCY	 TRI-COLOUR
IP42 RATED	RA \geq80 CRI RATING

5 YEAR Manufacturers Warranty

1 YEAR On-Site Warranty



Applications

The stylish, slim-line Photius is the ideal solution for settings such as offices, hotels and other commercial applications that require quality light.

Quick and Easy Installation

Standard and microwave sensor feature quick 3-way terminal block for quick installation.

The emergency model features 4-way terminal block for quick installation and continuous live feed.



Easy Access Switch

The end cap can be removed to allow fast access to the colour changing switch.



Product Code	Watts (W)	Volts (V)	Product Description	Colour Temp (K)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)			Order Qty
								W	H	L	
Standard - Single Carton											
12219	40	240	4ft Standard	3000/4000/6000	4800	120lm/W	120°	80	36	1190	1
12240	60	240	5ft Standard	3000/4000/6000	7200	120lm/W	120°	80	36	1490	1
Microwave Sensor* - Single Carton											
12226	40	240	4ft Microwave Sensor	3000/4000/6000	4800	120lm/W	120°	80	36	1190	1
12257	60	240	5ft Microwave Sensor	3000/4000/6000	7200	120lm/W	120°	80	36	1490	1
3-Hour Emergency** - Single Carton											
12233	40	240	4ft Emergency Sensor	3000/4000/6000	4800	120lm/W	120°	80	36	1190	1
12264	60	240	5ft Emergency Sensor	3000/4000/6000	7200	120lm/W	120°	80	36	1490	1

* 6m Detection range. 5s-10min Hold time 5-∞ lum light sensor Instant off or 20% light output after hold time when sensor not triggered. 30s-∞ dimming level hold.

** Emergency Discharge \geq 3 Hours at 960lm, 24 hour charge time required. Built in Emergency test function. Fitted with a 4 Way Terminal block for Permanent Live.

Tel: 01274 657 088

Email: sales@cromptonlamps.com

Web: www.cromptonlamps.com




TECHNICAL INFORMATION

- Constructed from robust steel body with Polycarbonate diffuser
- 3000K/4000K/5700K Tri-Colour Select
- 50,000 hour average life
- 100,000 switching cycles
- Toolless terminal block design
- Flip down end-caps for easy entry to fitting internals/CCT switch
- 120° beam angle
- IP20 rated for indoor use
- Colour rendering index ≥ 80
- Replaceable battery
- Ambient operating temp. -20°C to 40°C (0°C to 40°C for Emergency versions)
- Available with 3 hour emergency function



ORACLE

Oracle Integrated LED Batten
IP20 Fast Install Batten

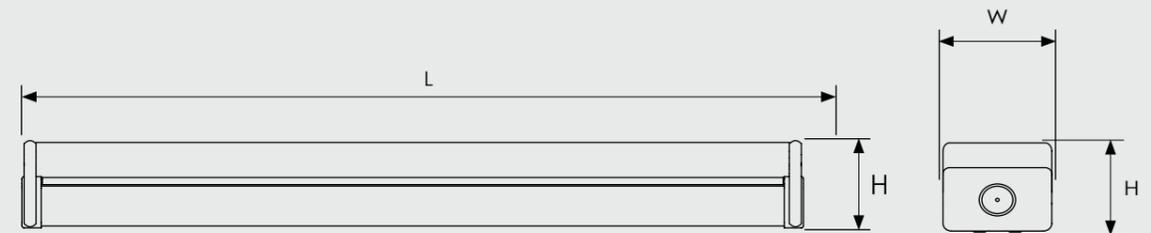

ORACLE INTEGRATED LED BATTEN

IP20 Easy Installation Tri-colour Select LED Batten



3-Hour Emergency Models

- 3 hours discharge time
- 24 hours charge time
- Available in 4ft, 5ft and 6ft lengths (High Output also available)

1 YEAR Emergency Battery Warranty



High-Output Models

- Available in 40W, 60W and 80W
- Available in 4ft, 5ft and 6ft lengths
- High efficiency = 100lm/W



Not suitable for dimming.

Durable Construction

The Oracle features a robust steel construction and shatterproof diffuser.

IP20 Rated

The IP20 rating makes the Oracle perfectly suited for a variety of indoor office work environments and conditions.

Fast Install Terminal


To assist with making installation quick and easy, the Oracle features a 3-way terminal block.

Flip-down End Caps

The Oracle's end caps can be easily flipped down, allowing fast access to the colour changing technology (CCT) switch.

Tri-Colour Selection

The easy access switch allows the colour temperature to be quickly changed between 3000K, 4000K or 5700K.

50,000 HOUR LIFE	 CLASS 1
100lm/W EFFICIENCY	 TRI-COLOUR
IP20 RATED	RA ≥80 CRI RATING

5 YEAR Manufacturers Warranty

1 YEAR On-Site Warranty



Applications

The reliable, robust and dependable Oracle is the perfect solution for settings such as offices, hotels and other commercial areas where quality light and reliability is required.



Easy Access Switch

The Oracle features flip-down end caps allowing quick and easy access to the colour changing technology (CCT) switch. Users can choose and switch between 3000K, 4000K or 5700K.

DALI Driver and PIR plug-in options also available. Please ask the sales team for more information.

Product Code	Watts (W)	Volts (V)	Product Description	Colour Temp (K)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)			Order Qty
								W	H	L	
Standard - Single Carton											
14350	20	240	4ft Standard	3000/4000/5700	2000	100lm/W	120°	85	75	1200	1
14374	30	240	5ft Standard	3000/4000/5700	3000	100lm/W	120°	85	75	1500	1
14398	40	240	6ft Standard	3000/4000/5700	4000	100lm/W	120°	85	75	1800	1
Emergency - Single Carton											
14367	20	240	4ft Emergency	3000/4000/5700	2000	100lm/W	120°	85	75	1200	1
14381	30	240	5ft Emergency	3000/4000/5700	3000	100lm/W	120°	85	75	1500	1
14404	40	240	6ft Emergency	3000/4000/5700	4000	100lm/W	120°	85	75	1800	1
High Output - Single Carton											
14411	40	240	4ft High Output	3000/4000/5700	4000	100lm/W	120°	85	75	1200	1
14435	60	240	5ft High Output	3000/4000/5700	6000	100lm/W	120°	85	75	1500	1
14459	80	240	6ft High Output	3000/4000/5700	8000	100lm/W	120°	85	75	1800	1
Emergency High Output - Single Carton											
14428	40	240	4ft HO Emergency	3000/4000/5700	4000	100lm/W	120°	85	75	1200	1
14442	60	240	5ft HO Emergency	3000/4000/5700	6000	100lm/W	120°	85	75	1500	1
14466	80	240	6ft HO Emergency	3000/4000/5700	8000	100lm/W	120°	85	75	1800	1

Emergency Discharge ≥ 3 Hours, 24 hour charge time required.
Suspension kit not included

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com






TECHNICAL INFORMATION

- Suitable for conduit, surface, or suspension mounting
- Constructed from tough IK08 impact rated, moisture and acid resistant Polycarbonate body and diffuser
- IP65 rated for wet weather outdoor use
- 3000K/4000K/5700K Tri-Colour Select
- Pre-wired with toolless spade terminals with pass-through loop-in loop-out including permanent live for use with emergency models
- 50,000 hour long life
- 100,000 switching cycles
- 120° beam angle
- Colour rendering index ≥ 80
- Ambient operating temp. -20°C to 40°C (0°C to 40°C for Emergency versions)
- Available with 3 hour emergency function

LYKOS

Lykos Integrated LED Batten
IP65 Non-Corrosive LED Batten

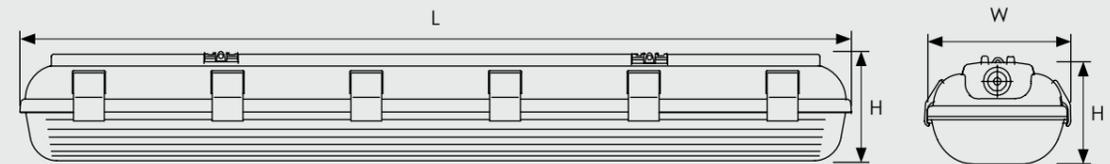

LYKOS IP65 INTEGRATED LED BATTEN

Robust IP65 Non-Corrosive Tri-colour Select LED Batten



Suitable for conduit, suspension and surface mounting.



3-Hour Emergency Models

- 3 hours discharge time
- 24 hours charge time
- Available in 4ft, 5ft and 6ft lengths (High Output also available)

1 YEAR Emergency Battery Warranty



High-Output Models

- Available in 40W, 60W and 80W
- Available in 4ft, 5ft and 6ft lengths
- High efficiency = 100lm/W

6ft only available in High Output
Not suitable for dimming.

IK08 Impact Rating

Constructed from tough IK08 moisture and acid resistant polycarbonate.

IP65 Rated

The IP65 rating makes the Lykos perfectly suited for a wide variety of outdoor environments and conditions.

Operating Temp.

The Lykos can operate in a wide temperature range of -20° to 40° without any issue. (Emergency versions = 0° to 40°).

Loop-in/Loop-Out

A key feature of the Lykos is the two tool-less loop through terminal blocks that allows for single or for fitting-to-fitting installation.

Tri-Colour Selection

The easy access switch allows the colour temperature to be quickly changed between 3000K, 4000K or 5700K.

50,000 HOUR LIFE	
IK08 RATED	
IP65 RATED	RA ≥80 CRI RATING

5 YEAR Manufacturers Warranty

1 YEAR On-Site Warranty



Applications

The Lykos IP65 batten offers dependability, reliability and toughness, making it ideally suited for use in a variety of outdoor/wet condition settings such as undercover car-parks, industrial workplaces and warehouses.

Fast Loop Through Terminal Blocks

Features two tool-less loop through terminal blocks (emergency model has continuous live feed) for easy install of multiple luminaires.



Anti-Vandal Clips

The Lykos features anti-vandal stainless steel clips, offering extra security and durability.



DALI Driver and PIR plug-in options also available. Please ask the sales team for more information.

Product Code	Watts (W)	Volts (V)	Product Description	Colour Temp (K)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)			Order Qty
								W	H	L	
Standard - Single Carton											
14251	20	240	4ft Standard	3000/4000/5700	2000	100lm/W	120°	80	72	1200	1
14275	30	240	5ft Standard	3000/4000/5700	3000	100lm/W	120°	80	72	1500	1
Emergency - Single Carton											
14268	20	240	4ft Emergency	3000/4000/5700	2000	100lm/W	120°	80	72	1200	1
14282	30	240	5ft Emergency	3000/4000/5700	3000	100lm/W	120°	80	72	1500	1
High Output - Single Carton											
14299	40	240	4ft High Output	3000/4000/5700	4000	100lm/W	120°	105	87	1200	1
14312	60	240	5ft High Output	3000/4000/5700	6000	100lm/W	120°	105	87	1500	1
14336	80	240	6ft High Output	3000/4000/5700	8000	100lm/W	120°	105	87	1800	1
Emergency High Output - Single Carton											
14305	40	240	4ft Emergency HO	3000/4000/5700	4000	100lm/W	120°	105	87	1200	1
14329	60	240	5ft Emergency HO	3000/4000/5700	6000	100lm/W	120°	105	87	1500	1
14343	80	240	6ft Emergency HO	3000/4000/5700	8000	100lm/W	120°	105	87	1800	1

Emergency Discharge ≥ 3 Hours, 24 hour charge time required.
Suspension kit not included

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com







TECHNICAL INFORMATION

- 30,000 hour long life maintenance free operation
- 60,000 switching cycles
- Constructed from aluminium frame and housing with polycarbonate diffuser
- UGR<19 600 x 600 and 1200x300 models TPa rated
- 40W 600 x 600 model TPb rated
- -20° to 40° operating temperature
- Backlit LED technology with high efficiency upto 100lm/W
- IP20 rated for indoor use only
- Instant full light
- 3-hour emergency function conversion kit
- LED charge indicator
- Built-in NiMH battery for safe, stable and long lasting operation (1 year warranty)


GALANOS ARTESON

Galanos Arteson Backlit LED Panel
600 x 600 & 1200 x 300 Flicker-free LED Panels

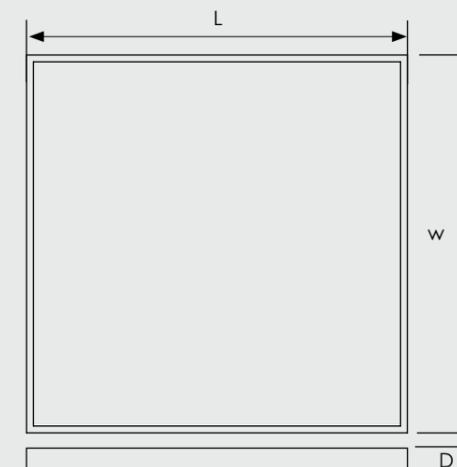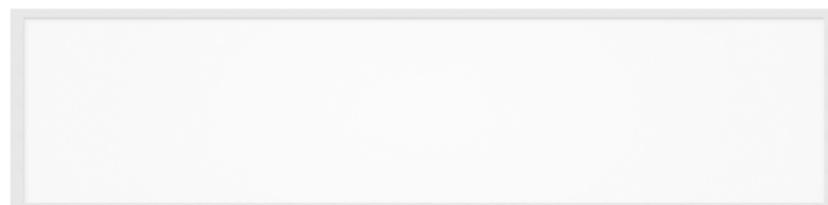

GALANOS ARTESON BACKLIT LED BATTEN

High-Efficiency Backlit LED Panel

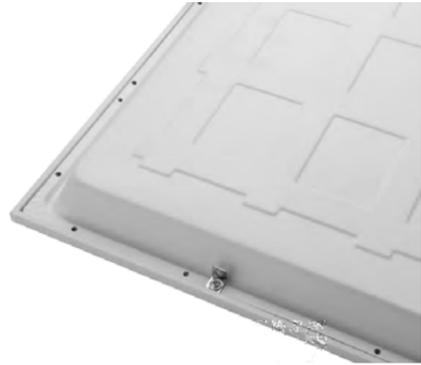

UGR<19 Model

TPa Rated - The Galanos Arteson UGR<19 model is rated to TPa standards.

38 WATTS	IP20 RATED
100lm/W EFFICIENCY	30,000 HOUR LIFE

600 x 600 - TPb Rated

The Galanos Arteson 600 x 600 model is rated to TPb standards.

1200 x 300 - TPa Rated

The Galanos Arteson 1200 x 300 model is rated to TPa standards.

High Efficiency

Both 40W models offer high efficiency at 80lm/W, combining efficiency with reliability and quality light output.

UK Emergency Kits

UK sourced Emergency kits are available for the Galanos Arteson range. Please contact us for more information.

40 WATTS	30,000 HOUR LIFE
80lm/W EFFICIENCY	IP20 RATED

5 YEAR Manufacturers Warranty

1 YEAR On-Site Warranty

Backlit LED Technology

The impressive backlit LED technology ensures that the Galanos Arteson range emits even quality light across the entire panel, improving efficiency and standard of light output.

Emergency Kit

The optional emergency kit converts the Arteson panels into emergency versions. (For use with Galanos Arteson range only).

- 3-hour run-time
- Built-in lithium battery

1 YEAR Emergency Battery Warranty



Not suitable for dimming.



Applications

The Galanos Arteson's reliability and dependability make it ideally suited for settings such as offices, hospitality and other commercial applications that require quality light.

Surface and Suspension Mountable

The Galanos Arteson range can be surface or suspension mounted. Mounting accessories are available to ensure that the Arteson can be installed in a variety of settings.



Various driver options and controls options available - please contact us for further information

Product Code	Watts (W)	Volts (V)	Product Description	Colour Temp (K)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)			Order Qty
								W	L	D	
Low Glare UGR19 600 x 600 - Single Carton											
14121	38	240	TP(a) 600 x 600 UGR<19 Panel	3000	3800	100lm/W	110°	595	595	30	1
14138	38	240	TP(a) 600 x 600 UGR<19 Panel	4000	3800	100lm/W	110°	595	595	30	1
600 x 600 - Single Carton											
14473	40	240	TP(b) 600 x 600 Panel	3000	3200	80lm/W	110°	595	595	30	1
14480	40	240	TP(b) 600 x 600 Panel	4000	3200	80lm/W	110°	595	595	30	1
14497	40	240	TP(b) 600 x 600 Panel	6000	3200	80lm/W	110°	595	595	30	1
1200 x 300 - Single Carton											
14503	40	240	TP(a) 1200 x 300 Panel	4000	3200	80lm/W	110°	295	1195	30	1
Accessories - Single Carton											
14527	3-Hour Emergency Kit for Galanos Arteson Panel							73	212	28	1
14510	Wire Suspension Kit for Galanos Arteson Panel							50 to 950mm drop			1
14534	600 x 600 Surface Mounting Kit for Galanos Arteson Panel							600	600	65	1
14541	1200 x 300 Surface Mounting Kit for Galanos Arteson Panel							300	1200	65	1

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com





TECHNICAL INFORMATION

- Dual wattage selection switch
- 1000lm total lumens at 11W, 1500lm total lumens at 15W
- IP65 rated suitable for outdoor use
- Tri-colour select: 3000K warm white, 4000K cool white and 6500K daylight colour options
- Flicker Free Illumination
- Built-in safety isolating control gear with short circuit protection
- Toolless terminal block with loop-in loop-out function
- Long life 35,000 hours maintenance free operation
- Side conduit or rear entry
- White finish with opal diffuser
- Tough polycarbonate construction IK10 impact rating
- Tamper resistant security screw
- Not suitable for dimming

Emergency Models



- Integrated 3-hour emergency function

Sensor Models

- Built-in Microwave Sensor: with variable detection, hold-time, daylight threshold, stand-by timer and dimming level

MELANA

Melana Round LED Bulkhead
IP65 with Dual Wattage Selection

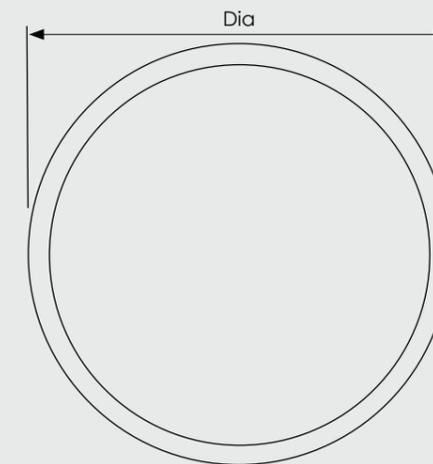

MELANA ROUND LED BULKHEAD

IP65 Rated Dual Wattage Tri-Colour Select Bulkhead



Adjustable Wattage

The wattage can be switched between 11W or 15W.

Fast and Easy Installation with Side Conduit Entry


The Melana features a tool-less loop-in/loop-out connector and side conduit entry, making installation fast and easy.



IP65
RATED

Tri-Colour Selection

The colour temperature can be quickly selected or changed from 3000K, 4000K or 6500K.

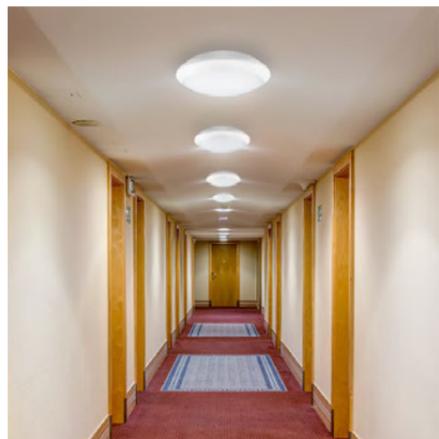

Not suitable for dimming.

IP65 Rated

The IP65 rating allows the Melana to be utilised in a variety of outdoor settings.

Robust and Reliable

Featuring an IK10 impact rating and constructed from tough corrosion-resistant plastic the Melana is both robust and reliable.

Microwave Sensor

The microwave sensor models feature dusk-til-dawn functionality, lighting areas in low light conditions when required.

3-Hour Emergency

The 3-hour emergency models feature an integrated emergency module with internal indicator light.

Flicker-Free

A key feature of the Melana is that it emits flicker-free light, helping to create a more comfortable lighting environment.

11/15 WATTS	IK10 RATED
CLASS 2	TRI-COLOUR
IP65 RATED	RA ≥80 CRI RATING

5 YEAR Manufacturers Warranty

1 YEAR On-Site Warranty



Applications

With an IP65 rating and tough construction, the Melana is an ideal solution for outdoor applications where moisture is likely to be encountered such as external hospitality, hotel or office building walls or ceilings.

Optional Eyelid or Grill Cover

The optional eyelid and grill cover features a robust, corrosion-resistant construction and IP65 rating.

1 YEAR Emergency Battery Warranty



Product Code	Watts (W)	Volts (V)	Product Finish	Colour Temp (K)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)		Order Qty
								Dia	H	
Standard - Single Carton										
14145	11 or 15	240	White	3000/4000/6500K	11W 1000/15W 1500	80lm/W	120°	300	85	1
Microwave Sensor* - Single Carton										
14152	11 or 15	240	White	3000/4000/6500K	11W 1000/15W 1500	80lm/W	120°	300	85	1
3-Hour Emergency** - Single Carton										
14169	11 or 15	240	White	3000/4000/6500K	11W 1000/15W 1500	80lm/W	120°	300	85	1
Microwave Sensor* and 3-Hour Emergency** - Single Carton										
14176	11 or 15	240	White	3000/4000/6500K	11W 1000/15W 1500	80lm/W	120°	300	85	1
Optional Eyelid Cover - Single Carton										
14688			White					300		1
Optional Grille Cover - Single Carton										
14695			White					300		1

Unable to override microwave sensor

* Microwave sensor with variable range, hold time, daylight threshold, stand-by period and stand-by dimming level.

** Charging time 24hrs - Running time 3hrs at reduced output.

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com





TECHNICAL INFORMATION

- 12W 1000lm total lumens, 8W 1800lm total lumens
- Tri-colour select: 3000K warm white, 4000K cool white and 6500K daylight colour options
- Flicker free illumination
- Built-in safety isolating control gear with short circuit protection
- Toolless terminal block with loop-in loop-out function
- Long life 35,000 hours maintenance free operation
- White finish with opal diffuser
- Tough polycarbonate construction IK10 impact rating
- IP65 rated suitable for damp and humid conditions
- Recommended for indoor use
- Not suitable for dimming

Emergency Models


- Integrated 3-hour emergency function

Sensor Models

- Built-in Microwave Sensor: with variable detection, hold-time, daylight threshold, stand-by timer and dimming level

SAVOCA

Savoca LED Internal Ceiling Light
IP65 Tri-Colour Select

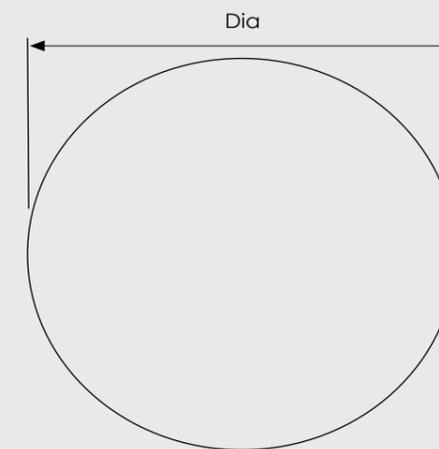


SAVOCA LED INTERNAL CEILING LIGHT

IP65 Rated Tri-Colour Select




Loop-In/Loop-Out

The Savoca features an easy access tool-less loop-in/loop-out connector, saving valuable time and making installation fast and easy.

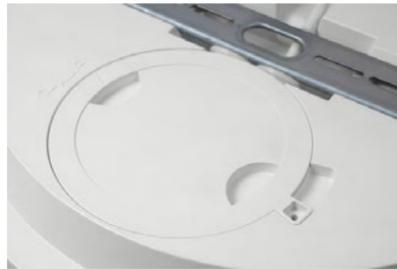

Tri-Colour Select

The colour temperature can be quickly selected or changed from 3000K, 4000K or 6500K.

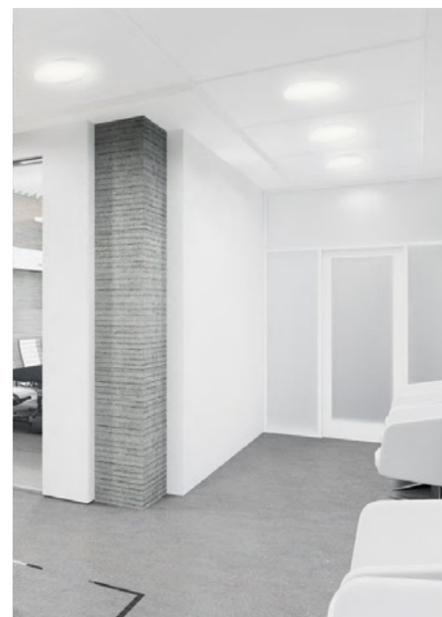

Not suitable for dimming.

1 YEAR Emergency Battery Warranty



Slim-line Design

The slim-line design ensures the Savoca is at home in any office or work environment.

Flicker-Free

A key feature of the Savoca is that it emits flicker-free light, helping to create a more comfortable lighting environment.

Microwave Sensor

The microwave sensor models feature dusk-til-down functionality, lighting areas in low light conditions when required.

3-Hour Emergency

The 3-hour emergency models feature an integrated emergency module with internal indicator light.

Stylish and Reliable

Featuring an IK10 impact rating and constructed from tough corrosion-resistant plastic the Savoca is stylish & durable.

100lm/W EFFICIENCY	IK10 RATED
CLASS 2	TRI-COLOUR
IP65 RATED	RA ≥80 CRI RATING

5 YEAR Manufacturers Warranty

1 YEAR On-Site Warranty



Applications

The slim-line design and flicker-free light output make the Savoca the ideal choice for work environments such as offices, clinics, hotels and other hospitality applications.

Robust and Reliable

The Savoca features a tough polycarbonate construction with an IK10 impact rating for added durability.



Features a push-fit bracket with a push-button release for easy maintenance.



IP65
RATED

Product Code	Watts (W)	Volts (V)	Product Finish	Colour Temp (K)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)		Order Qty
								Dia	H	
Standard - Single Carton										
14589	12	240	White	3000/4000/6500K	1000	83lm/W	120°	300	59	1
14626	18	240	White	3000/4000/6500K	1800	100lm/W	120°	300	59	1
Microwave Sensor* - Single Carton										
14596	12	240	White	3000/4000/6500K	1000	83lm/W	120°	300	59	1
14633	18	240	White	3000/4000/6500K	1800	100lm/W	120°	300	59	1
3-Hour Emergency** - Single Carton										
14602	12	240	White	3000/4000/6500K	1000	83lm/W	120°	300	59	1
14640	18	240	White	3000/4000/6500K	1800	100lm/W	120°	300	59	1
Microwave Sensor* and 3-Hour Emergency** - Single Carton										
14619	12	240	White	3000/4000/6500K	1000	83lm/W	120°	300	59	1
14657	18	240	White	3000/4000/6500K	1800	100lm/W	120°	300	59	1

* Microwave sensor with variable range, hold time, daylight threshold, stand-by period and stand-by dimming level.
 ** Charging time 24hrs - Running time 3hrs at reduced output.

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com






TECHNICAL INFORMATION

- High efficiency
- Tough and lightweight aluminium construction with IK10 impact rating and black finish
- Driver housing away from main body to maximise ventilation and prevent heat build-up to prolong life
- Glass free construction - suitable for farming, agriculture and food preparation areas
- Available in 90° and 60° beam angles
- 50,000 hour life
- 4000K cool white colour temperature
- Colour rendering index $Ra \geq 80$
- Instant full light



KETO

Keto Commercial High Bay
High Powered With Surge Protection

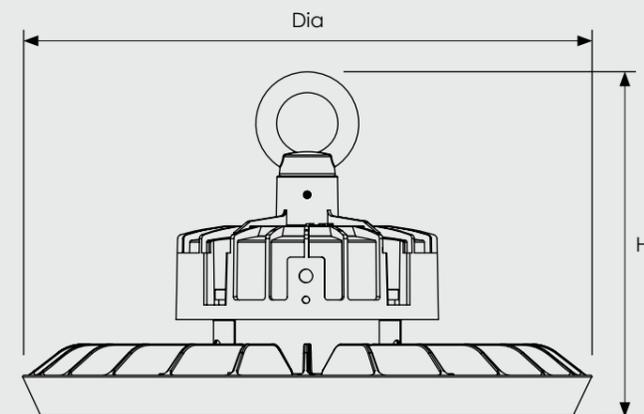

KETO LED HIGH BAY

High Powered Surge Protected Commercial High Bay



No Heat Build-up

Driver is located away from the main body and heat sink creating better ventilation and allowing heat to dissipate. The fins allow heat to pass through, helping to keep the Keto cool.



Flicker-Free and Anti-Glare

The Keto emits flicker-free and anti-glare light, helping to create a more comfortable lighting environment.



Emergency Models

Emergency models are ideal for situations where emergency lighting is required in spaces such as warehouses or food processing plants.

- 3-hour emergency function
- EN60598-2-22-2015 emergency luminaire compliant
- Remote emergency driver with replaceable LiFePo4 6.4 3.0Ah 1800mAh rechargeable battery
- Test function and LED indicator
- 24 hour charge time
- Lightweight aluminium construction with black finish
- IP65 rated
- Suitable for use with Keto Microwave Motion Sensor



1 YEAR Emergency Battery Warranty

Emergency Pack Dimension:
Depth = 61mm
Height = 388mm
Width = 93mm

Glass Free Build

The Keto features a glass-free construction and a shatterproof diffuser.

IK10 Rated

Protected against 20 joules of impact. Equivalent impact of 5KG mass dropped from 400mm above the impacted surface

High Efficiency

The Keto features $\geq 96\text{lm/W}$ high efficiency making it extremely energy efficient while still offering high performance.

Operating Temperature

The Keto can operate in temperatures between -40° to 45° without issue. Making it suitable for a variety of settings.

Surge Protection

All Keto's in the range have 4KV surge protection, offering extra safety and reliability.

CLASS 1	≥ 25 UGR
RA ≥ 80 CRI RATING	Cool White 4000K
IP65 RATED	IK10 RATED

5 YEAR Manufacturers Warranty

1 YEAR On-Site Warranty



Applications

Designed and developed to be versatile and dependable, the Keto is an ideal solution for a wide range of industrial lighting applications such as warehouses, farming/agriculture and food/drink processing.

Microwave Motion Sensor Module

The microwave sensor module attaches safely and securely with the robust metal arm and offers a range of functions via the remote control.

- Detection area 25%, 50%, 75%, 100% (15m maximum mounted height)
- Detection range Max (D x H): 16m x 15m
- Hold time 5s, 30s, 1min, 3min, 5min, 10min, 20min, 30min
- Daylight threshold 2Lux, 10Lux, 30Lux, 50Lux, 80Lux, 120Lux, Disable
- Stand-by period 0s, 10s, 30s, 1min, 5min, 10min, 30min
- Stand-by dimming level 10%, 20%, 30% 50%
- Separate remote control unit required (Product Code: 14732)



Product Code	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Keto High Bay Dimensions (mm)		Order Qty
									Dia	H	
90° - Single Carton											
12431	100	240	Cool White	4000	9800	13000	98lm/W	90°	275	166	1
12448	150	240	Cool White	4000	14500	18000	97lm/W	90°	285	166	1
12455	200	240	Cool White	4000	19100	24000	96lm/W	90°	305	183	1
60° - Single Carton											
12462	100	240	Cool White	4000	9800	13000	98lm/W	60°	275	166	1
12479	150	240	Cool White	4000	14500	18000	97lm/W	60°	285	166	1
12486	200	240	Cool White	4000	19100	24000	96lm/W	60°	305	183	1
Emergency 90° - Single Carton											
15029	100	240	Cool White	4000	9800	13000	98lm/W	90°	275	166	1
15036	150	240	Cool White	4000	14500	18000	97lm/W	90°	285	166	1
15043	200	240	Cool White	4000	19100	24000	96lm/W	90°	305	183	1
Emergency 60° - Single Carton											
15050	100	240	Cool White	4000	9800	13000	98lm/W	60°	275	166	1
15067	150	240	Cool White	4000	14500	18000	97lm/W	60°	285	166	1
15074	200	240	Cool White	4000	19100	24000	96lm/W	60°	305	183	1
Microwave Sensor Module											
14107	Phoebe LED Keto Microwave Sensor Module										1
14732	Phoebe LED Keto Microwave Sensor Remote Control										1


Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com







TECHNICAL INFORMATION

- 30,000 hours average rated life
- 15,000 switching cycles
- Die-cast aluminium with tempered glass lens IK04 Rating
- Black powder coating
- IP65 rated - suitable for outdoor use
- Adjustable bracket to 360°
- 110° beam angle
- Fitted with 1m TRS cable
- Ambient operating temperature -20°C to 45°C
- Instant full light

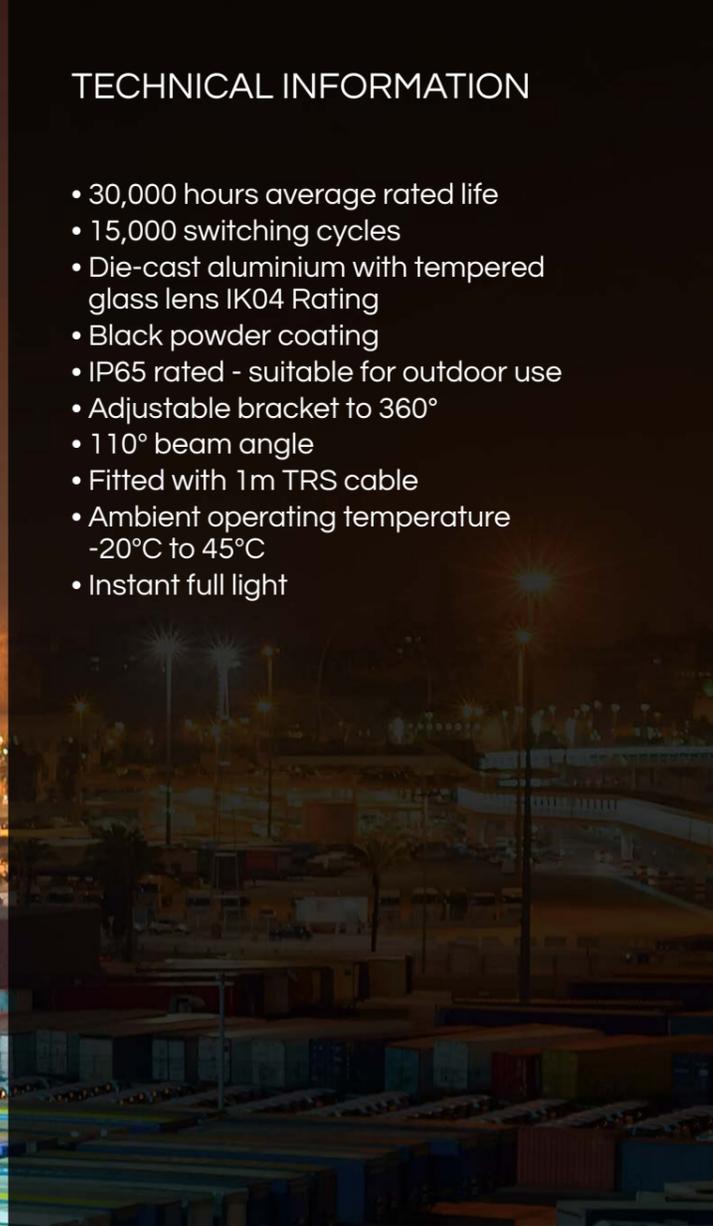

ATLAS COMMERCIAL

Atlas Commercial High Powered Floodlight
Available With Photocell Sensor

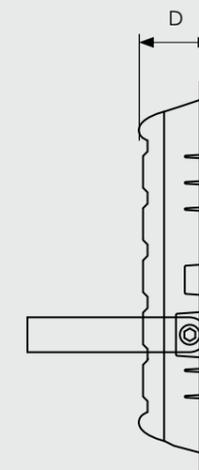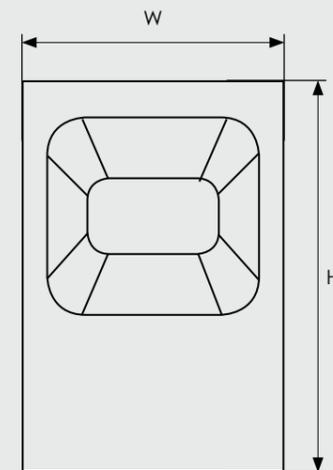

ATLAS COMMERCIAL LED FLOODLIGHT

Available with or without Photocell Sensor



Durable Construction

Protected against 0.5 joules of impact dropped from 200mm above surface.

IP65 Rated

The IP65 rating ensures the Atlas Commercial can operate without issue in a variety of wet outdoor conditions.

High Powered

Available in 100W, 150W, and 200W the Atlas Commercial can illuminate large outdoor industrial areas with ease.

Adjustable Bracket

The 360° adjustable mounting bracket allows the installer to position the Atlas to direct light and illuminate a specific area.

Photocell Sensor

The Photocell Sensor models feature dusk-til-dawn photocell functionality, lighting areas in low light conditions when required.

360°

Adjustable 360° Bracket

The 360 degrees adjustable mounting bracket allows for easier installation in a variety of mounting positions.

360°

100W
9900lm total lumens
8400lm useful lumens
84lm/W

150W
15600lm total lumens
13200lm useful lumens
88lm/W

200W
20200lm total lumens
17100lm useful lumens
86lm/W

Not suitable for dimming.

	360° BRACKET
≥ 84lm/W EFFICIENCY	Cool White 4000K
IP65 RATED	RA ≥70 CRI RATING

5 YEAR Manufacturers Warranty



Applications

The Atlas Commercial is the perfect solution for lighting projects that require large outdoor areas to be illuminated such as car parks, shipping yards, construction sites or up-lighting buildings.

IP65 Rating

The Atlas Commercial features an IP65 rating offering complete protection against contact dust and water.

Photocell Models

Photocell models automatically illuminate in low lux level settings thanks to the dusk-til-dawn feature.



Product Code	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)			Weight (kg)	Order Qty
									W	H	D		
Standard - Single Carton													
12103	100	240	Cool White	4000	8400	9900	84lm/W	110°	257	340	59	3.4	1
12110	150	240	Cool White	4000	13200	15600	88lm/W	110°	280	374	63	4.1	1
12127	200	240	Cool White	4000	17100	20200	86lm/W	110°	299	414	69	5	1
Photocell Sensor - Single Carton													
14183	100	240	Cool White	4000	8400	9900	84lm/W	110°	257	340	59	3.4	1
14190	150	240	Cool White	4000	13200	15600	88lm/W	110°	280	374	63	4.1	1
14206	200	240	Cool White	4000	17100	20200	86lm/W	110°	299	414	69	5	1

Terminal block not included. Installation may require advice from a qualified person.

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com





TECHNICAL INFORMATION


- Long life 35,000 hours maintenance free operation, 15,000 switching cycles
- Fully IP65 rated, including the PIR sensor - suitable for use outdoors
- -20°C to 40°C operating temperature
- Die-cast aluminium with black powder coat finish, stylish thin body design
- Angled mounting bracket for ease of installation without the need to disassemble the fitting
- Includes 80cm VDE cable

PIR Sensor Models

- Controls for sensitivity, time and lux levels
- 120° monitoring angle
- Override option for PIR models*
- Max detection range selectable up to 8m
- Light hold after detection selectable from 10 seconds to 7 minutes

ATLAS MINI

Atlas Mini Slim-line Floodlight
Available With PIR Sensor

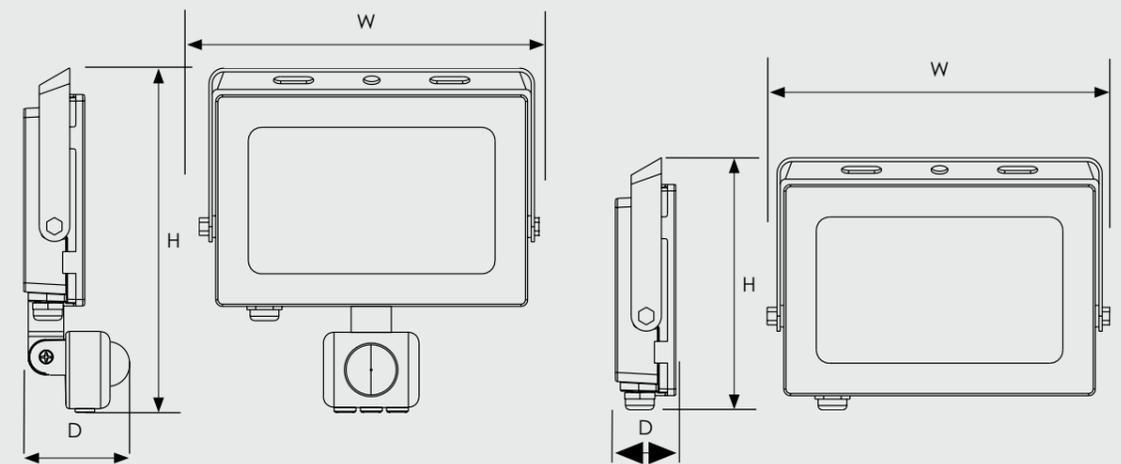

ATLAS MINI SLIM-LINE LED FLOODLIGHT

Available with or without PIR Sensor



Slim-line Design and Fast Install

The Atlas Mini Slim-line Floodlight features a stylish, slim design with an angled mounting bracket designed for fast installation.



PIR Models

The PIR models feature a 120° monitoring angle with lux level controls, sensitivity controls and time controls. Maximum detection range of up to 8m and light hold detection is selectable from 10 seconds to 7 minutes.

Not suitable for dimming.

Slim-line Design

Die-cast aluminium construction with stylish thin body design.

IP65 Rated

The Atlas Mini features an IP65 rating including the PIR sensor making it the perfect choice for outdoor domestic security illumination.

PIR Models

PIR models include controls for sensitivity, time, lux levels and feature an 8-meter detection range with 120° monitoring angle.

Mounting Bracket

Featuring a quick install angled mounting bracket for ease of installation without the need to disassemble the fitting.

PIR Override Function

The Atlas Mini PIR models all feature PIR override. This allows the PIR models to function as standard floodlights if required.

	IK08 RATED
66lm/W EFFICIENCY	Cool White 4000K
IP65 RATED	RA ≥70 CRI RATING

3 YEAR Manufacturers Warranty



Applications

The Slim-line design and variety of wattages available make the Atlas Mini the perfect choice for providing lighting and assisting with security for homes and small business premises.

IP65 Rating

The Atlas Mini Slim-line Floodlight features an IP65 rating offering complete protection against contact dust and water.



Product Code	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Efficiency (lm/W)	Beam Angle	Dimensions (mm)			Order Qty
									W	H	D	
Standard - Single Carton												
12554	10	240	Cool White	4000	660	750	66lm/W	110°	127	102	26	1
12561	20	240	Cool White	4000	1350	1500	68lm/W	110°	159	121	28	1
12578	30	240	Cool White	4000	2090	2200	70lm/W	110°	197	145	29	1
12585	50	240	Cool White	4000	3290	4000	66lm/W	110°	243	178	32	1
PIR - Single Carton												
12592	10	240	Cool White	4000	660	750	66lm/W	110°	127	149	55	1
12608	20	240	Cool White	4000	1350	1500	68lm/W	110°	159	169	55	1
12615	30	240	Cool White	4000	2090	2200	70lm/W	110°	197	191	55	1
12622	50	240	Cool White	4000	3290	4000	66lm/W	110°	243	224	55	1

Includes override function - turn-on/off/on to override PIR.

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com



- 30,000 hour life
- RGB, warm white or cool white colour options
- RGB driver kit includes infrared remote control and receiver with dimming, strobe and flash functions
- Class II
- IP65 rated




FLEXI-STRIP

IP65 rated 5 Metre Flexi-Strip
Available in RGB, cool white & warm white



5M LED FLEXI-STRIP KITS

Available in RGB, Warm White and Cool White

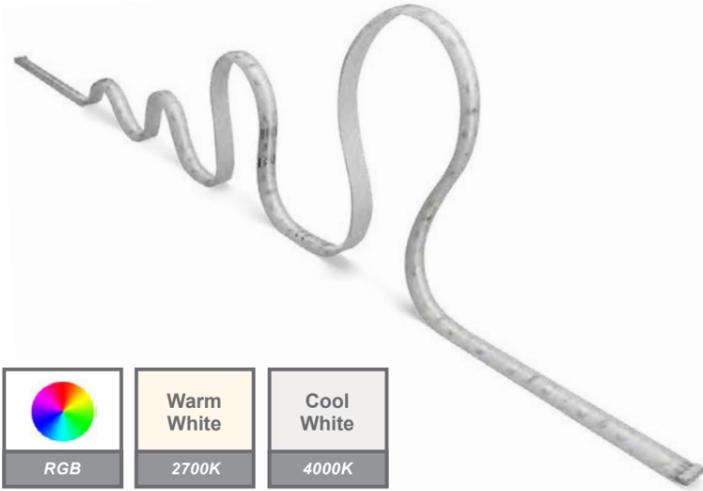

RGB Flexi-Strip



1 x IP65 5M LED Flexi-Strip Light RGB, 1 x IP20 AC power adapter with integrated UK plug, 1 x infrared remote control, 1 x infrared receiver, 2 x 10cm flexible connectors with clamp to both ends and 2 x straight connectors with clamps to both ends.

Warm White Flexi-Strip



1 x IP65 5M LED Flexi-Strip Light WW, 1 x IP20 AC power adapter with integrated UK plug, 2 x 10cm flexible connectors with clamp to both ends and 2 x straight connectors with clamps to both ends.

Cool White Flexi-Strip



1 x IP65 5M LED Flexi-Strip Light CW, 1 x IP20 AC power adapter with integrated UK plug, 2 x 10cm flexible connectors with clamp to both ends and 2 x straight connectors with clamps to both ends.

Remote Control - RGB

The RGB Flexi-Strip Kit includes a remote control receiver for ease of use.

Dimmable - RGB

The RGB Flexi-Strip is dimmable via remote control and includes strobe and flash functions for added lighting effects.

IP65 Rated

The IP65 rating enables all strip kits in the range to be used both indoors or outdoors, adding extra versatility.

3M Backing

Thanks to the quality 3M backing, all strip kits can be attached to almost any surface, both indoors and outdoors.

Adaptable

All Flexi-Strip Lights in the range can be cut at regular intervals making them ideal for custom lighting applications.



3 YEAR Manufacturers Warranty



Applications

Flexi-Strips are ideal for a variety of both domestic and commercial lighting applications that include kitchens, stairs, bars, restaurants, and casinos. The IP65 rating adds further versatility for outdoor applications.



Product Code	Product Description	Watts (W)	Volts (V)	Colour Temp (K)	Total Lumens (lm)	Dimensions (mm)			Order Qty
						W	H	L	
RGB 5 Metre LED Flexi-Strip Light Kit - Blister Pack									
12516	5M LED RGB Flexi-Strip Kit	32	24	RGB		10	3	5000	1
Contents: 1 x IP65 5M LED Flexi-Strip Light RGB, 1 x IP20 AC power adapter with integrated UK plug, 1 x infrared remote control, 1 x infrared receiver, 2 x 10cm flexible connectors with clamp to both ends and 2 x straight connectors with clamps to both ends									
12530	RGB Driver Kit	60	24						1
Larger driver to support combined LED strips up to 10cm in length									
Warm White 5 Metre LED Flexi-Strip Light Kit - Blister Pack									
12493	5M LED Warm White Flexi-Strip Kit	20	24	2700	1800	8	3	5000	1
Contents: 1 x IP65 5M LED Flexi-Strip Light WW, 1 x IP20 AC power adapter with integrated UK plug, 2 x 10cm flexible connectors with clamp to both ends and 2 x straight connectors with clamps to both ends									
12523	WW/CW Driver Kit	48	24						1
Larger driver to support combined LED strips up to 10cm in length									
Cool White 5 Metre LED Flexi-Strip Light Kit - Blister Pack									
12509	5M LED Cool White Flexi-Strip Kit	20	24	4000	1900	8	3	5000	1
Contents: 1 x IP65 5M LED Flexi-Strip Light CW, 1 x IP20 AC power adapter with integrated UK plug, 2 x 10cm flexible connectors with clamp to both ends and 2 x straight connectors with clamps to both ends									
12523	WW/CW Driver Kit	48	24						1
Larger driver to support combined LED strips up to 10cm in length									
Accessories									
12547	Accessory Kit for LED Flexi-Strip (For re-connecting cut-off lengths of 5M Flexi-Strip Light)								1
Contents: 2 x 15cm flexible connector with clamp to both ends (RGB), 2 x 2 straight connectors with clamps to both ends (RGB), 2 x 15cm flexible connector with clamp to both ends (CW/WW), 2 x 2 straight connectors with clamps to both ends (CW/WW)									

1.5mts from plug to connector

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com






TECHNICAL INFORMATION

- Suitable for surface mounting on ceilings or walls
- Maintained or non-maintained functionality
- Manual test function with LED indicator
- 3 years life span with 500 recharge cycles
- 3-hour emergency running time
- 24-hour charge time
- IP20 rated for indoor use
- Features an integrated emergency driver fitted with a LiFePO4 3.2V 600mAh battery
- Base unit comes complete with arrow down legend set
- Up, left and right legend sets available
- Legend sets compliant with ISO3864 - Parts 1&3 with 26m legible viewing distance
- Optional 1.5m suspension kit or recessed kit available*

EMERGENCY BLADE

Krios Emergency Blade
Maintained or Non-maintained Functionality

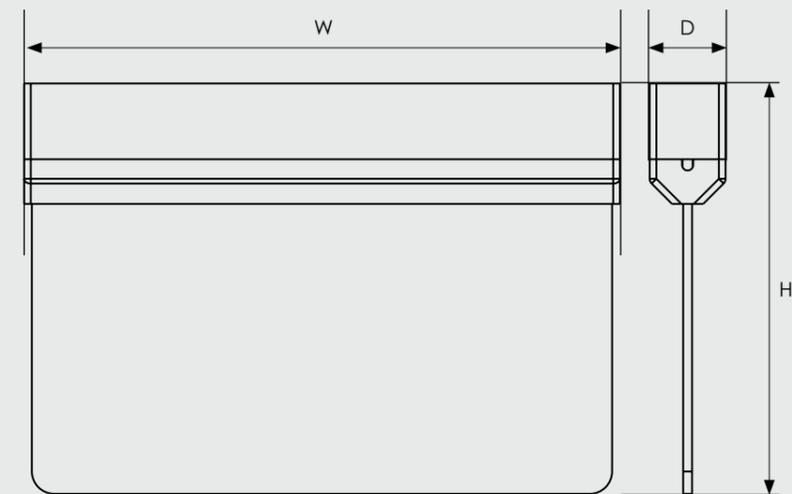

KRIOS EMERGENCY LED BLADE

Both Maintained or Non-maintained Functions



Stylish, Robust and Reliable

With its robust build and 3-year life span, the Krios Emergency Blade combines style with safety and durability.

Mounting Options

The Krios Emergency Blade can be surface mounted to ceilings and walls or it can also be mounted perpendicular to a wall. Suspension and recessed mounting kits are available separately. (14565 - suspension kit adjustable to 1.5m)

Sleek & Stylish

The stylish Krios Emergency Blade is ideal for modern workspaces.

Integrated Driver

The Krios Emergency Blade features a quality emergency driver with a LiFePO4 3.2 600mAh battery and 3-hour emergency run-time.

Maintained or Non-maintained


Having both maintained or non-maintained functions allows the Krios Emergency Blade to either be lit continuously or turn-on in the event of power failure.

ISO3864 Parts 1&3 Compliant Legend Set

The Krios Emergency Blade's ISO compliant Legend Set ensures that the signage has a clear and universal understanding.

Manual Test Function

The manual test function allows users to test the Krios Emergency Blade as and when required, in-line with testing regulations.



Applications

The slim and stylish Krios Emergency Blade is perfectly suited for corridor ceilings and walls in offices, hospitals, hotels, apartments and hospitality applications.



Down ISO Legend Set

Supplied with ISO3864 Parts 1&3 compliant Down Arrow Legend Set.



Up and Left/Right ISO Legend Set

ISO3864 Parts 1&3 Compliant Up and reversible Right/Left Legend Set available separately.



Product Code	Details	Watts (W)	Volts (V)	Dimensions (mm)			Order Qty
				W	H	D	
Single Carton							
14022	LED Emergency Blade	2	240	267	187	34	1
14039	Legend Set - Arrow Up			261	133		1
14046	Legend Set - Arrow Left/Right			261	133		1
14565	Suspension Kit						1
14572	Recessed Kit						1

14565 - suspension kit adjustable to 1.5m

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com






TECHNICAL INFORMATION

- Suitable for surface mounting
- Maintained or non-maintained functionality
- 3 years life span with 500 recharge cycles
- 3-hour emergency running time
- 24-hour charge time
- IP20 rated for indoor use
- Features an integrated emergency driver fitted with a 3.6V 1.8Ah Ni-cd battery

EMERGENCY WALL BOX

Krios Emergency Wall Box
Maintained or Non-maintained Functionality

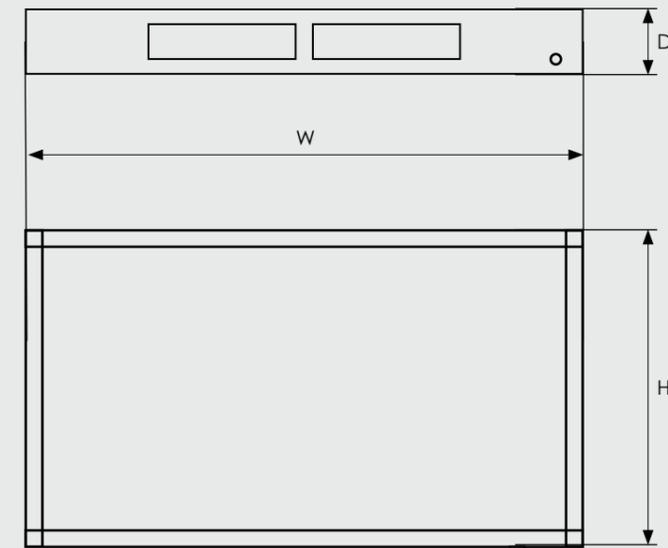

KRIOS EMERGENCY LED WALL BOX

Both Maintained or Non-maintained Functions



Robust and Reliable

The Krios Wall Box features a robust steel construction with tough acrylic front panel making it extremely durable.



Rechargeable Battery

The Krios Emergency Wall Box is fitted with a high quality 3.6V 1.8Ah Ni-cd rechargeable battery.



1 YEAR Emergency Battery Warranty

IP20 Rated

The IP20 rating allows the Krios Emergency Wall Box to be used indoors.

Integrated Driver

The Krios Emergency Wall Box features a quality emergency driver with 1800mAh Ni-cd battery and 3-hour emergency run-time.

Maintained or Non-maintained

Having both maintained or non-maintained functions allows the Krios Emergency Wall Box to either be lit continuously or turn-on in the event of power failure.

EN60598-2-22:2015 Compliant


The Krios Emergency Wall Box complies with EN60589-2-22:2015 for emergency luminaires ensuring the highest safety standards.

26 Metre Visibility

The quality light output emitted ensures a 26-metre visibility range.



3 YEAR Manufacturers Warranty

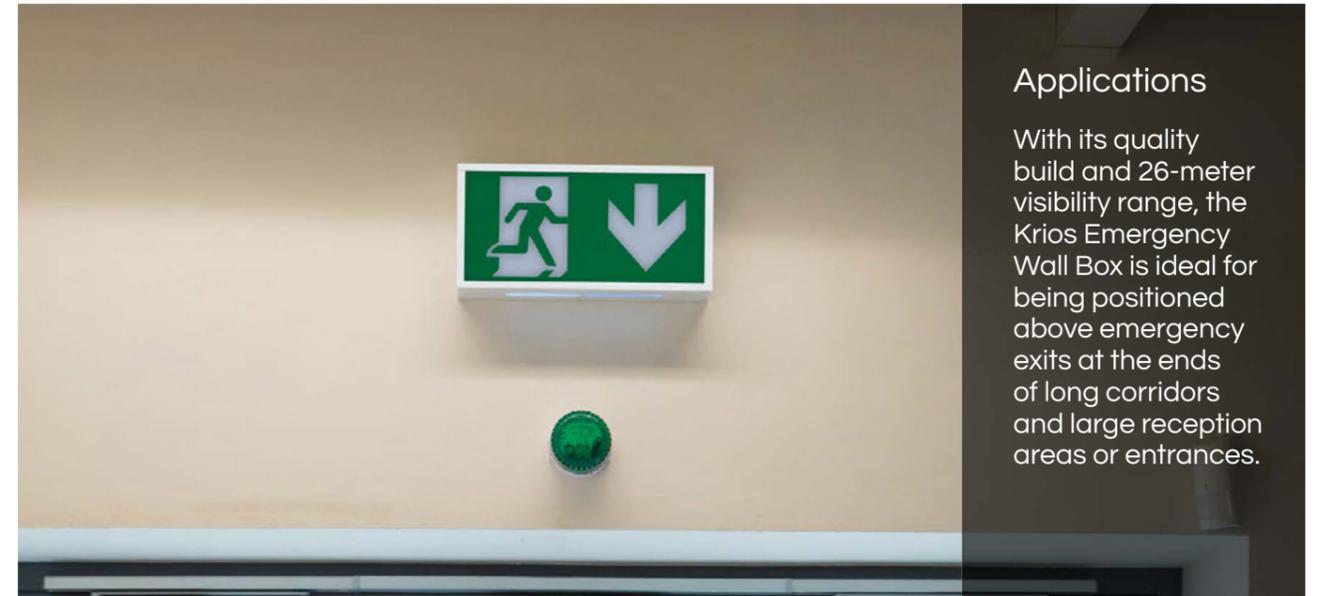


Applications

With its quality build and 26-metre visibility range, the Krios Emergency Wall Box is ideal for being positioned above emergency exits at the ends of long corridors and large reception areas or entrances.

ISO Legend Set

Supplied with Down Arrow Legend Set. Up, Right and Left Legend sets available separately.

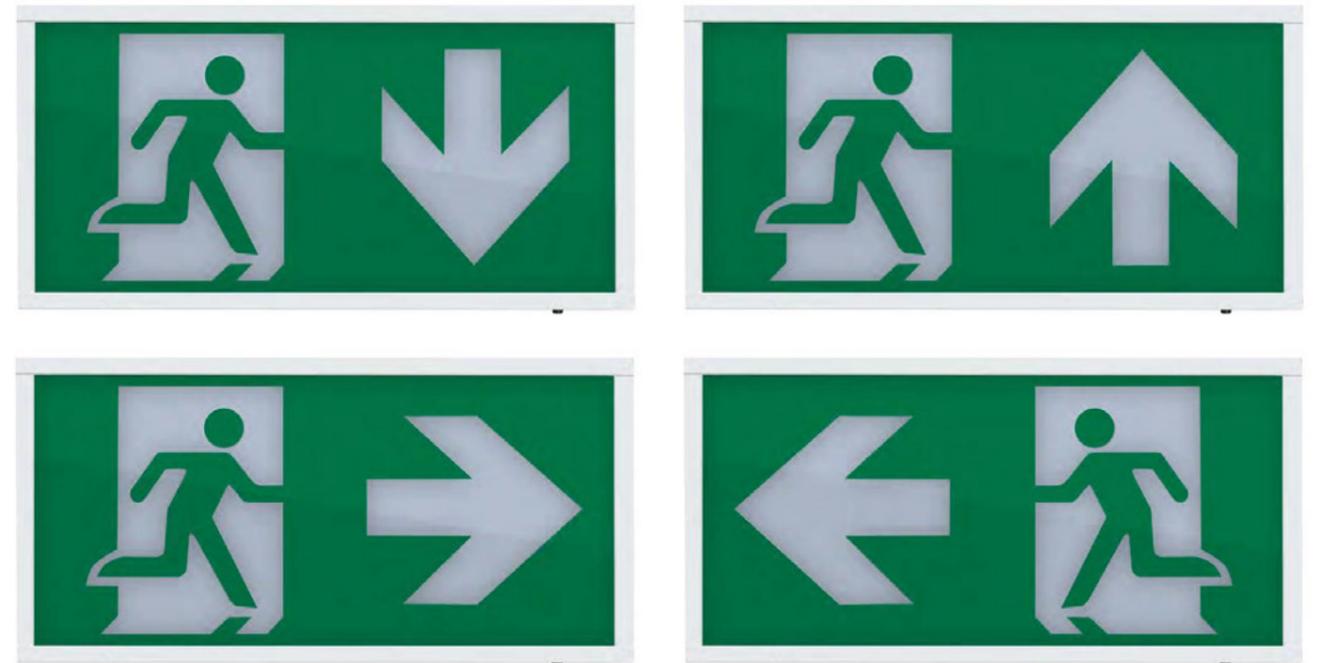

Product Code	Details	Watts (W)	Volts (V)	Dimensions (mm)			Order Qty
				W	D	H	
Single Carton							
14060	LED Emergency Wall Box	1.8	240	390	62	190	1
14077	Legend Set - Arrow Up						1
14084	Legend Set - Arrow Left						1
14091	Legend Set - Arrow Right						1

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com






TECHNICAL INFORMATION

- Suitable for surface mounting
- 4W maintained or 1.1W non-maintained functions
- 3 years life span with 500 recharge cycles
- 3-hour emergency running time
- 24-hour charge time
- IP65 rated for indoor or outdoor use
- Features an integrated emergency driver fitted with a 3.6V 1.0aH Ni-cd battery

EMERGENCY BULKHEAD

Krios Emergency Bulkhead
IP65 Rated with Maintained or Non-maintained Functionality

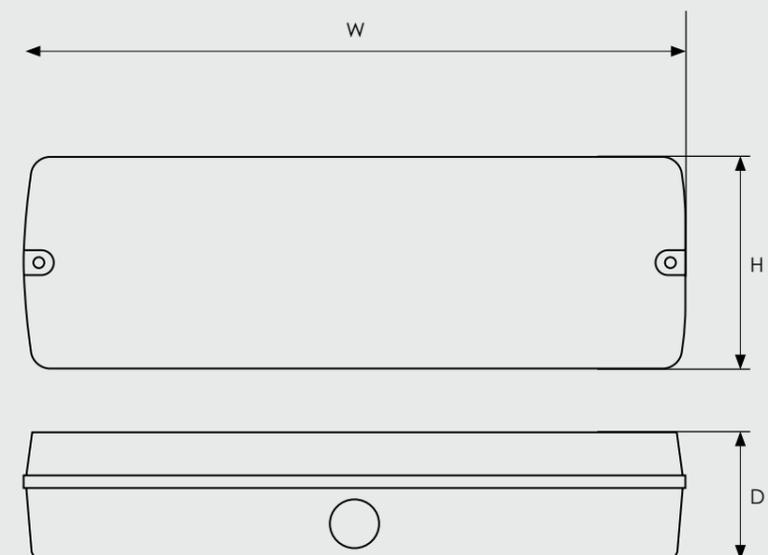

KRIOS EMERGENCY LED BULKHEAD

IP65 Rated with 26 Metre Visibility



1 YEAR Emergency Battery Warranty



IP65
RATED



Indoor or Outdoor

The Krios Emergency Bulkhead offers great versatility due to the IP65 rating that allows it to be used both indoors and outdoors.

26 Metre Visibility

The quality light output emitted ensures a 26-metre visibility range.

Integrated Driver

The Krios Emergency Bulkhead features a quality emergency driver with 3.6V 1.0aH Ni-cd battery and 3-hour emergency run-time.

Maintained or Non-maintained

Having both maintained or non-maintained functions allows the Krios Emergency Bulkhead to either be lit continuously or turn-on in the event of power failure.

EN60598-2-22:2015 Compliant

The Krios Emergency Bulkhead complies with EN60589-2-22:2015 for emergency luminaires ensuring the highest safety standards.

IP65 Rating

The IP65 rating ensures that the Krios Emergency Bulkhead can be utilised both indoors or outdoors without issue.



3 YEAR Manufacturers Warranty



Applications

The IP65 rating makes the Krios Emergency Bulkhead ideally suited for indoor and outdoor applications in offices, hospitals, workspaces and above exterior emergency exit doors.

Robust and Reliable

The Krios Emergency Bulkhead is EN60598-2-22:2015 compliant with a 26-metre visibility range and built from tough polycarbonate making it a safe and reliable choice.



Integrated Driver

Features an integrated emergency driver fitted with a rechargeable emergency battery and is backed by a 3-year lifespan.



ISO Legend Set

Supplied with Down, Up, Left and Right Arrow Legend Set.



Product Code	Details	Watts (W)	Volts (V)	Dimensions (mm)			Order Qty
				W	D	H	
Single Carton							
13971	LED Emergency Bulkhead	4	240	352	67	110	1

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com






TECHNICAL INFORMATION

- Suitable for recessed installation
- Non-maintained functionality
- Manual test function with LED indicator
- Long life maintenance free operation with 50,000 hours
- 3 years life span with 500 recharge cycles
- 3-hour emergency running time
- 24-hour charge time
- IP20 rated for indoor use
- Emergency driver fitted with a LiFePO4 3.2V 1500mAh battery
- Round lens design for use in open areas complete with emergency driver
- Additional corridor lens for narrow areas and walkways (to be used with product code 14008)


EMERGENCY SPOTLIGHT

Krios Emergency Spotlight
For Recessed Installations

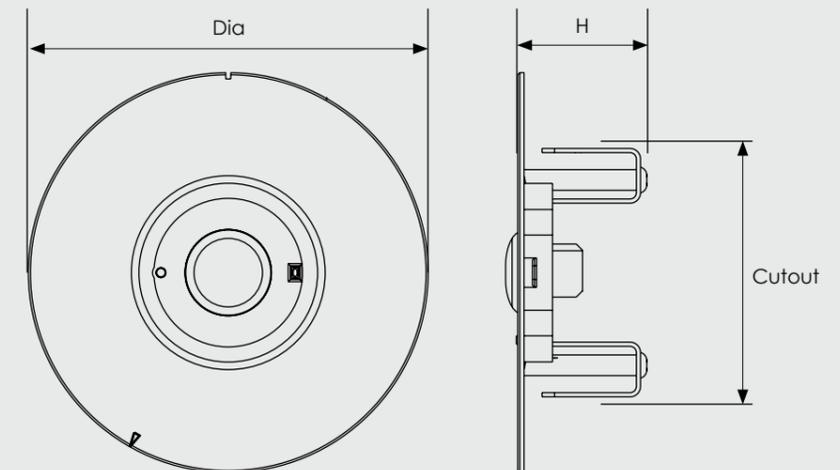

KRIOS EMERGENCY LED SPOTLIGHT

Emergency Spotlight for Recessed Installations

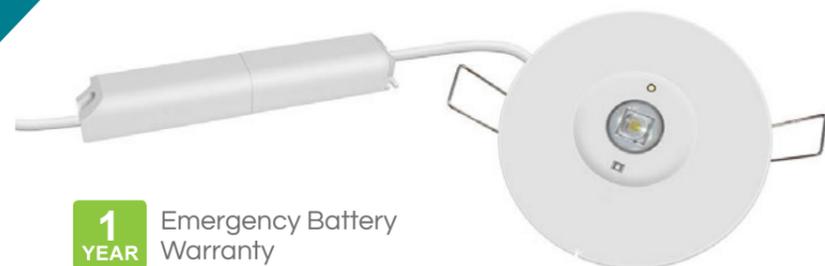

1 YEAR Emergency Battery Warranty

Featuring Integrated Driver

Emergency Spotlight for recessed installations featuring an integrated emergency driver, manual test function with LED indicator and rechargeable emergency battery.



IP20
RATED

Corridor Head (No Driver)

Non-Maintained replacement corridor head with a manual test function and LED indicator to be used with product code 14008. Ideal for narrow areas such as corridors and walkways.

IP20 Rated

The IP20 rating makes the Krios Emergency Spotlight suitable for indoor use.

Emergency Driver

The Krios Emergency Spotlight features a quality emergency driver with a LiFePO4 3.2V 1500mAh rechargeable battery.

Non-maintained

The non-maintained functionality ensures that the Krios Emergency Spotlight turns-on and emits light in the event of a power failure.

EN60598-2-22:2015 Compliant

The Krios Emergency Spotlight complies with EN60598-2-22:2015 for emergency luminaires ensuring the highest possible safety standards.

Manual Test Function

The manual test function allows users to test the Krios Emergency Spotlight as and when required in-line with testing regulations.

Corridor Head

Additional corridor head (No driver) also available separately for narrow areas and walkways. (To be used with product code 14008).



3 YEAR Manufacturers Warranty



Applications

The Krios Emergency Spotlight is the perfect solution when emergency lighting is required for recessed installations in open interior areas. The optional corridor is ideal for recessed installations in narrow walkways.

Round Lens

Position	Height	Distance
	2.8 m	11.2 m
	3 m	11.4 m
	4 m	12.1 m
	5 m	12.3 m
	6 m	11.9 m
	7 m	11 m
	2.8 m	4.5 m
	3 m	4.5 m
	4 m	4.5 m
	5 m	4.2 m
	6 m	3.4 m
	7 m	2.3 m

Dependable and Durable

The Krios Emergency LED Spotlight features a 3-year life span and 50,000 hour long-life maintenance-free operation.

Easy Maintenance

Designed for easy maintenance in recessed installations in open areas.

Corridor Lens

Position Height	Corridor Head	Spotlight	Spotlight	Spotlight	Spotlight
2.8 m	0.9 m	7.1 m	2.2 m	20.8 m	
3 m	0.9 m	7.1 m	2.2 m	21.4 m	
4 m	0.9 m	7.2 m	2.4 m	19.8 m	
5 m	1 m	5.9 m	3 m	20.6 m	

Product Code	Details	Watts (W)	Volts (V)	Dimensions (mm)			Order Qty
				Dia	H	Cutout	
Single Carton							
14008	LED Emergency Spotlight	1	240	95	30	70	1
14015	Corridor Head (No Driver)	1	240	95	30	70	1

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com






TECHNICAL INFORMATION

- 2.3W Non-maintained functionality
- 3 years life span with 500 recharge cycles
- 3-hour emergency running time
- 24-hour charge time
- IP65 rated for indoor or outdoor use
- Features an integrated emergency driver fitted with a 12V 1.5Ah Ni-cd battery

EMERGENCY TWIN SPOT

Krios Emergency Twin Spotlight
IP65 Rated with Twin Light Output

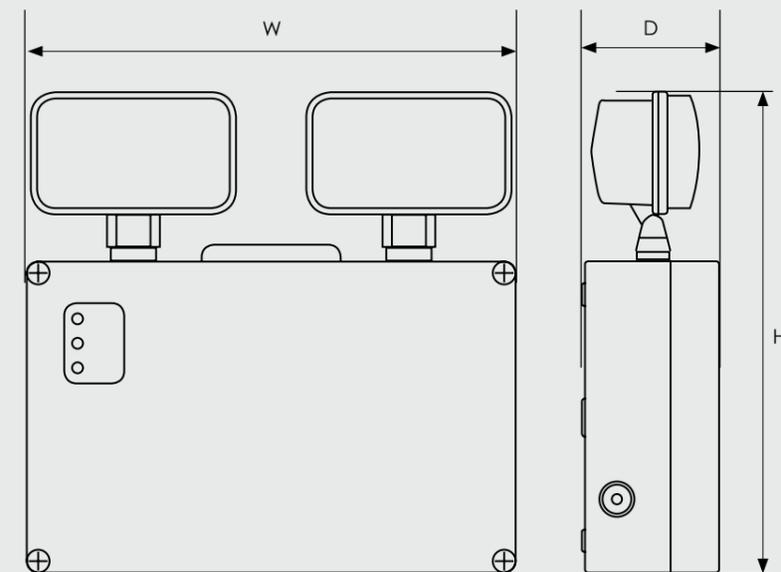

KRIOS EMERGENCY LED TWIN SPOTLIGHT

IP65 Rated with Twin Light Outputs



Twin Adjustable Heads

The adjustable twin spotlights heads can be independently adjusted and moved to emit light in different directions.



IP65 Rated

The IP65 rating makes the Krios Twin Spotlight suitable for use both indoors and outdoors offering added versatility.

1 YEAR Emergency Battery Warranty

26 Metre Visibility

The quality light output emitted ensures a 26-metre visibility range.

Integrated Driver

The Krios Emergency Twin Spotlight features a quality emergency driver with 12V 1.5aH Ni-cd battery and 3-hour emergency run-time.

Non-maintained

The non-maintained functionality ensures that the Twin Spotlight turns-on and emits twin light outputs in the event of a power failure.

EN60598-2-22:2015 Compliant

The Krios Emergency Twin Spotlight complies with EN60589-2-22:2015 for emergency luminaires ensuring the highest safety standards.

IP65 Rating

The IP65 rating ensures that the Krios Emergency Twin Spotlight can be utilised both indoors or outdoors without issue.



3 YEAR Manufacturers Warranty



Applications

The robust construction and IP65 rating make the twin spotlight ideally suited for indoor and outdoor applications where light needs to be emitted in different directions such as interior stair-wells or external walls.

Safe and Dependable

The Krios Emergency Twin Spotlight is EN60598-2-22:2015 compliant with a 26-meter visibility range making it a safe and reliable choice.



Product Code	Details	Watts (W)	Volts (V)	Total Lumens (lm)	Dimensions (mm)			Order Qty
					W	D	H	
Single Carton								
13995	LED Emergency Twin Spotlight	2.3	240	400	300	82	294	1

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com






TECHNICAL INFORMATION

- Connects wirelessly with your home network, no bridge device required
- Home hub compatible
- Smart device compatible, Tuya Smart app required
- Supports 220W max of dimmable LED lamps, or 300W max of traditional lamps
- Not for use with smart/Wi-Fi controlled lamps
- Control dimmable lights on 1 circuit by either touch, Tuya smart app or by voice control via a home hub
- Switch requires an AC neutral In feed from the lighting circuit (see wiring diagram)

INTELLIGENT DIMMER

Intelligent Dimmer Switch
Touch Sensitive Dimmer with Wi-Fi Control

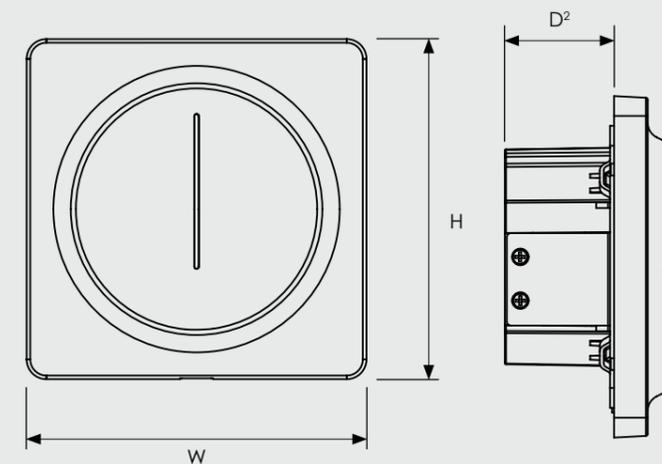

INTELLIGENT DIMMER SWITCH

Touch Sensitive Dimmer with Wifi Control



App Control



Voice Control



Touch Control

The touch-sensitive dimmer provides traditional switch functionality.

Voice Control

Effortlessly use voice control to instruct lights to turn-on/off, dim down, increase brightness via a compatible home hub or the Tuya App.

App Control

Users can quickly and easily control lights by the touch of a screen via the world-leading Tuya Smart App.

LED Wattage

The Phoebe LED Intelligent Touch Dimmer Switch can support up-to 220W maximum of dimmable LED lamps.

Traditional Wattage

A key feature of the Intelligent Dimmer is the ability to turn traditional lamps into wi-fi controllable lamps. (Supports 300W maximum)



2 YEAR Manufacturers Warranty



Applications

Perfect for transforming current lighting circuits into smart controlled lighting with added traditional dimmer functionality the Intelligent Dimmer is ideal for homes, apartments and hospitality projects.

Touch Control



Product Code	Description	Dimensions (mm)				Order Qty
		W	H	D1	D2	
Single Carton						
14671	Intelligent Dimmer Switch	89	86	26	8.7	1

Not suitable for use with Smart Wi-Fi controlled lamps. Requires Tuya App and Wifi 2.4 GHz 802.11b/g/n for set-up.

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com






TECHNICAL INFORMATION

- Connects wirelessly with your home network, no bridge device required
- Home hub compatible
- Smart device compatible, Tuya Smart app required
- Supports 220W max of dimmable LED lamps, or 300W max of traditional lamps
- Not for use with smart/Wi-F controlled lamps
- Controll dimmable lights on 1 circuit by either touch, Tuya smart app or by voice control via a home hub
- Switch requires an AC neutral In feed from the lighting circuit (see wiring diagram)

SMART RELAY SWITCH

Smart Relay Switch
Wi-Fi Control On/Off Relay Switch

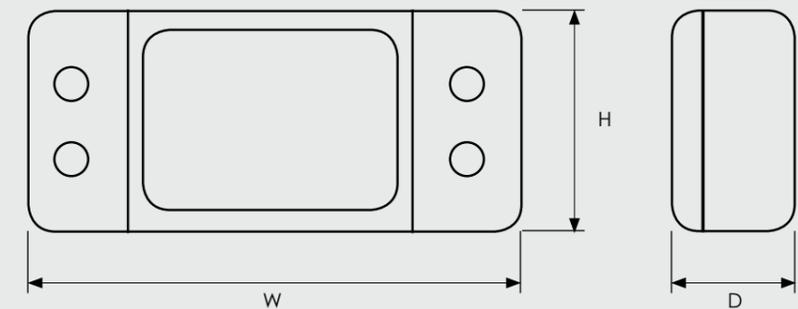

SMART RELAY SWITCH

Wifi Control On/Off Smart Relay Switch



The Phoebe LED Smart Relay Switch converts any existing lighting circuit to Wi-Fi controllable.

Maximum Loads
 Incandescent Lamps = 600W
 Fluorescent Lamps = 400W
 LED Lamps = 400W



On/Off Wi-Fi Control

Convert any existing lighting circuit to Wi-Fi controllable.

Voice Control

Users can turn-on/off lamps with simple voice commands with voice control. Compatible with most smart home hubs.

App Control

Users can quickly and easily turn lights on or off by the touch of a screen via the world-leading Tuya Smart App.

Schedule Lighting

Schedule lights to switch on/off at specific times when you're not home or in the mornings/evenings via the Tuya Smart App.

Complete Control

Wi-Fi Smart Control allows users to control lights remotely whilst on the go from anywhere via their smart device.



2 YEAR Manufacturers Warranty



Applications

Perfect for transforming current lighting circuits into smart controlled lighting the Smart Relay Switch is ideal for homes, apartments and hospitality projects.



App Control

Users can quickly and easily instruct lights to turn-on/off with a touch of a screen via the world-leading Tuya Smart App.



Voice Control

Effortlessly use voice control to instruct lights to turn-on/off via a compatible home hub or the World-leading Tuya App.




Product Code	Description	Dimensions (mm)			Order Qty
		W	H	L	
Single Carton					
14664	Smart Relay Switch	39	24	88	1

Not suitable for use with Smart Wi-Fi controlled lamps.
 Requires Tuya App and Wifi 2.4 GHz 802.11b/g/n for set-up.

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com



NEXT GENERATION SMART LED LIGHTING

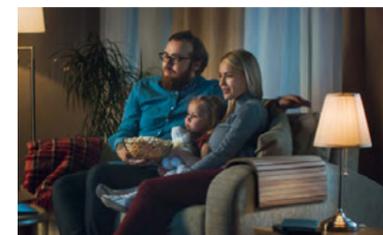



"Turn strip-lights blue"

"Turn-on ceiling lights"

"Change living room lights to pink"

"Turn-on hallway lights warm white"

"Turn-on lamp"



Page 102



Page 105



Page 18



Page 104



Page 103

LED SMART GLS

Smart App and Voice Control LED GLS Lamps



Energy saving LED SMART GLS lamp. Lightweight thermal plastic heat dissipating body and opal lens. Connects to your home network and control via your smart device or home hub.

- Connects wirelessly with your home network, no bridge device required
- Home hub compatible*1
- Smart device compatible, Tuya Smart app required*2
- Closely resembles the look and feel of traditional GLS lamp
- Colour changing RGB with 3000K warm white or standard 3000K warm white options
- 806lm total lumens
- Dimmable*3 - Via App or home hub
- 15,000 hours average rated life
- 10,000 switching cycles
- BC-B22d or ES-E27 caps
- Opal finish
- Instant full light
- Recommended for indoor use

INDOOR USE

HOME HUB


SMART DEVICE

WARM WHITE
2700K

RGB

SMART DIMMABLE

3 YEAR Manufacturers Warranty

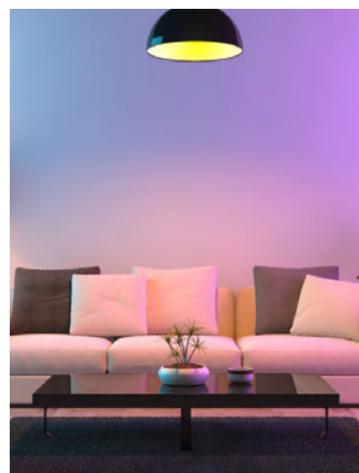

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Single Carton											
12301	8.5	240	BC-B22d	Warm White	3000	806	60	60	107	F	1
12318	8.5	240	ES-E27	Warm White	3000	806	60	60	107	F	1
12325	8.5	240	BC-B22d	RGB + Warm White	RGB + 3000	806	60	60	107	F	1
12332	8.5	240	ES-E27	RGB + Warm White	RGB + 3000	806	60	60	107	F	1


*1 works with most home hubs, requires Tuya protocol see website for details.
 *2 Android or Apple smart device required for setup using the Tuya app.
 *3 Dimmable via App or home hub, not compatible with a physical dimmer switch.
 WiFi 2.4 GHz 802.11b/g/n

Dimmable via voice control or app. Not compatible with a physical dimmer.

Download on the
App Store

GET IT ON
Google Play

Voice Control

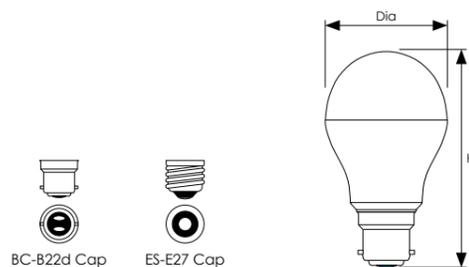

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com



LED SMART CANDLE

Smart App and Voice Control LED Candle Lamps



Energy saving LED SMART candle lamp. Lightweight thermal plastic heat dissipating body and opal lens. Connects to your home network and control via your smart device or home hub.

- Connects wirelessly with your home network, no bridge device required
- Home hub compatible*1
- Smart device compatible, Tuya Smart app required*2
- Closely resembles the look and feel of traditional candle lamp
- Colour changing RGB with 3000K warm white or standard 3000K warm white options
- 470lm total lumens
- Dimmable*3 - Via App or home hub
- 15,000 hours average rated life
- 10,000 switching cycles
- BC-B22d or SES-E14 caps
- Opal finish
- Instant full light
- Recommended for indoor use

INDOOR USE

HOME HUB


SMART DEVICE

WARM WHITE
2700K

RGB

SMART DIMMABLE

3 YEAR Manufacturers Warranty

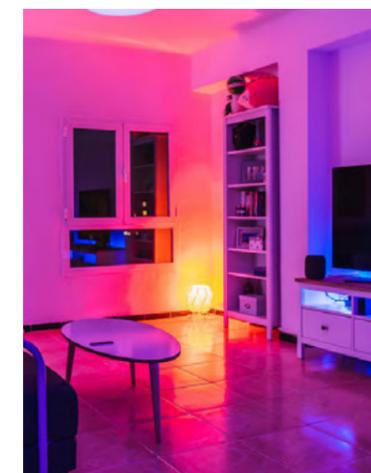

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Single Carton											
12349	5	240	BC-B22d	Warm White	3000	470	40	37	108	F	1
12356	5	240	SES-214	Warm White	3000	470	40	37	108	F	1
12363	5	240	BC-B22d	RGB + Warm White	RGB + 3000	470	40	39	114	F	1
12370	5	240	SES-S14	RGB + Warm White	RGB + 3000	470	40	39	114	F	1


*1 works with most home hubs, requires Tuya protocol see website for details.
 *2 Android or Apple smart device required for setup using the Tuya app.
 *3 Dimmable via App or home hub, not compatible with a physical dimmer switch.
 WiFi 2.4 GHz 802.11b/g/n

Dimmable via voice control or app. Not compatible with a physical dimmer.

Download on the
App Store

GET IT ON
Google Play

Voice Control

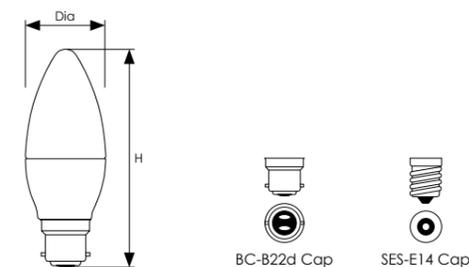

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com



LED SMART GU10

Smart App and Voice Control LED GU10 Lamp



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Halogen Equiv. (W)	Beam Angle	Dimensions (mm)		Energy Rating	Order Qty
										Dia	H		
Single Carton													
12394-V2	5	240	GU10	RGB+ Tuneable White	RGB+ 3000	320	360	50	100°	50	58	G	1


*1 works with most home hubs, requires Tuya protocol see website for details.

*2 Android or Apple smart device required for setup using the Tuya app.

*3 Dimmable via App or home hub, not compatible with a physical dimmer switch.

WiFi 2.4 GHz 802.11b/g/n

Dimmable via voice control or app. Not compatible with a physical dimmer.



GU10 Cap

Energy saving LED SMART GU10 lamp. Lightweight thermal plastic heat dissipating body and opal lens. Connects to your home network and control via your smart device or home hub.

- Connects wirelessly with your home network, no bridge device required
- Home hub compatible*1
- Smart device compatible, Tuya Smart app required*2
- Closely resembles the look and feel of traditional Halogen GU10 lamp
- Colour changing RGB and tuneable white 2700K-4000K options
- 320 useful lumens, 360lm total lumens
- Dimmable*3 - Via App or home hub
- 15,000 hours average rated life
- 10,000 switching cycles
- Opal finish
- Instant full light
- Recommended for indoor use



LED SMART FLEXI-STRIP

Smart App and Voice Control LED 5m Flexi-Strip Kit



Kit contains:
1x 5 meter flexi-strip
2x 15cm connecting leads,
1x power supply with integrated LED and UK plug
1x WiFi controller box



Energy saving LED SMART 5m Flexi-Strip. Connects to your home network and control via your smart device or home hub.

- Connects wirelessly with your home network, no bridge device required
- Home hub compatible*1
- Smart device compatible, Tuya Smart app required*2
- Colour changing RGB with tuneable white 2700K-6500K
- 1500lm total lumens
- Dimmable*3 - Via App or home hub
- Strong 3M backing for easy and sturdy installation
- Cut and re-join at 10cm intervals 2x connecting leads supplied
- 20,000 hours average rated life
- 10,000 switching cycles
- Instant full light
- Recommended for indoor use



Product Code	Watts (W)	Volts (V)	Colour Appearance	Colour Temp. (K)	Total Lumens (lm)	Dimensions (mm)			Order Qty
						L	W	H	
Single Carton									
12417	18	240	RGB+ Tuneable White	RGB+ 2700 - 6500	1500	5000	12	3	1


*1 works with most home hubs, requires Tuya protocol see website for details.

*2 Android or Apple smart device required for setup using the Tuya app.

*3 Dimmable via App or home hub, not compatible with a physical dimmer switch.

WiFi 2.4 GHz 802.11b/g/n

Dimmable via voice control or app. Not compatible with a physical dimmer.

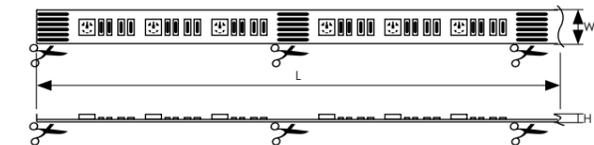

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



LED CLEAR DIMMABLE GLS FILAMENT

Dimmable LED Filament Lamps



Energy saving LED replacement lamp featuring LED filament technology to closely resemble the look and feel of a traditional incandescent lamp.

- 10,000 hour life
- 5,000 switching cycles
- Available in 5W or 7.5W
- 2700K warm white
- Colour rendering index Ra≥80
- BC-B22d or ES-E27 cap
- Clear finish
- Dimmable - compatible with most LED dimmers*
- Recommended for indoor use only

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Clear Dimmable GLS - Single Carton											
4184	5	240	BC-B22d	Warm White	2700	470	40	60	102	F	10
4191	5	240	ES-E27	Warm White	2700	470	40	60	104	F	10
4207	7.5	240	BC-B22d	Warm White	2700	806	60	60	102	F	10
4214	7.5	240	ES-E27	Warm White	2700	806	60	60	104	F	10

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches. Dimmer compatibility: https://www.cromptonlamps.com/files/9639cef9-93cb-4e32-8690-a9f500c9f951/led_filament_gls_dimmable.pdf

10,000
HOUR LIFE



RA ≥80
CRI RATING

WARM WHITE
2700K

INDOOR USE

DIMMABLE

2 YEAR Manufacturers Warranty



LED CLEAR CANDLE/ROUND FILAMENT

Dimmable and Non-Dimmable Filament Lamps



Energy saving LED replacement lamp featuring LED filament technology to closely resemble the look and feel of a traditional incandescent lamp.

- 10,000 hour life
- 5,000 switching cycles
- 2700K warm white
- Colour rendering index Ra≥80
- BC-B22d, ES-E27, SBC-B15d cap and SES-E14 cap
- Clear finish
- Dimmable or non-dimmable options
- Dimmable option compatible with most LED dimmers*
- Recommended for indoor use only

10,000
HOUR LIFE


RA ≥80
CRI RATING

WARM WHITE
2700K

INDOOR USE

DIM/NON-DIM

2 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Clear Non-dimmable Candle - Single Carton											
12769	6.5	240	BC-B22d	Warm White	2700	806	60	35	91	E	10
12776	6.5	240	ES-E27	Warm White	2700	806	60	35	93	E	10
12783	6.5	240	SES-E14	Warm White	2700	806	60	35	97	E	10
Clear Dimmable Candle - Single Carton											
7130	5	240	BC-B22d	Warm White	2700	470	40	35	91	F	10
7147	5	240	SBC-B15d	Warm White	2700	470	40	35	95	F	10
7154	5	240	ES-E27	Warm White	2700	470	40	35	93	F	10
7161	5	240	SES-E14	Warm White	2700	470	40	35	97	F	10
Clear Non-dimmable Round - Single Carton											
12790	6.5	240	BC-B22d	Warm White	2700	806	60	45	80	E	10
12806	6.5	240	ES-E27	Warm White	2700	806	60	45	80	E	10
12813	6.5	240	SES-E14	Warm White	2700	806	60	45	80	E	10
Clear Dimmable Round - Single Carton											
7215	5	240	BC-B22d	Warm White	2700	470	40	45	76	F	10
7222	5	240	SBC-B15d	Warm White	2700	470	40	45	78	F	10
7239	5	240	ES-E27	Warm White	2700	470	40	45	78	F	10
7246	5	240	SES-E14	Warm White	2700	470	40	45	80	F	10

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches. Dimmer compatibility: https://www.cromptonlamps.com/files/08277fe-205f-4fd2-9274-ab100eed28b/led_filament-round_candle_clear.pdf

LED DIMMABLE FILAMENT BENT-TIP CANDLE

Clear Finish Dimmable Filament LED Lamp




Energy saving LED replacement lamp featuring LED filament technology to closely resemble the look and feel of a traditional incandescent lamp.


- 10,000 hour life
- 5,000 switching cycles
- 2 year warranty
- 2700K warm white
- Colour rendering index Ra \geq 80
- BC-B22d, ES-E27 cap SBC-B15d and SES-E14 cap
- Clear finish
- Dimmable - compatible with most LED dimmers*
- Recommended for indoor use only

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Single Carton											
12134	5	240	BC-B22d	Warm White	2700	470	40	35	114	F	1
12141	5	240	SBC-B15d	Warm White	2700	470	40	35	121	F	1
12158	5	240	ES-E27	Warm White	2700	470	60	35	116	F	1
12165	5	240	SES-E14	Warm White	2700	470	60	35	123	F	1

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches.
Dimmer compatibility: https://www.cromptonlamps.com/files/f60622c9-6e78-42b3-aa1d-aafe00de70f3/led_filament_bent-tip-candle.pdf

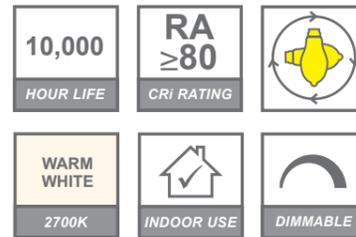

2 YEAR Manufacturers Warranty

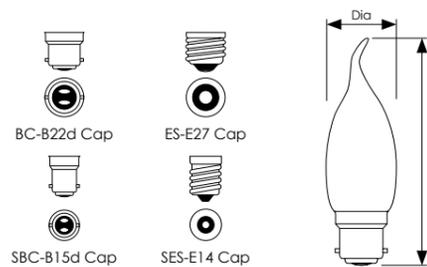


LED PEARL DIMMABLE GLS FILAMENT

Dimmable Filament Lamps



Energy saving LED replacement lamp featuring LED filament technology to closely resemble the look and feel of a traditional pearl incandescent lamp.

- 10,000 hour life
- 5,000 switching cycles
- 2700K warm white
- Colour rendering index Ra \geq 80
- BC-B22d or ES-E27
- Pearl finish
- Dimmable or non-dimmable options
- Dimmable option compatible with most LED dimmers*
- Recommended for indoor use only

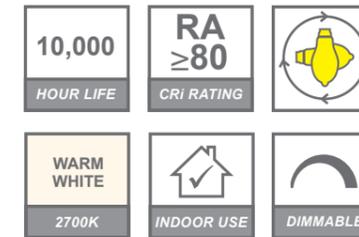


2 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Pearl Dimmable GLS - Single Carton											
5938	5	240	BC-B22d	Warm White	2700	470	40	60	102	F	10
5945	5	240	ES-E27	Warm White	2700	470	40	60	104	F	10
5952	7.5	240	BC-B22d	Warm White	2700	806	60	60	102	F	10
5969	7.5	240	ES-E27	Warm White	2700	806	60	60	104	F	10

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches.
Dimmer compatibility: https://www.cromptonlamps.com/files/f60622c9-6e78-42b3-aa1d-aafe00de70f3/led_filament_bent-tip-candle.pdf

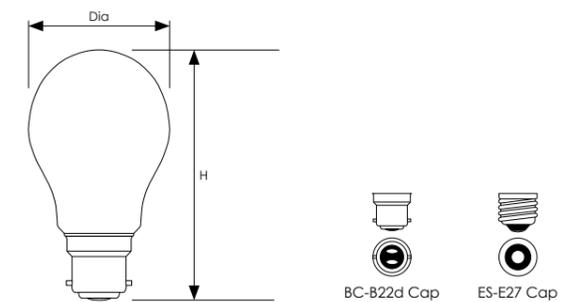

LED PEARL CANDLE/ROUND FILAMENT

Dimmable and Non-Dimmable Filament Lamps




Energy saving LED replacement lamp featuring LED filament technology to closely resemble the look and feel of a traditional pearl incandescent lamp.

- 10,000 hour life
- 5,000 switching cycles
- 2700K warm white
- Colour rendering index Ra \geq 80
- BC-B22d, ES-E27, SBC-B15d cap and SES-E14 cap
- Pearl finish
- Dimmable or non-dimmable options
- Dimmable option compatible with most LED dimmers*
- Recommended for indoor use only

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Pearl Dimmable Candle - Single Carton											
7178	5	240	BC-B22d	Warm White	2700	470	40	35	91	F	10
7185	5	240	SBC-B15d	Warm White	2700	470	40	35	95	F	10
7192	5	240	ES-E27	Warm White	2700	470	40	35	93	F	10
7208	5	240	SES-E14	Warm White	2700	470	40	35	97	F	10
Pearl Dimmable Round - Single Carton											
7253	5	240	BC-B22d	Warm White	2700	470	40	45	76	F	10
7260	5	240	SBC-B15d	Warm White	2700	470	40	45	78	F	10
7277	5	240	ES-E27	Warm White	2700	470	40	45	78	F	10
7284	5	240	SES-E14	Warm White	2700	470	40	45	80	F	10

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches. Dimmer compatibility: https://www.cromptonlamps.com/files/09f8e8e1-87e7-4b09-bdad-afe00df39dd/led_filament_candle-round_pearl.pdf

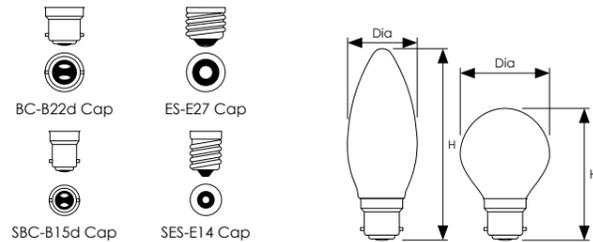

10,000
HOUR LIFE

RA \geq 80
CRI RATING

WARM WHITE
2700K

INDOOR USE

DIM/NON-DIM

2 YEAR Manufacturers Warranty



LED CROWN SILVER GLS FILAMENT

Dimmable Energy Efficient LED Lamp



This lamp is best suited for fittings which are designed to focus light. By reflecting the light backwards, the lamp ensures that all the available light can be focussed.

- 10,000 hour life
- 5,000 switching cycles
- 2700K warm white
- Colour rendering index Ra \geq 80
- ES-E27 cap
- Dimmable - compatible with most LED dimmers*
- Recommended for indoor use only

10,000
HOUR LIFE

RA \geq 80
CRI RATING

WARM WHITE
2700K

INDOOR USE


DIMMABLE

2 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Single Carton											
14114	7	240	ES-E27	Warm White	2700	806	60	60	104	E	10

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches. Dimmer compatibility:

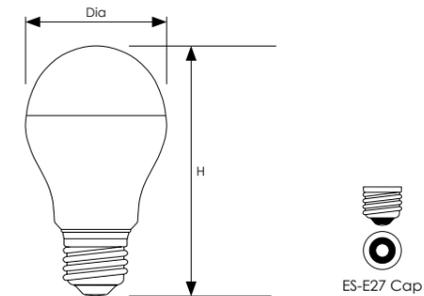

LED DIMMABLE ANTIQUE FILAMENT

Dimmable LED Filament Lamps With Bronze Coloured Glass




Energy saving LED replacement lamp featuring LED filament technology and antique bronzed coloured glass to closely resemble the look and feel of a traditional Antique filament incandescent lamp.

- 10,000 hour life
- 5,000 switching cycles
- Available in 5W or 7.5W (ST64 & G125)
- 2200K extra warm white
- Colour rendering index Ra≥80
- BC-B22d or ES-E27 cap
- Antique bronze finish
- Dimmable - compatible with most LED dimmers*
- Recommended for indoor use only

10,000 HOUR LIFE	RA ≥80 CRI RATING	
EXTRA WARM WHITE 2200K		
	INDOOR USE	DIMMABLE

2 YEAR Manufacturers Warranty

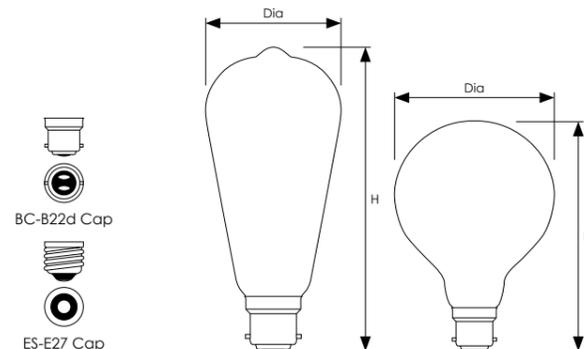

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches.
Dimmer compatibility: https://www.cromptonlamps.com/files/754616ef-b39c-4e5b-940d-a9f500d0d8da/led_filament_st64_antique_bronze.pdf

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



LED DIMMABLE SPIRAL ANTIQUE FILAMENT

Dimmable LED Filament Lamps with Bronze Coloured Glass



Energy saving LED replacement lamp featuring LED filament technology. LED spiral filaments FPC (flexible printed circuit) series filament arrangement, allowing true omni-directional light output. Full antique bronzed coloured glass to closely resemble the look and feel of a traditional Antique spiral filament incandescent lamp.

- 15,000 hour life
- 7,500 switching cycles
- 2200K extra warm white
- Colour rendering index Ra≥80
- BC-B22d, ES-E27 or SES-E14 cap
- Antique bronze finish
- Dimmable - Compatible with most LED dimmers
- Recommended for indoor use only


15,000 HOUR LIFE	RA ≥80 CRI RATING	
EXTRA WARM WHITE 2200K		
	INDOOR USE	DIMMABLE

3 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
ST64 - Single Carton											
G80 - Single Carton											
Candle - Single Carton											
6607	6	240	ES-E27	Extra Warm White	2200	250	25	64	140	G	1
6614	6	240	BC-B22d	Extra Warm White	2200	250	25	80	120	G	1
6621	6	240	ES-E27	Extra Warm White	2200	250	25	80	122	G	1
10642	2.5W	240	SES-E14	Extra Warm White	2200	200	20	35	97	G	1

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches.
Dimmer compatibility: https://www.cromptonlamps.com/files/83d47bc1-8c47-4622-9590-a9f500d13aaa/led_filament_st64_spiral_antique_bronze.pdf

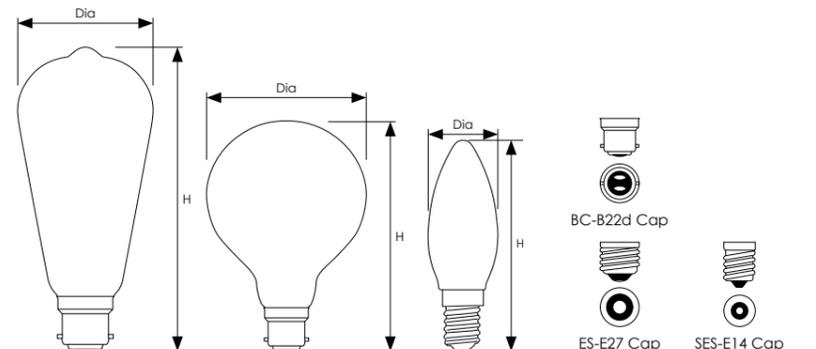

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com




LED THERMAL PLASTIC GLS

Non-dimmable Energy Efficient LED Lamps




LED GLS replacement lamp. Lightweight thermal plastic heat dissipating body and opal lens. True retrofit replacements for incandescent lamps.

- 15,000 hour life
- 30,000 switching cycles
- Exact equivalent brightness for regular 40W, 60W, 75W or 100W incandescent GLS lamps
- 2700K warm white, 4000K cool white or 6500K daylight colour options
- Colour rendering index Ra \geq 80
- BC-B22d or ES-E27 cap
- Opal finish
- Not suitable for dimming
- Recommended for indoor use only

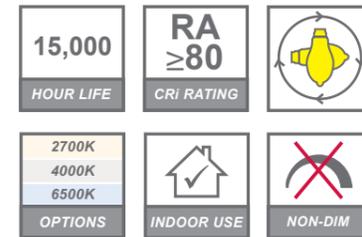

2 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
40W Equivalent - Single Carton											
11694	5.5	240	BC-B22d	Warm White	2700	470	40	60	112	F	10
11700	5.5	240	ES-E27	Warm White	2700	470	40	60	112	F	10
60W Equivalent - Single Carton											
11717	8.5	240	BC-B22d	Warm White	2700	806	60	60	112	F	10
11724	8.5	240	ES-E27	Warm White	2700	806	60	60	112	F	10
11731	8.5	240	BC-B22d	Cool White	4000	806	60	60	112	F	10
11748	8.5	240	ES-E27	Cool White	4000	806	60	60	112	F	10
75W Equivalent - Single Carton											
11755	11	240	BC-B22d	Warm White	2700	1055	75	60	120	F	10
11762	11	240	ES-E27	Warm White	2700	1055	75	60	120	F	10
11779	11	240	BC-B22d	Cool White	4000	1055	75	60	120	F	10
11786	11	240	ES-E27	Cool White	4000	1055	75	60	120	F	10
11793	11	240	BC-B22d	Daylight	6500	1055	75	60	120	F	10
11809	11	240	ES-E27	Daylight	6500	1055	75	60	120	F	10
100W Equivalent - Single Carton											
11878	15	240	BC-B22d	Warm White	2700	1521	100	65	120	F	10
11885	15	240	ES-E27	Warm White	2700	1521	100	65	120	F	10


LED THERMAL PLASTIC DIMMABLE GLS

Dimmable Energy Efficient LED Lamps




LED GLS dimmable replacement lamp. Lightweight thermal plastic heat dissipating body and opal lens. Fully dimmable. True retrofit replacements for 75W & 100W incandescent lamp.

- 15,000 hour life
- 30,000 switching cycles
- Exact equivalent for 75W/100W incandescent GLS lamp
- 2700K warm white or 4000K cool white or 6500K daylight colour options
- Colour rendering index Ra \geq 80
- BC-B22d or ES-E27 cap
- Opal finish
- Dimmable - compatible with most LED dimmers*
- Recommended for indoor use only

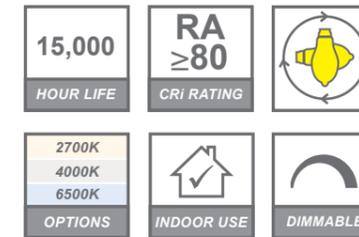

2 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
75W Equivalent - Single Carton											
11816	11	240	BC-B22d	Warm White	2700	1055	75	60	120	F	10
11823	11	240	ES-E27	Warm White	2700	1055	75	60	120	F	10
11830	11	240	BC-B22d	Cool White	4000	1055	75	65	120	F	10
11847	11	240	ES-E27	Cool White	4000	1055	75	65	120	F	10
11854	11	240	BC-B22d	Daylight	6500	1055	75	65	120	F	10
11861	11	240	ES-E27	Daylight	6500	1055	75	65	120	F	10
100W Equivalent - Single Carton											
11892	14	240	BC-B22d	Warm White	2700	1521	100	65	120	F	10
11908	14	240	ES-E27	Warm White	2700	1521	100	70	128	F	10

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches. Dimmer compatibility: https://www.cromptonlamps.com/files/669820d8-148d-4d52-84fa-caf0010236a6/led_thermal_plastic_gls_dimmable.pdf

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com




LED THERMAL PLASTIC CANDLE

Non-dimmable Energy Efficient LED Lamps




LED candle replacement lamp. Lightweight thermal plastic heat dissipating body and opal lens. True retrofit replacement for incandescent lamps.

- 15,000 hour life
- 15,000 switching cycles
- Exact equivalent brightness for regular 40W incandescent candle lamps
- 2700K warm white, 4000K cool white or 6500K daylight colour options
- Colour rendering index Ra \geq 80
- BC-B22d, SBC-B15d, ES-E27 or SES-E14 caps
- Opal finish
- Not suitable for dimming
- Recommended for indoor use only

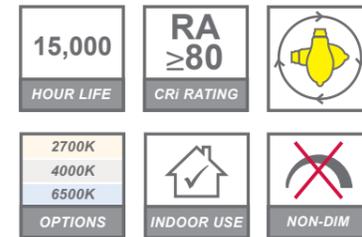

2 YEAR Manufacturers Warranty

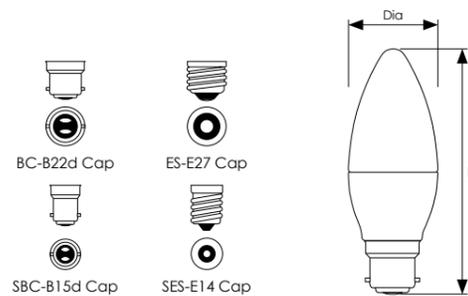

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Single Carton											
11298	5.5	240	BC-B22d	Warm White	2700	470	40	37	95	F	10
11304	5.5	240	SBC-B15d	Warm White	2700	470	40	37	98	F	10
11311	5.5	240	ES-E27	Warm White	2700	470	40	37	96	F	10
11328	5.5	240	SES-E14	Warm White	2700	470	40	37	100	F	10
11335	5.5	240	BC-B22d	Cool White	4000	470	40	37	95	F	10
11342	5.5	240	ES-E27	Cool White	4000	470	40	37	96	F	10
11359	5.5	240	SES-E14	Cool White	4000	470	40	37	100	F	10
11366	5.5	240	BC-B22d	Daylight	6500	470	40	37	95	F	10
11373	5.5	240	ES-E27	Daylight	6500	470	40	37	96	F	10
11380	5.5	240	SES-E14	Daylight	6500	470	40	37	100	F	10


LED THERMAL PLASTIC DIMMABLE CANDLE

Dimmable Energy Efficient LED Lamps



LED candle dimmable replacement lamp. Lightweight thermal plastic heat dissipating body and opal lens. True retrofit replacement for incandescent lamps.

- 15,000 hour life
- 15,000 switching cycles
- Exact equivalent brightness for regular 40W incandescent candle lamps
- 2700K warm white, 4000K cool white or 6500K daylight colour options
- Colour rendering index Ra \geq 80
- BC-B22d, SBC-B15d, ES-E27 or SES-E14 caps
- Opal finish
- Dimmable - compatible with most LED dimmers*
- Recommended for indoor use only

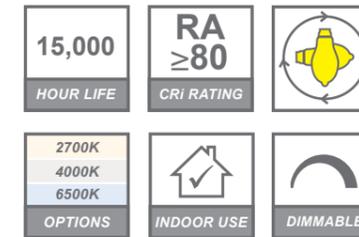


2 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Single Carton											
13476	5	240	BC-B22d	Warm White	2700	470	40	35	103	F	10
14558	5	240	SBC-B15d	Warm White	2700	470	40	35	103	F	10
13483	5	240	ES-E27	Warm White	2700	470	40	35	103	F	10
13490	5	240	SES-E14	Warm White	2700	470	40	35	103	F	10
13506	5	240	BC-B22d	Cool White	4000	470	40	35	103	F	10
13513	5	240	ES-E27	Cool White	4000	470	40	35	103	F	10
13520	5	240	SES-E14	Cool White	4000	470	40	35	103	F	10
13537	5	240	BC-B22d	Daylight	6500	470	40	35	103	F	10
13544	5	240	ES-E27	Daylight	6500	470	40	35	103	F	10
13551	5	240	SES-E14	Daylight	6500	470	40	35	103	F	10

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches. Dimmer compatibility: https://www.cromptonlamps.com/files/2f3956c7-594f-456b-b722-ace50f00ba5/led_thermal_plastic_candle_dimmable%202021.pdf

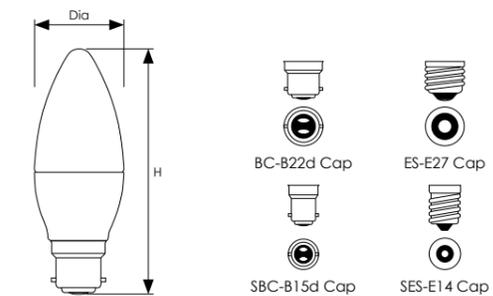


LED THERMAL PLASTIC ROUND

Non-dimmable Energy Efficient LED Lamps




LED round replacement lamp. Lightweight thermal plastic heat dissipating body and opal lens. True retrofit replacement for incandescent lamps.

- 15,000 hour life
- 15,000 switching cycles
- Exact equivalent brightness for regular 40W incandescent candle lamps
- 2700K warm white, 4000K cool white or 6500K daylight colour options
- Colour rendering index Ra \geq 80
- BC-B22d, SBC-B15d, ES-E27 or SES-E14 caps
- Opal finish
- Not suitable for dimming
- Recommended for indoor use only

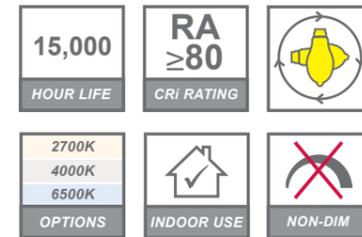

2 YEAR Manufacturers Warranty

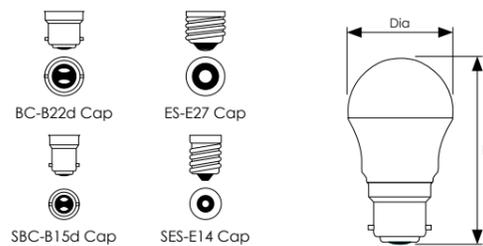

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Single Carton											
11496	5.5	240	BC-B22d	Warm White	2700	470	40	45	82	F	10
11502	5.5	240	SBC-B15d	Warm White	2700	470	40	45	82	F	10
11519	5.5	240	ES-E27	Warm White	2700	470	40	45	83	F	10
11526	5.5	240	SES-E14	Warm White	2700	470	40	45	83	F	10
11533	5.5	240	BC-B22d	Cool White	4000	470	40	45	82	F	10
11540	5.5	240	ES-E27	Cool White	4000	470	40	45	83	F	10
11557	5.5	240	SES-E14	Cool White	4000	470	40	45	83	F	10
11564	5.5	240	BC-B22d	Daylight	6500	470	40	45	82	F	10
11571	5.5	240	ES-E27	Daylight	6500	470	40	45	83	F	10
11588	5.5	240	SES-E14	Daylight	6500	470	40	45	83	F	10


LED THERMAL PLASTIC DIMMABLE ROUND

Dimmable Energy Efficient LED Lamps



LED round dimmable replacement lamp. Lightweight thermal plastic heat dissipating body and opal lens. True retrofit replacement for incandescent lamps.

- 15,000 hour life
- 15,000 switching cycles
- Exact equivalent brightness for regular 40W incandescent candle lamps
- 2700K warm white, 4000K cool white or 6500K daylight colour options
- Colour rendering index Ra \geq 80
- BC-B22d, ES-E27 or SES-E14 caps
- Opal finish
- Dimmable - compatible with most LED dimmers*
- Recommended for indoor use only

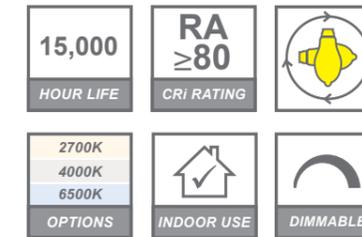


2 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Single Carton											
13568	5	240	BC-B22d	Warm White	2700	470	40	45	77	F	10
13575	5	240	ES-E27	Warm White	2700	470	40	45	77	F	10
15382	5	240	SES-E14	Warm White	2700	470	40	45	82	F	10
13599	5	240	BC-B22d	Cool White	4000	470	40	45	77	F	10
13605	5	240	ES-E27	Cool White	4000	470	40	45	77	F	10
13612	5	240	SES-E14	Cool White	4000	470	40	45	82	F	10
13629	5	240	BC-B22d	Daylight	6500	470	40	45	77	F	10
13636	5	240	ES-E27	Daylight	6500	470	40	45	77	F	10
13643	5	240	SES-E14	Daylight	6500	470	40	45	89	F	10

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches. Dimmer compatibility: https://www.cromptonlamps.com/files/a59970d5-ab3b-4168-a8c1-ace500f01f6/led_thermal_plastic_round_dimmable%202021.pdf

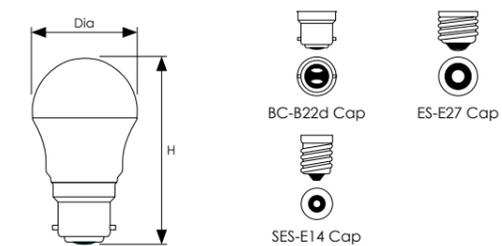


LED THERMAL PLASTIC REFLECTOR

Energy Efficient Reflector LED Lamps




LED reflector replacement lamps shaped and sized similar to R39, R50, R63 or R80 reflector lamps. Lightweight thermal plastic heat dissipating body and opal lens. True retrofit replacement for incandescent lamps.

- Equivalent brightness for regular incandescent reflector lamps
- 20,000 hour life
- 10,000 switching cycles
- 2700K warm white
- Colour rendering index Ra \geq 80
- SES-E14 or ES-E27 cap
- Opal finish
- Not suitable for dimming
- Recommended for indoor use only

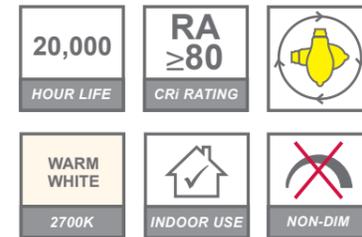

2 YEAR Manufacturers Warranty

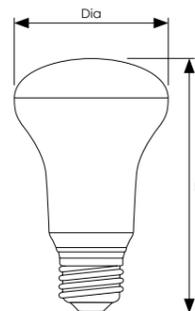


LED THERMAL PLASTIC 110V GLS

Special Purpose LED Lamps




LED 110V special purpose GLS replacement lamp for use in industrial applications. Lightweight thermal plastic heat dissipating body and opal lens. True retrofit replacement for incandescent lamps.

- 20,000 hour life
- 10,000 switching cycles
- Exact equivalent brightness for regular 60W incandescent GLS lamps
- 2700K warm white or 4000K cool white
- Colour rendering index Ra \geq 80
- BC-B22d or ES-E27 cap
- Opal finish with site safe yellow body
- Not suitable for dimming
- Recommended for indoor use only

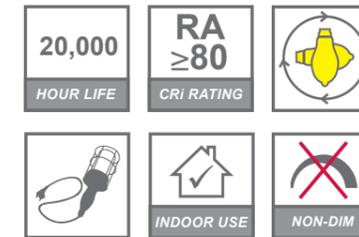

2 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Single Carton											
11915	9	110	BC-B22d	Warm White	2700	806	60	60	112	G	1
11922	9	110	ES-E27	Warm White	2700	806	60	60	112	G	1
12042	9	110	BC-B22d	Cool White	4000	806	60	60	112	G	1

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com




New Energy Label Information

Since 1st September 2021, the energy labels that tell us how energy-efficient a light bulb is have started to transition into a new system, which will be fully in place by 1st March 2023.

The alterations were triggered by the new EU 2019/2020 Single Lighting Regulation (SLR) and the new EU 2019/2015 Energy Label Regulation (ELR) – with the purpose of the changes designed to protect the environment further, boost consumer protection and improve the sustainability of products.

The new regulations have been incorporated into UK law under The Ecodesign for Energy-Related Products and Energy Information (Lighting Products) Regulations 2021 2021 No. 1095.

Based on the energy efficiency achieved, each light source will be given a new classification and a new label between A and G. In addition to this, some products will not be permitted to be placed on the market in the EU. Please note that existing stock with the old label may still be sold until 1 March 2023.

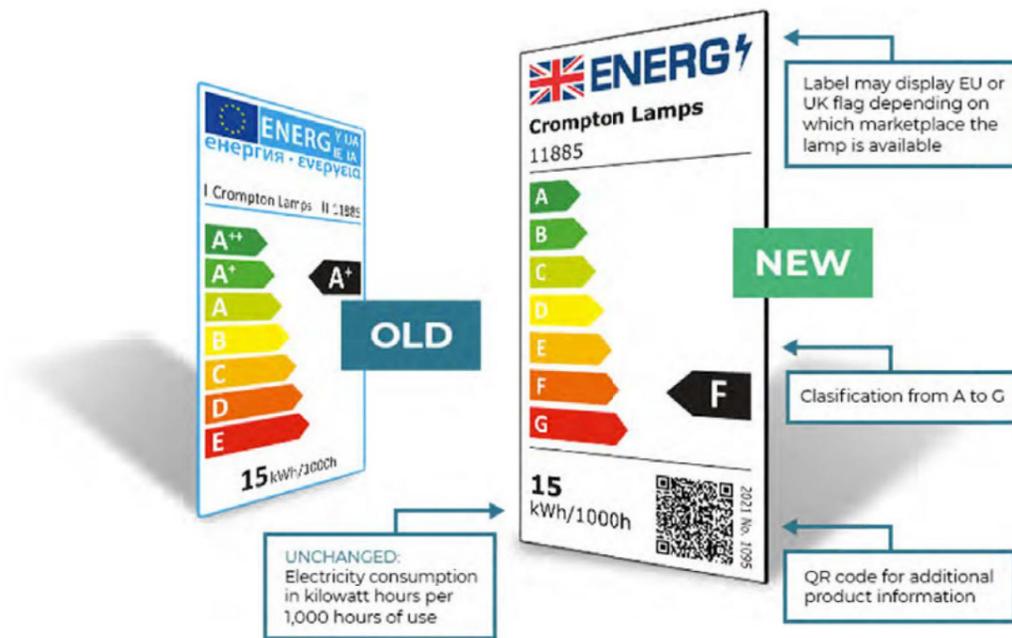

New LED light bulbs are becoming more and more energy-efficient, and almost all new products are labelled in the top categories (A++, A+, A). Rather than adding more plusses to the A class, the new energy labels are being "rescaled", to a simple A to G scale.

It is worth noting, that although the energy efficiency rating may have changed (for example A+ to F), the energy efficiency of the product has not changed, only the letter to which it is designated.

This new, simpler system will not only make it easier to know which light bulbs are the most energy-efficient, but it will also allow more room for innovation. That's because the current most efficient light bulbs will now be rated as an F or a G in the new rankings, meaning manufacturers have more opportunity to build even more efficient light bulbs in the future.

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com



LED THERMAL PLASTIC SMD GU10

Energy Saving LED GU10 Lamp

Energy efficient LED GU10 lamp with thermal plastic heat dissipating body. Suitable for fire rated downlights.

- 15,000 hour life
- 30,000 switching cycles
- 3000K warm white or 4000K cool white colour options
- Colour rendering index Ra≥80
- GU10 cap
- Suitable for fire rated downlights
- Not suitable for dimming
- Recommended for indoor use only



15,000 HOUR LIFE

RA ≥80 CRI RATING


INDOOR USE

NON-DIM

1 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Halogen Equiv. (W)	Beam Angle	Dimensions (mm)		Energy Rating	Order Qty
										Dia	H		
Single Carton													
11229	5	240	GU10	Warm White	3000	330	380	50	38°	50	53	G	10
11236	5	240	GU10	Cool White	4000	340	390	50	38°	50	53	G	10

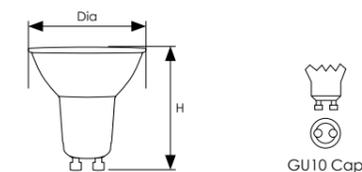

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com




LED GLASS SMD GU10 LAMP

Available in Dimmable and Non-dimmable




Energy efficient LED GU10 lamp with glass body. Suitable for fire rated downlights.

- 15,000 hour life
- 10,000 switching cycles
- 2700K warm white or 4000K cool white colour options
- Colour rendering index Ra \geq 80
- GU10 cap
- Suitable for fire rated downlights
- Dimmable or non-dimmable options
- Dimmable option compatible with most LED dimmers*
- Recommended for indoor use only

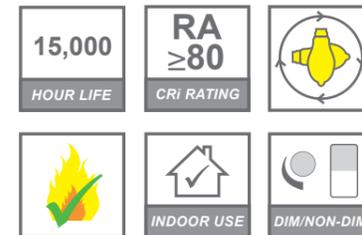

3 YEAR Manufacturers Warranty



GU10 Cap

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Halogen Equiv. (W)	Beam Angle	Dimensions (mm)		Energy Rating	Order Qty
										Dia	H		
Dimmable - Single Carton													
6102	5	240	GU10	Warm White	2700	360	390	50	35°	50	56	G	10
6119	5	240	GU10	Cool White	4000	390	420	50	35°	50	56	F	10
Non-dimmable - Single Carton													
4870	4.5	240	GU10	Warm White	2700	340	380	50	35°	50	53	F	10
4887	4.5	240	GU10	Cool White	4000	360	400	50	35°	50	53	F	10

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches. Dimmer compatibility: https://www.cromptonlamps.com/files/1b2bca10-211f-429f-b139-a8a500d1913e/led_gu10_glass_smd-specification-sheet.pdf

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



LED 5W COB GU10 LAMP

Available in Dimmable and Non-dimmable




LED retrofit lamp shaped and sized similar to a GU10 halogen lamp featuring the latest LED COB technology. Extremely low power consumption at 90lm/W.

- 30,000 hour life
- 15,000 switching cycles
- 3000K warm white, 4000K cool white or 6000K daylight colour options
- Colour rendering index Ra \geq 80
- GU10 cap
- Suitable for fire rated downlights
- Dimmable or non-dimmable options
- Dimmable option compatible with most LED dimmers*
- Recommended for indoor use only



4 YEAR Manufacturers Warranty

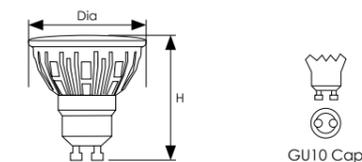

GU10 Cap

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Hal Equiv. (W)	Beam Angle	Dimensions (mm)		Energy Rating	Order Qty
										Dia	H		
Dimmable - Single Carton													
LGU105WWCOB-DIM	5	240	GU10	Warm White	3000	450	520	50+	45°	50	55.5	F	10
LGU105CWCOB-DIM	5	240	GU10	Cool White	4000	450	520	50+	45°	50	55.5	F	10
LGU105DLWCOB-DIM	5	240	GU10	Daylight	6000	450	520	50+	45°	50	55.5	F	10
Non-dimmable - Single Carton													
LGU105WWCOB	5	240	GU10	Warm White	3000	450	520	50+	45°	50	55.5	F	10
LGU105CWCOB	5	240	GU10	Cool White	4000	450	520	50+	45°	50	55.5	F	10
LGU105DLWCOB	5	240	GU10	Daylight	6000	450	520	50+	45°	50	55.5	F	10

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches. Dimmer compatibility: https://www.cromptonlamps.com/files/db795049-f975-417f-be97-aa3a00a2f33e/led_gu10_5w_cob.pdf

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



LED GLASS SMD DIMMABLE GU10 LAMP

5.5W Sunset Dim LED GU10



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Halogen Equiv. (W)	Beam Angle	Dimensions (mm)		Energy Rating	Order Qty
										Dia	H		
Single Carton													
9738	5.5	240	GU10	Warm White/ Extra Warm White	3000/2200	360	390	50	50°	50	54	G	1


* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches.
Dimmer compatibility: https://www.cromptonlamps.com/files/6186406b-7496-4284-a6d2-a9f500cd964/led_gu10_glass_smd_sun-set_dim.pdf

LED retrofit GU10 sunset dimmable lamp, emits a warmer light when dimmed from 3000K to 2200K, simulating the characteristics of a traditional halogen lamp.

- 25,000 hour life
- 50,000 switching cycles
- Features Sunset Dim technology; as the lamp is dimmed the colour temperature becomes warmer to recreate the cosy feeling of a traditional halogen lamp
- 3000K warm white at full power; 2200K extra warm white when dimmed to 10%
- Dimmable - compatible with most LED dimmers
- Suitable for fire rated downlights
- Ideal for bars, hotels and restaurants to create ambience and mood lighting
- Recommended for indoor use only
- Instant full light



3 YEAR Manufacturers Warranty

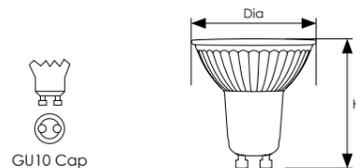

GU10 Cap


LED SMD LONG BARREL GU10 LAMP

LED Retrofit GU10 Lamp



LED retrofit lamp featuring a long barrelled body which is designed to fit extra-deep L1/GU10 fittings. Features the latest low energy LED SMD technology.

- 25,000 hour life
- 12,500 switching cycles
- 2700K warm white or 4000K cool white colour options
- Colour rendering index Ra≥80
- GU10 cap with hole - compatible with all long barrel GU10 fittings including L1 low energy and TP24 fittings
- Dimmable option compatible with most LED dimmers*
- Suitable for fire rated downlights
- Recommended for indoor use only

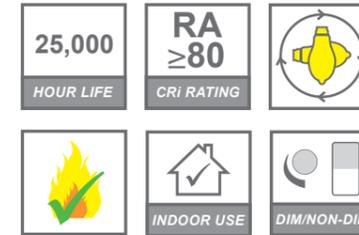


2 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Halogen Equiv. (W)	Beam Angle	Dimensions (mm)		Energy Rating	Order Qty
										Dia	H		
Non-dimmable - Single Carton													
13452	4.9	240	L1/GU10	Warm White	2700	255	330	50	100°	50	74	G	1
13469	4.9	240	L1/GU10	Cool White	4000	280	350	50	100°	50	74	G	1
Dimmable - Single Carton													
14893	4.9	240	L1/GU10	Warm White	2700	285	340	50	100°	50	74	G	1
14909	4.9	240	L1/GU10	Cool White	4000	305	370	50	100°	50	74	G	1

* Dimmable models compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches.

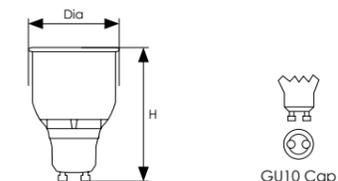

GU10 Cap

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



LED GLASS SMD 12V MR16 LAMP

5W Retrofit MR16 LED Lamp




Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Halogen Equiv. (W)	Beam Angle	Dimensions (mm)		Energy Rating	Order Qty
										Dia	H		
Single Carton													
14855	5	12	GU5.3	Warm White	2700	350	380	40	36°	50	45	F	10
14862	5	12	GU5.3	Cool White	4000	395	320	40	36°	50	45	F	10


* Crompton 12V LED Glass MR16 lamps will operate with most AC or DC 12V drivers. Crompton Lamps can supply a suitable LED driver (Part number: LEDDRIVER20W) which is guaranteed to drive 4x 5W LED Glass MR16. Contact Crompton Lamps for more information or for prices of our LED Driver.

LED retrofit MR16 lamp* featuring a full glass body to mimic the exact shape and size of a halogen MR16 lamp but featuring the latest low energy LED SMD technology.

- 20,000 hour life
- 10,000 switching cycles
- 2700K warm white or 4000K cool white colour options
- Colour rendering index Ra≥80
- GU5.3 cap
- Suitable for fire rated downlights
- Not suitable for dimming
- Recommended for indoor use only

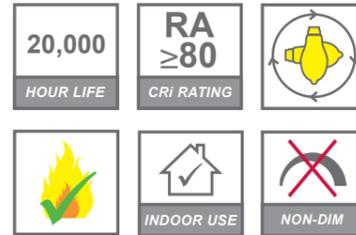

3 YEAR Manufacturers Warranty



GU5.3 Cap

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com




LED SMD 12V MR11 LAMP

High Powered Retrofit MR11 LED Lamp




High powered LED retrofit MR11 lamp* with extremely low power consumption and a lamp life of 25,000 hours.

- 25,000 hour life
- 12,500 switching cycles
- 2700K warm white or 4000K cool white colour options
- Colour rendering index Ra≥80
- GU4 cap
- Not suitable for dimming
- Recommended for indoor use only

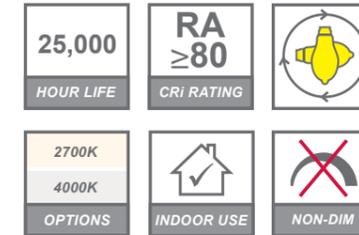

4 YEAR Manufacturers Warranty

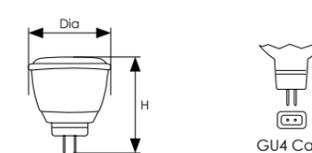

GU4 Cap

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



LED T8 FULL GLASS TUBE

With LED Starter for Direct Retrofit Into Existing Single Battens





LED T8 full glass tube with internal diffused coating providing 320° light output. Energy saving with low power consumption. Includes LED starter for direct retrofit into existing single battens.*

- 40,000 hour life, 15,000 switching cycles
- 3000K warm white, 4000K cool white or 6500K daylight colour options
- Colour rendering index Ra \geq 80
- Standard 2ft, 3ft, 4ft, 5ft or 6ft T8 lengths
- Ambient operating temperature -20°C to 50°C
- No mercury, no warping, no bending
- No discolouration of light over life of tube
- Not suitable for dimming
- Not suitable for emergency circuits
- Recommended for indoor use only
- Supplied in a rigid 2mm cardboard tube to minimise transportation damage

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Beam Angle	Dimensions (mm)			Energy Rating	Order Qty
								Dia	L1	L2		
Single Carton												
LFT29WW	9	165-240	G13	Warm White	3000	800	320°	26	602	588	F	1
LFT29CW	9	165-240	G13	Cool White	4000	810	320°	26	602	588	F	1
LFT29DL	9	165-240	G13	Daylight	6500	900	320°	26	602	588	F	1
LFT314WW	14	165-240	G13	Warm White	3000	1100	320°	26	906	894	F	1
LFT314CW	14	165-240	G13	Cool White	4000	1200	320°	26	906	894	F	1
LFT314DL	14	165-240	G13	Daylight	6500	1300	320°	26	906	894	F	1
LFT422WW	22	165-240	G13	Warm White	3000	1950	320°	26	1212	1198	F	1
LFT422CW	22	165-240	G13	Cool White	4000	2050	320°	26	1212	1198	F	1
LFT422DL	22	165-240	G13	Daylight	6500	2150	320°	26	1212	1198	F	1
LFT524WW	24	165-240	G13	Warm White	3000	2300	320°	26	1513	1500	F	1
LFT524CW	24	165-240	G13	Cool White	4000	2500	320°	26	1513	1500	F	1
LFT524DL	24	165-240	G13	Daylight	6500	2550	320°	26	1513	1500	F	1
LFT628CW	28	165-240	G13	Cool White	4000	2900	320°	28	1780	1763	F	1
LFT628DL	28	165-240	G13	Daylight	6500	3000	320°	28	1780	1763	F	1

* See website for fitting instructions. Crompton Lamps recommends wiring directly to mains for optimum efficiency.
* 6ft LED T8 Tubes have a 25,000 hour life cycle, 12,500 switching cycles & 4 year warranty.

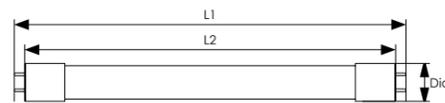

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



LED T8 FULL GLASS FOODSAFE TUBE

With Foodsafe Shatterproof Coating



We now provide a range of full glass tube coatings for fragment retention. Our foodsafe coating, which is IEC 61549 compliant and can also be used for long life lamps is recognisable by a green band.

Crompton shatterproof tubes are full glass tubes coated in a special material with the sole purpose of fragment retention. A glass tube breakage can put a costly stop to production, as well as obvious health risks that glass fragments can create.

A common misconception is that the glass tube itself is shatterproof, when in fact it is the sleeve acting as an aid to glass retention. The material is either extruded or heat shrunk to a lamp, acting as a glass collector should the lamp itself shatter.





5 YEAR Manufacturers Warranty
2ft, 3ft, 4ft & 5ft T8 tubes

4 YEAR Manufacturers Warranty
6ft T8 tubes



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Beam Angle	Dimensions (mm)			Energy Rating	Order Qty
								Dia	L1	L2		
Single Carton												
LFT29WW-SF	9	165-240	G13	Warm White	3000	800	320°	26	602	588	F	36
LFT29CW-SF	9	165-240	G13	Cool White	4000	810	320°	26	602	588	G	36
LFT29DL-SF	9	165-240	G13	Daylight	6500	900	320°	26	602	588	F	36
LFT314WW-SF	14	165-240	G13	Warm White	3000	1100	320°	26	906	894	F	36
LFT314CW-SF	14	165-240	G13	Cool White	4000	1200	320°	26	906	894	F	36
LFT314DL-SF	14	165-240	G13	Daylight	6500	1300	320°	26	906	894	F	36
LFT422WW-SF	22	165-240	G13	Warm White	3000	1950	320°	26	1212	1198	F	36
LFT422CW-SF	22	165-240	G13	Cool White	4000	2050	320°	26	1212	1198	F	36
LFT422DL-SF	22	165-240	G13	Daylight	6500	2150	320°	26	1212	1198	F	36
LFT524WW-SF	24	165-240	G13	Warm White	3000	2300	320°	26	1513	1500	F	36
LFT524CW-SF	24	165-240	G13	Cool White	4000	2500	320°	26	1513	1500	F	36
LFT524DL-SF	24	165-240	G13	Daylight	6500	2550	320°	26	1513	1500	F	36
LFT628CW-SF	28	165-240	G13	Cool White	4000	2900	320°	28	1780	1763	F	36
LFT628DL-SF	28	165-240	G13	Daylight	6500	3000	320°	28	1780	1763	F	36

* See website for fitting instructions. Crompton Lamps recommends wiring directly to mains for optimum efficiency.
* 6ft LED T8 Tubes have a 25,000 hour life cycle, 12,500 switching cycles & 4 year warranty.
N.B. Item is non-returnable

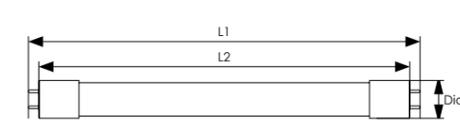

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com




LED T5 FULL GLASS TUBE

Direct Retrofit Into Existing Luminaires




LED T5 full glass tube with external diffused sleeve providing 270° light output. Energy saving with low power consumption. Direct retrofit into existing luminaires with no rewiring required*. Instant full light.

- 40,000 hour life, 15,000 switching cycles
- 3000K Warm White or 4000K cool white
- Standard 2ft, 3ft, 4ft or 5ft T5 lengths
- Colour rendering index Ra≥82
- Ambient operating temperature -20°C to 50°C
- No mercury or hazardous materials
- No warping, no bending
- No discolouration of light over life of tube
- Not suitable for dimming
- Not suitable for high-output fixtures
- Not suitable for emergency circuits
- Recommended for indoor use only
- Supplied in a rigid 2mm cardboard tube to minimise transportation damage

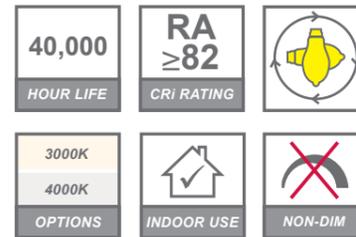

5 YEAR Manufacturers Warranty

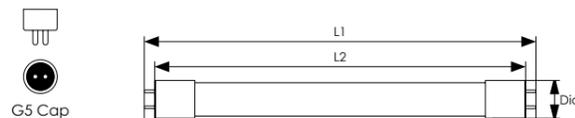

Product Code	Watts (W)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Beam Angle	Compatible Ballast** (W)	Dimensions (mm)			Energy Rating	Order Qty
								Dia	L1	L2		
Single Carton												
9752	8	G5	Warm White	3000	760	270°	14	16	563	549	F	1
5570	8	G5	Cool White	4000	780	270°	14	16	563	549	F	1
9769	12	G5	Warm White	3000	1100	270°	21	16	863	849	G	1
5587	12	G5	Cool White	4000	1100	270°	21	16	863	849	G	1
9783	20	G5	Warm White	3000	2300	270°	35	16	1463	1449	F	1

*See website for fitting instructions.

** See website for list of compatible electronic ballasts. The performance of this lamp is determined by the fitting to which it is installed.

N.B. Item is non-returnable.

Crompton Lamps LED T5 Full Glass Tube cannot be wired direct, lamp design requires ballast to operate

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com




LED T5 DIRECT TO MAINS TUBE

Direct To Mains For Maximum Efficiency



LED T5 full glass tube with external diffused sleeve providing 270° light output. Energy saving with low power consumption. Direct to mains for maximum efficiency no ballast required*. Instant full light.

- 40,000 hour life
- 15,000 switching cycles
- 4000K cool white
- Available in 2ft, 3ft, 4ft or 5ft T5 lengths
- Colour rendering index Ra≥80
- Ambient operating temperature -20°C to 50°C
- No mercury no warping, no bending
- No discolouration of light over life of tube
- Not suitable for dimming
- Not suitable for emergency circuits
- Recommended for indoor use only
- Supplied in a rigid 2mm cardboard tube to minimise transportation damage

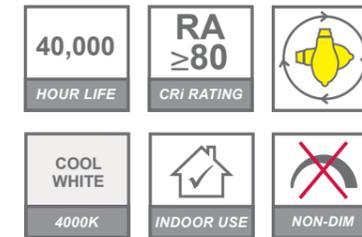


5 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Beam Angle	Dimensions (mm)			Energy Rating	Order Qty
								Dia	L1	L2		
Single Carton												
12080	8	240	G5	Cool White	4000	780	270°	16	563	549	E	1
12097	12	240	G5	Cool White	4000	1100	270°	16	863	849	E	1
12066	16	240	G5	Cool White	4000	1580	270°	16	1163	1149	E	1
12073	20	240	G5	Cool White	4000	2400	270°	16	1463	1449	E	1

* Direct to mains only. Do not run with a ballast, re-wiring by a qualified person may be required, see website for instructions.



Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com




LED PLL DIRECT TO MAINS

Direct to Mains For Maximum Efficiency






Energy saving LED PLL Direct to mains for maximum efficiency no ballast required* - ideal for multiple commercial applications. Featuring a full glass body with same dimensions as CFL PLL. No mercury or hazardous materials. Instant full light, with no warm-up time.

- 40,000 hour life
- 15,000 switching cycles
- 4000K cool white
- 280° beam angle
- Colour rendering index Ra≥80
- 2G11 cap
- Opal white finish
- Not suitable for dimming
- Not suitable for emergency circuits
- Recommended for indoor use only

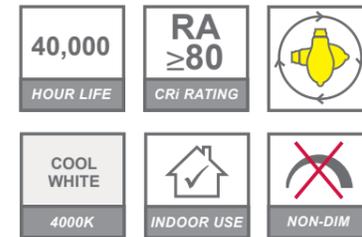

4 YEAR Manufacturers Warranty

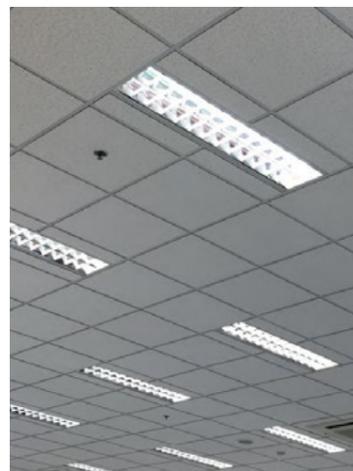

Product Code	Watts (W)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	CFL Equivalent (W)	Dimensions (mm)			Energy Rating	Order Qty
							Dia	H	L		
Single Carton											
12059	25	2G11	Cool White	4000	2700	55	43	24	541	F	1

*Direct to mains only. Do not run with a ballast, re-wiring by a qualified person may be required, see website for instructions.

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com




LED DOUBLE ENDED TUBULAR

Energy Saving Retrofit LED DET Lamps





LED double ended tubular lamps for use in shaver lamps, picture lights and concealed lighting. Energy saving with low power consumption.

- 15,000 hour life
- 10,000 switching cycles
- 2700K warm white or 4000K cool white colour options
- Colour rendering index Ra≥80
- Opal finish
- Instant full light
- Standard 221mm or 284mm lengths
- Not suitable for dimming
- Recommended for indoor use only

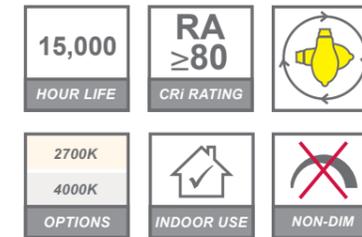

4 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	L1		
Single Carton											
5624	3.5	240	SCC-S15	Warm White	2700	300	30	26	221	F	1
8854	3.5	240	SCC-S15	Cool White	4000	410	35	26	221	E	1
5631	6	240	SCC-S15	Warm White	2700	500	40	26	284	F	1
8861	6	240	SCC-S15	Cool White	4000	650	50	26	284	E	1

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



LED DIMMABLE AR111


Includes LED Driver



Product Code	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Approx. Halogen Equiv.(W)	Beam Angle	Dimensions (mm)		Energy Rating	Order Qty
									Dia	H		
Single Carton												
3002	10	240	Warm White	2700	930	1025	75	30°	110	43	F	1
3026	14	240	Warm White	2700	830	1400	100	30°	110	43	F	1

* For energy consumption, add 10% to rated power to calculate rated power correction for external LED driver.

** Lamp must be used in conjunction with included LED driver. LED driver 240V input voltage.*** Lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches
Dimmer compatibility: https://www.cromptonlamps.com/files/04ca0313-3714-4861-8541-a9f500bb62be/led_ar111.pdf

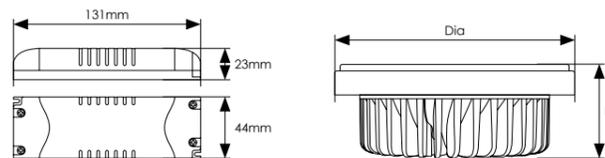

LED dimmable AR111 complete with LED driver. Energy saving with low power consumption. Typical uses include bars, restaurants, retail display and hotels.

- 35,000 hour life
- 17,500 switching cycles
- LED COB technology
- 2700K warm white or 4000K cool white colour options
- Colour rendering index Ra \geq 80
- Includes constant current LED driver**
- Dimmable - compatible with most LED dimmers***
- For use in display lighting
- Recommended for indoor use only



5 YEAR Manufacturers Warranty




LED R7s

Energy Saving LED Linear Retrofit Lamp

Energy efficient LED linear retrofit lamp - an ideal replacement for halogen 78mm or 118mm linear lamps. Widely used in internal fittings such as mother & child floor lamps, up-lighters and ceiling lights.


- 20,000 hour life
- 50,000 switching cycles
- 6W/610lm/ \approx 50W equivalent
- 9W/790lm/ \approx 70W equivalent
- 3000K warm white colour temperature
- Colour rendering index Ra \geq 82
- R7s cap
- Not suitable for dimming
- Instant full light

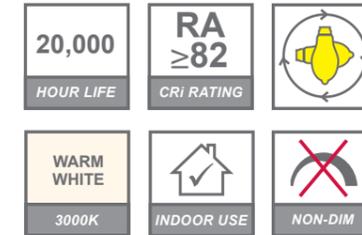

3 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Single Carton											
10994	6	240	R7s	Warm White	3000	610	50	20	78	F	1
11014	9	240	R7s	Warm White	3000	790	70	20	118	F	1

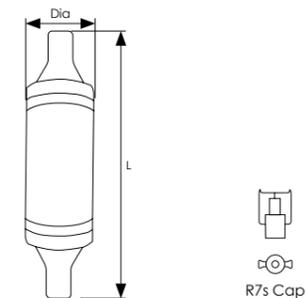

Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



Tel: 01274 657 088
Email: sales@cromptonlamps.com
Web: www.cromptonlamps.com



LED GX53


Energy Saving Retrofit LED GX53 Lamp



Energy saving LED GX53 retrofit lamp with extremely low power consumption. Opal finish. Not suitable for dimming.

- 25,000 hour life
- 12,500 switching cycles
- 2700K warm white or 4000K cool white colour options
- Colour rendering index Ra \geq 80
- Opal Finish
- For use in downlights and under kitchen cabinets, ideal for use in pantries and cloak-rooms
- Unique design produces all over illumination with no spotting
- Not suitable for dimming
- Recommended for indoor use only

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	CFL Equiv. (W)	Beam Angle	Dimensions (mm)		Energy Rating	Order Qty
										Dia	H		
Single Carton													
12684	5	240	GX53	Warm White	2700	400	510	11	110°	75	25	F	1
12691	5	240	GX53	Cool White	4000	420	530	11	110°	75	25	F	1

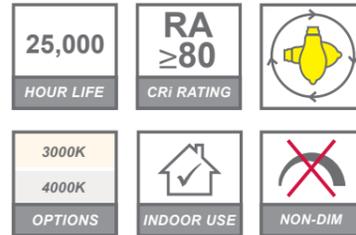

4 YEAR Manufacturers Warranty




LED G9/G4

LED G4 Silicon & LED G9 Capsule

High efficiency LED G4* Silicon and G9 capsule lamps for display and accent light fixtures.

- 25,000 hour life, 15,000 switching cycles
- 2700K warm white or 4000K cool white
- Colour rendering index Ra \geq 80
- G9 Lightweight plastic opaque casing
- G9 Not suitable for enclosed fittings or with insufficient means of heat dissipation
- Not suitable for dimming
- Recommended for indoor use only

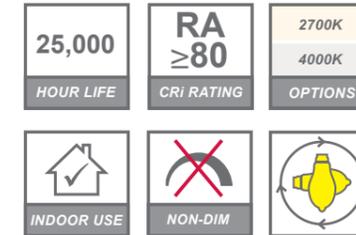


2 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Energy Saving Halogen Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Single Carton - 12V G4*											
14756	2	12	G4	Warm White	2700	190	10	10	37	F	10
14763	2	12	G4	Cool White	4000	200	10	10	37	F	10
Single Carton - 240V G9											
3415	2.5	240	G9	Warm White	2700	210	18	16.5	49	G	10
3422	2.5	240	G9	Cool White	4000	210	18	26.5	49	G	10

* Crompton 12V LED G4 lamps will operate with most 12V drivers Crompton Lamps can supply a suitable LED driver (Part number: LEDDRIVER20W) which is guaranteed to drive 10x 2W LED G4. Contact Crompton Lamps for more information or for prices of our LED Driver.

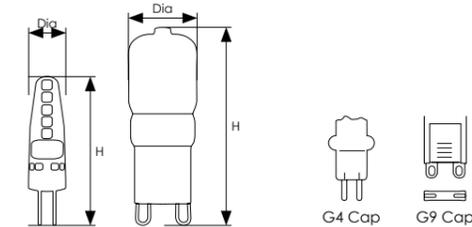

LED APPLIANCE

LED Miniatures Filament Cooker Hood and Pygmy/Fridge/Sign



Special purpose LED retrofit miniature lamps with extremely low power consumption.

LED Filament Cooker Hood

- 10,000 hour life, 50,000 switching cycles
- 2700K warm white or 4000K cool white colour options
- Colour rendering index Ra≥80
- Not suitable for dimming
- Recommended for indoor use only

LED Pygmy/Sign/Fridge

- 25,000 hour life, 50,000 switching cycles
- 2700K white
- Colour rendering index Ra≥80
- Can be used outdoors in a suitable IP65 rated socket
- Ambient operating temperature of -20°C to 30°C
- Not suitable for dimming

Cooker Hood




Pygmy



2 YEAR Manufacturers Warranty Cooker Hood

4 YEAR Manufacturers Warranty Pygmy/Fridge/Sign

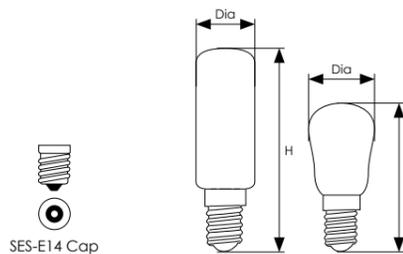

SES-E14 Cap

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Single Carton - Cooker Hood											
12837	4.7	240	SES-E14	Warm White	2700	440	40	26	90	F	10
12844	4.7	240	SES-E14	Cool White	4000	440	40	26	90	F	10
Single Carton - Pygmy/Sign/Fridge											
12820	2.7	240	SES-E14	White	2700	280	27	26	62	F	10

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com



LED PAR

LED PAR30 and PAR38 Dimmable Lamps

LED PAR (Pressed Aluminium Reflector) lamps feature a glass enclosure and highly reflective aluminium coating applied internally.

- 25,000 hour life
- 12,500 switching cycles
- ES-E27 cap
- Colour rendering index Ra≥80
- Prismatic lens
- Dimmable - Compatible with most LED dimmers*
- Can be used outdoors when fitted in a suitable IP65 rated fitting



25,000
HOUR LIFE

WARM WHITE
3000K

RA ≥80
CRI RATING


DIMMABLE

4 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Hologen Equiv. (W)	Beam Angle	Dimensions (mm)		Energy Rating	Order Qty
										Dia	H		
Single Carton - PAR30 Dimmable*													
14879	9.5	240	ES-E27	Warm White	3000	850	900	100	30°	95	92	F	1
Single Carton - PAR38 Dimmable*													
14886	15.5	240	ES-E27	Warm White	3000	1300	1500	120	30°	130	120	F	1

*The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches
 Dimmer compatibility: https://www.cromptonlamps.com/files/08454ec3-585c-45b6-a7ac-aeb300b4bab9/led_par38_dimmable.pdf

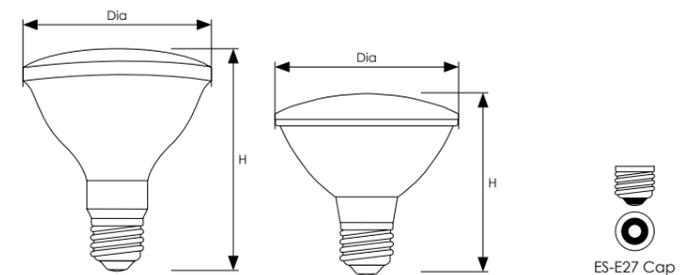

ES-E27 Cap

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com




LED COLOUR FILAMENT GLS

Harlequin GLS Lamps




LED filament coloured harlequin GLS shaped translucent lamp, available in a choice of vibrant colours. The coating is applied internally and is fade resistant. The lamps can be used outdoors in an IP65 rated socket. They are ideal for decorative festoons and also suitable for internal use.

- Internally coated for fade resistant vibrant colour
- 15,000 hour life
- 20,000 switching cycles
- Choice of blue, green, orange, pink, purple, red, white and yellow
- BC-B22d or ES-E27 cap
- Can be used outdoors in a suitable IP65 rated socket
- Not suitable for dimming

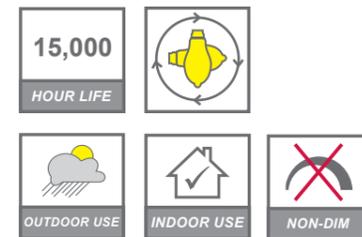

2 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Finish	Dimensions (mm)		Energy Rating	Order Qty
					Dia	H		
Single Carton								
13650	4.5	240	BC-B22d	Blue	60	102	G	1
13667	4.5	240	ES-E27	Blue	60	104	G	1
13674	4.5	240	BC-B22d	Green	60	102	E	1
13681	4.5	240	ES-E27	Green	60	104	E	1
13698	4.5	240	BC-B22d	Orange	60	102	G	1
13704	4.5	240	ES-E27	Orange	60	104	G	1
13711	4.5	240	BC-B22d	Pink	60	102	G	1
13728	4.5	240	ES-E27	Pink	60	104	G	1
13735	4.5	240	BC-B22d	Purple	60	102	G	1
13742	4.5	240	ES-E27	Purple	60	104	G	1
13759	4.5	240	BC-B22d	Red	60	102	G	1
13766	4.5	240	ES-E27	Red	60	104	G	1
13773	4.5	240	BC-B22d	White	60	102	E	1
13780	4.5	240	ES-E27	White	60	104	E	1
13797	4.5	240	BC-B22d	Yellow	60	102	E	1
13803	4.5	240	ES-E27	Yellow	60	104	E	1


LED COLOUR FILAMENT ROUND

Harlequin Round Lamps




LED filament coloured harlequin round shaped translucent lamp, available in a choice of vibrant colours. The coating is applied internally and is fade resistant. The lamps can be used outdoors in an IP65 rated socket. They are ideal for decorative festoons and also suitable for internal use.

- Internally coated for fade resistant vibrant colour
- 15,000 hour life
- 20,000 switching cycles
- Choice of blue, green, orange, pink, purple, red, white and yellow
- BC-B22d or ES-E27 cap
- Can be used outdoors in a suitable IP65 rated socket
- Not suitable for dimming

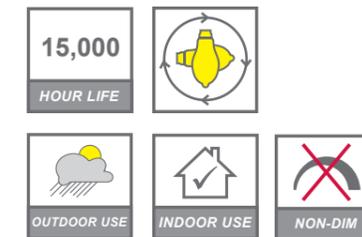

2 YEAR Manufacturers Warranty



Product Code	Watts (W)	Volts (V)	Cap	Finish	Dimensions (mm)		Energy Rating	Order Qty
					Dia	H		
Single Carton								
13810	4.5	240	BC-B22d	Blue	45	76.5	G	1
13827	4.5	240	ES-E27	Blue	45	78	G	1
13834	4.5	240	BC-B22d	Green	45	76.5	E	1
13841	4.5	240	ES-E27	Green	45	78	E	1
13858	4.5	240	BC-B22d	Orange	45	76.5	G	1
13865	4.5	240	ES-E27	Orange	45	78	G	1
13872	4.5	240	BC-B22d	Pink	45	76.5	G	1
13889	4.5	240	ES-E27	Pink	45	78	G	1
13896	4.5	240	BC-B22d	Purple	45	76.5	G	1
13902	4.5	240	ES-E27	Purple	60	78	G	1
13919	4.5	240	BC-B22d	Red	45	76.5	G	1
13926	4.5	240	ES-E27	Red	45	78	G	1
13933	4.5	240	BC-B22d	White	45	76.5	E	1
13940	4.5	240	ES-E27	White	45	78	E	1
13957	4.5	240	BC-B22d	Yellow	45	76.5	E	1
13964	4.5	240	ES-E27	Yellow	45	78	E	1

MODULAR POS



High Quality Modular POS Display



- Variety of products available
- Fast and easy install
- Strong wooden support battens
- Add multiple products
- Gaps for wiring
- Products arrive pre-wired and already attached
- 10mm extra strong foamex board
- 50mm depth for easy maintenance

For further info, please request with your agent or call the customer service team on 01274 657 088.

Designed and developed to be versatile and offer a high impact display, our modular POS product display allows you to create an impressive, eye-catching bespoke display of our products. Boards are pre-wired, simple and fast to install and ready to display.

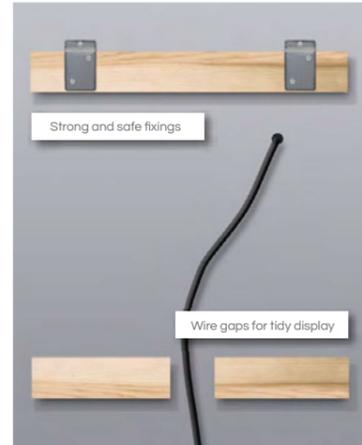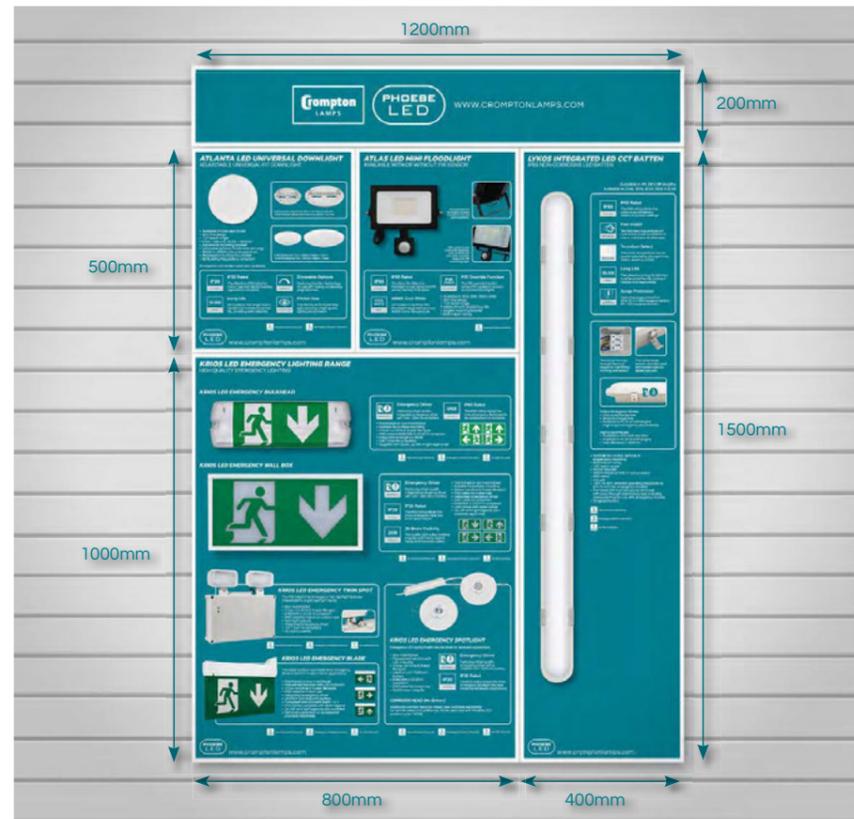

Melana



Savoca



Atlas Mini



Lykos



Oracle



Krios Emergency



Header Boards
(Available in 3 sizes)



Atlanta

Product Code	Product Description	Dimensions (mm)			Order Qty
		D	H	W	
Single Carton					
ZPOSHSMALL	Modular POS Small Header Board	50	200	800	1
ZPOSHMEDIUM	Modular POS Medium Header Board	50	200	1200	1
ZPOSHLARGE	Modular POS Large Header Board	50	200	1600	1
ZPOSATLANTABOARD	Modular POS Atlanta Board	50	500	400	1
ZPOSATLASBOARD	Modular POS Atlas Board	50	500	400	1
ZPOSKRIOSBOARD	Modular POS Krios Board	50	1000	800	1
ZPOSLYKOSBOARD	Modular POS Lykos Board	50	1500	400	1
ZPOSMELANABOARD	Modular POS Melana Board	50	1000	800	1
ZPOSORACLEBOARD	Modular POS Oracle Board	50	1500	400	1
ZPOSSAVOCABOARD	Modular POS Savoca Board	50	500	800	1

LED DOWNLIGHT POS

Display Unit for Phoebe LED Downlights



Foamex A4 Trade Counter Display, with recessed downlight with small footprint.

Supplied fitted with a choice of Phoebe LED Firesafe, Spectrum or Atlanta 6.5W downlights

For further info, please request with your agent or call the customer service team on 01274 657 088.

Product Code	Product Description	Order Qty
Single Carton		
ZPOSFIRESAFE	Foamex display stand for Firesafe Downlight	1
ZPOSSPECTRUM	Foamex display board for Spectrum Downlight	1
ZPOSATLANTA	Foamex display board for Atlanta Downlight	1

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com



4-TIER FREESTANDING DISPLAY UNIT

Heavy Duty Cardboard Display Unit

Cardboard display stand with 4 heavy duty shelves and leaflet holder.

For customers who purchase a LED Stock Profile

Supplied flat pack with assembly instructions.

For further info, please request with your agent or call the customer service team on 01274 657 088.



Product Code	Product Description	Order Qty
Single Carton		
ZPOS-STAND	Cardboard display stand for Crompton Lamps/Phoebe LED	1

Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com



Product Code Index

Code	Product Description	Cap	Page	Code	Product Description	Cap	Page	Code	Product Description	Cap	Page	Code	Product Description	Cap	Page	Code	Product Description	Cap	Page			
3415	2.5W LED G9 Capsule 2700K	G9	139	11342	5.5W LED Candle Thermal Plastic 4000K	ES	116	12363	8.5W LED Smart Candle & 3000K	BC	103	13742	4.5W LED GLS Colour Filament Purple	ES	142	14480	40W LED Galanos Arteson 600 x 600 Panel 4000K	42	LFT524DL-SF	24W LED 5ft FS Glass T8 Tube 6500K	G13	131
3422	2.5W LED G9 Capsule 4000K	G9	139	11359	5.5W LED Candle Thermal Plastic 4000K	SES	116	12370	8.5W LED Smart Candle RGB & 3000K	SES	103	13759	4.5W LED GLS Colour Filament Red	BC	142	14497	40W LED Galanos Arteson 600 x 600 Panel 6000K	42	LFT524WW	24W LED 5ft Glass T8 Tube 3000K	G13	130
4184	5W LED GLS Clear Filament Dim 2700K	BC	106	11366	5.5W LED Candle Thermal Plastic 6500K	BC	116	12417	18W LED Smart Flexi-strip RGB & 2700-6500K	105	13766	4.5W LED GLS Colour Filament Red	ES	142	14503	40W LED Galanos Arteson 1200 x 300 Panel 4000K	42	LFT524WW-SF	24W LED 5ft FS Glass T8 Tube 3000K	G13	131	
4191	5W LED GLS Clear Filament Dim 2700K	ES	106	11373	5.5W LED Candle Thermal Plastic 6500K	ES	116	12431	100W LED Keto Highbay 90° 4000K	54	13773	4.5W LED GLS Colour Filament White	BC	142	14510	Wire Suspension Kit for Galanos Arteson Panel	42	LFT628CW	28W LED 6ft Glass T8 Tube 4000K	G13	130	
4207	7.5W LED GLS Clear Filament Dim 2700K	BC	106	11380	5.5W LED Candle Thermal Plastic 6500K	SES	116	12448	150W LED Keto Highbay 90° 4000K	54	13780	4.5W LED GLS Colour Filament White	ES	142	14527	3-Hour Emergency Kit for Galanos Arteson Panel	42	LFT628CW-SF	28W LED 6ft FS Glass T8 Tube 4000K	G13	131	
4214	7.5W LED GLS Clear Filament Dim 2700K	ES	106	11496	5.5W LED Round Thermal Plastic 2700K	BC	118	12455	200W LED Keto Highbay 90° 4000K	54	13797	4.5W LED GLS Colour Filament Yellow	BC	142	14534	600 x 600 Surface Mount Galanos Arteson Panel	42	LFT628DL	28W LED 6ft Glass T8 Tube 6500K	G13	130	
4221	5W LED ST65 Antique Filament Dim 2200K BC	112	11502	5.5W LED Round Thermal Plastic 2700K	SBC	118	12462	100W LED Keto Highbay 60° 4000K	54	13803	4.5W LED GLS Colour Filament Yellow	ES	142	14541	1200 x 300 Surface Mount Galanos Arteson Panel	42	LFT628DL-SF	28W LED 6ft FS Glass T8 Tube 6500K	G13	131		
4238	5W LED ST65 Antique Filament Dim 2200K ES	112	11519	5.5W LED Round Thermal Plastic 2700K	ES	118	12479	150W LED Keto Highbay 60° 4000K	54	13810	4.5W LED Round Colour Filament Blue	BC	143	14558	5W LED Candle TP Dim 2700K	SBC	117	LGU105CWCOCB	5W LED COB GU10 4000K	GU10	125	
4245	7.5W LED ST65 Antique Fil. Dim 2200K BC	112	11526	5.5W LED Round Thermal Plastic 2700K	SES	118	12486	200W LED Keto Highbay 60° 4000K	54	13827	4.5W LED Round Colour Filament Green	ES	143	14565	Krios Blade Suspension Kit	70	LGU105CWCOCB-DIM	5W LED Dimmable COB GU10 4000K	GU10	125		
4252	7.5 LED ST65 Antique Filament Dim 2200K ES	112	11533	5.5W LED Round Thermal Plastic 4000K	BC	118	12493	20W SM LED Warm White Flexi-Strip Kit	66	13834	4.5W LED Round Colour Filament Green	BC	143	14572	Krios Blade Recessed Kit	70	LGU105WWCOCB	5W LED COB GU10 3000K	GU10	125		
4269	5W LED G80 Antique Filament Dim 2200K BC	112	11540	5.5W LED Round Thermal Plastic 4000K	ES	118	12509	20W SM LED Cool White Flexi-Strip Kit	66	13841	4.5W LED Round Colour Filament Green	ES	143	14589	12W LED Savoca Ceiling Light Tri-colour	50	LGU105WWCOCB-DIM	5W LED Dimmable COB GU10 3000K	GU10	125		
4276	5W LED G80 Antique Filament Dim 2200K ES	112	11557	5.5W LED Round Thermal Plastic 4000K	SES	118	12516	32W SM LED RGB Flexi-Strip Kit	66	13858	4.5W LED Round Colour Filament Orange	BC	143	14596	12W LED Savoca Ceiling Light MW Tri-colour	50	LGU10DLWCOCB	5W LED COB GU10 6000K	GU10	125		
4283	5W LED G95 Antique Filament Dim 2200K BC	112	11564	5.5W LED Round Thermal Plastic 6500K	BC	118	12523	WW/CW Flexi-strip Driver Kit	66	13865	4.5W LED Round Colour Filament Orange	ES	143	14602	12W LED Savoca Ceiling Light EM Tri-colour	50	LGU10DLWCOCB-DIM	5W LED Dimmable COB GU10 6000K	GU10	125		
4290	5W LED G95 Antique Filament Dim 2200K ES	112	11571	5.5W LED Round Thermal Plastic 6500K	ES	118	12530	RGB Flexi-strip Driver Kit	66	13872	4.5W LED Round Colour Filament Pink	BC	143	14619	12W LED Savoca Ceiling Light MW/EM Tri-colour	50	RBF230/4/M3	Atlanta Downlight Emergency Conversion Pack	26			
4306	7.5W LED G125 Antique Fil. Dim 2200K BC	112	11588	5.5W LED Round Thermal Plastic 6500K	SES	118	12547	Accessory Kit for LED Flexi-Strip	66	13889	4.5W LED Round Colour Filament Pink	ES	143	14626	18W LED Savoca Ceiling Light Tri-colour	50	ZPOSHBSMALL	Modular POS Small Header Board	144			
4313	7.5W LED G125 Antique Fil. Dim 2200K ES	112	11694	5.5W LED GLS Thermal Plastic 2700K	BC	114	12554	10W LED Atlas Mini Floodlight 4000K	62	13896	4.5W LED Round Colour Filament Purple	BC	143	14633	18W LED Savoca Ceiling Light MW Tri-colour	50	ZPOSHBMEDIUM	Modular POS Medium Header Board	144			
4870	4.5W LED Glass SMD GU10 2700K	GU10	124	11700	5.5W LED GLS Thermal Plastic 2700K	ES	114	12561	20W LED Atlas Mini Floodlight 4000K	62	13902	4.5W LED Round Colour Filament Purple	ES	143	14640	18W LED Savoca Ceiling Light EM Tri-colour	50	ZPOSHBLARGE	Modular POS Large Header Board	144		
4887	4.5W LED Glass SMD GU10 4000K	GU10	124	11717	8.5W LED GLS Thermal Plastic 2700K	BC	114	12578	30W LED Atlas Mini Floodlight 4000K	62	13919	4.5W LED Round Colour Filament Red	BC	143	14657	18W LED Savoca Ceiling Light MW/EM Tri-colour	50	ZPOSATLANTABOARD	Modular POS Atlanta Board	144		
5570	8W LED Glass T5 Tube 4000K	G5	132	11724	8.5W LED GLS Thermal Plastic 2700K	ES	114	12585	40W LED Atlas Mini Floodlight 4000K	62	13926	4.5W LED Round Colour Filament Red	ES	143	14862	5W LED Glass SMD 12V MR16 4000K	GU5.3	ZPOSATLASBOARD	Modular POS Atlas Board	144		
5587	12W LED Glass T5 Tube 4000K	G5	132	11731	8.5W LED GLS Thermal Plastic 4000K	BC	114	12592	10W LED Atlas Mini Floodlight PIR 4000K	62	13933	4.5W LED Round Colour Filament White	BC	143	14664	Smart Relay Switch	94	ZPOSKRIOSBOARD	Modular POS Krios Board	144		
5624	3.5W LED DET 2700K SCC-S15	135	11748	8.5W LED GLS Thermal Plastic 4000K	ES	114	12608	20W LED Atlas Mini Floodlight PIR 4000K	62	13940	4.5W LED Round Colour Filament White	ES	143	14671	Intelligent Dimmer Switch	90	ZPOSLYKOSBOARD	Modular POS Lykos Board	144			
5631	6W LED DET 2700K SCC-S15	135	11755	11W LED GLS Thermal Plastic 2700K	BC	114	12615	30W LED Atlas Mini Floodlight PIR 4000K	62	13957	4.5W LED Round Colour Filament Yellow	BC	143	14688	White Eyelid Cover for Melana Bulkhead	46	ZPOMELANABOARD	Modular POS Melana Board	144			
5938	5W LED GLS Pearl Filament Dim 2700K BC	109	11762	11W LED GLS Thermal Plastic 2700K	ES	114	12622	40W LED Atlas Mini Floodlight PIR 4000K	62	13964	4.5W LED Round Colour Filament Yellow	ES	143	14695	White Grill Cover for Melana Bulkhead	46	ZPOSORACLEBOARD	Modular POS Oracle Board	144			
5945	5W LED GLS Pearl Filament Dim 2700K ES	109	11779	11W LED GLS Thermal Plastic 4000K	BC	114	12639	8.5W LED Fiesafe Downlight 3000/4000/6500K	14	13971	4W LED Krios Emergency Bulkhead	78	14732	Phoebe LED Keto MW Remote Control	54	ZPOSSAVOCABOARD	Modular POS Savoca Board	144				
5952	7.5W LED GLS Pearl Filament Dim 2700K BC	109	11786	11W LED GLS Thermal Plastic 4000K	ES	114	12691	5W LED GX53 4000K	GX53	13995	2.3W LED Krios Emergency Twin Spotlight	86	14756	2W LED G4 Capsule 2700K	G4	139	ZPOSFIRESAFE	Foamex Display Board for Firesafe Downlight	146			
5969	7.5W LED GLS Pearl Filament Dim 2700K ES	109	11793	11W LED GLS Thermal Plastic 6500K	BC	114	12707	3W LED R39 TP Reflector 2700K	SES	14008	1W LED Krios Emergency Spotlight	82	14763	2W LED G4 Capsule 4000K	G4	139	ZPOSSPECTRUM	Foamex Display Board for Spectrum Downlight	146			
6102	5W LED Dim Glass SMD GU10 2700K	GU10	124	11809	11W LED GLS Thermal Plastic 6500K	ES	114	12714	6W LED R50 TP Reflector 2700K	SES	14015	1W LED Krios Emergency Spotlight Corridor Lens	82	14831	4W LED SMD 12V MR11 2700K	GU4	129	ZPOSATLANTA	Foamex Display Board for Atlanta Downlight	146		
6119	5W LED Dim Glass SMD GU10 4000K	GU10	124	11816	11W LED GLS Thermal Plastic Dim 2700K	BC	115	12721	8W LED R63 TP Reflector 2700K	ES	14022	2W LED Krios Emergency Blade	70	14848	4W LED SMD 12V MR11 4000K	GU4	129	ZPOS-STAND	4-Tier Display Crompton Lamps/Phoebe LED	147		
6607	6W LED ST64 Antique Spiral Fil. Dim 2200K ES	113	11823	11W LED GLS Thermal Plastic Dim 2700K	ES	115	12738	9.5W LED R80 TP reflector 2700K	ES	14039	Krios Blade Legend Set - Arrow Up	70	14855	5W LED Glass SMD 12V MR16 2700K	GU5.3	128	ZPOSMART	Smart Range Display Stand	148			
6614	6W LED G80 Antique Spiral Fil. Dim 2200K BC	113	11830	11W LED GLS Thermal Plastic Dim 4000K	BC	115	12769	6.5W LED Candle Clear Filament 2700K	BC	14046	Krios Blade Legend Set - Left/Right	70	14879	9.5W LED Dimmable PAR30 3000K	ES	141	ZPOSLIGHTBAR2019	LED Lamp Display Stand	148			
6621	6W LED G80 Antique Spiral Fil. Dim 2200K ES	113	11847	11W LED GLS Thermal Plastic Dim 4000K	ES	115	12776	6.5W LED Candle Clear Filament 2700K	ES	14060	6.5W LED Candle Clear Filament 2700K	ES	107	14886	15.5W LED Dimmable PAR38 3000K	ES	141	ZTRAVELMUG	450ml Travel Mug	149		
7130	5W LED Candle Clear Filament Dim 2700K BC	107	11854	11W LED GLS Thermal Plastic Dim 6500K	BC	115	12783	6.5W LED Candle Clear Filament 2700K	SES	14077	Krios Wall Box Legend Set - Arrow Up	74	14893	4.9W LED SMD Dimmable L1/GU10 2700K	GU10	127	ZCARPENCIL	Carpenters Pencil	149			
7147	5W LED Candle Clear Filament Dim 2700K SES	107	11861	11W LED GLS Thermal Plastic Dim 6500K	ES	115	12790	6.5W LED Round Clear Filament 2700K	BC	14084	Krios Wall Box Legend Set - Arrow Left	74	14909	4.9W LED SMD Dimmable L1/GU10 4000K	GU10	127	ZWINSTICK	A6 Window Sticker	149			
7154	5W LED Candle Clear Filament Dim 2700K ES	107	11878	15W LED GLS Thermal Plastic 2700K	BC	114	12806	6.5W LED Round Clear Filament 2700K	ES	14091	Krios Wall Box Legend Set - Arrow Right	74	14985	8W LED Orphica Commercial Downlight 4000K	10		ZDIPEN	Ball Point Pen	149			
7161	5W LED Candle Clear Filament Dim 2700K SES	107	11885	15W LED GLS Thermal Plastic 2700K	ES	114	12813	6.5W LED Round Clear Filament 2700K	SES	14107	Phoebe LED Keto Microwave Sensor Module	54	14992	14W LED Orphica Commercial Downlight 4000K	10		ZBAGS2014	Exhibition Bag	149			
7178	5W LED Candle Pearl Filament Dim 2700K BC	110	11892	14W LED GLS Thermal Plastic Dim 2700K	BC	115	12820	2.7W LED Pygmy/Fridge/Sign 2700K	SES	14121	38W LED Galanos Arteson 600 x 600 Panel 3000K	42	15005	24W LED Orphica Commercial Downlight 4000K	10		ZBOTTLEOPENER	Bottle Opener Keyring	149			
7185	5W LED Candle Pearl Filament Dim 2700K SBC	110	11908	14W LED GLS Thermal Plastic Dim 2700K	ES	115	12837	4.7W LED Filament Cooker Hood 2700K	SES	14138	38W LED Galanos Arteson 600 x 600 Panel 4000K	42	15012	34W LED Orphica Commercial Downlight 4000K	10							
7192	5W LED Candle Pearl Filament Dim 2700K ES	110	11915	9W LED 110V GLS Special Purpose 2700K	BC	121	12844	4.7W LED Filament Cooker Hood 4000K	SES	14144	7W LED Crown Silver Filament 2700K	ES-E27	111	15029	100W LED Keto Highbay Emergency 90° 4000K	54						
7208	5W LED Candle Pearl Filament Dim 2700K SES	110	11922	9W LED 110V GLS Special Purpose 2700K	ES	121	12851	8.5W LED Fiesafe Downlight 3000/4000/6500K	18	14145	11/15W LED Melana Bulkhead Tri-colour	46	15036	150W LED Keto Highbay Emergency 90° 4000K	54							
7215	5W LED Round Clear Filament Dim 2700K BC	107	12042	9W LED 110V GLS Special Purpose 4000K	BC	121	12684	5W LED GX53 2700K	GX53	14152	11/15W LED Melana Bulkhead MW Tri-colour	46	15043	200W LED Keto Highbay Emergency 90° 4000K	54							
7222	5W LED Round Clear Filament Dim 2700K SBC	107	12059	25W LED Direct to Mains PLL 4000K	2G11	134	13452	4.9W LED SMD L1/GU10 2700K	GU10	14169	11/15W LED Melana Bulkhead EM Tri-colour	46	15050	100W LED Keto Highbay Emergency 60° 4000K	54							
7239	5W LED Round Clear Filament Dim 2700K ES	107	12066	16W LED Glass Mains T5 Tube 4000K	G5	133	13469	4.9W LED SMD L1/GU10 4000K	GU10	14176	11/15W LED Melana Bulkhead MW EM Tri-colour	46	15067	150W LED Keto Highbay Emergency 60° 4000K	54							
7246	5W LED Round Clear Filament Dim 2700K SES	108	12073	20W LED Glass Mains T5 Tube 4000K	G5	133	13476	5W LED Candle TP Dim 2700K	BC	14183	100W LED Atlas Com. Photocell Floodlight 4000K	58	15074	200W LED Keto Highbay Emergency 60° 4000K	54							
7253	5W LED Round Pearl Filament Dim 2700K BC	110	12080	8W LED Glass Mains T5 Tube 4000K	G5	133	13483	5W LED Candle TP Dim 2700K	ES	14190	150W LED Atlas Com. Photocell Floodlight 4000K	58	15382	5W LED Round Thermal Plastic 2700K	SES	119						
7260	5W LED Round Pearl Filament Dim 2700K SBC	110	12097	12W LED Glass Mains T5 Tube 4000K	G5	133	13490	5W LED Candle TP Dim 2700K	SES	14206	5W LED Candle TP Dim 2700K	ES	117	14206	5W LED Smart RGB & 3000K GU10	GU10	104					
7277	5W LED Round Pearl Filament Dim 2700K ES	110	12103	100W LED Atlas Commercial Floodlight 4000K	58		13506	5W LED Candle TP Dim 4000K	BC	14251	20W LED 4ft Lykos Batten Tri-colour	38	12646-10	Firesafe Chrome Bezel 10 Pack	14							
7284	5W LED Round Pearl Filament Dim 2700K SES	110	12110	150W LED Atlas Commercial Floodlight 4000K	58		13513	5W LED Candle TP Dim 4000K	ES	14268	20W LED 4ft Lykos Batten EM Tri-colour	38	9417b	10W LED Spectrum CCT/RGB Downlight	22							
8854	3.5W LED DET 4000K SCC-S15	135	12127	200W LED Atlas Commercial Floodlight 4000K	58		13520	5W LED Candle TP Dim 4000K	SES	14275	30W LED 5ft Lykos Batten Tri-colour	38	LFT29CW	9W LED 2ft Glass T8 Tube 4000K	G13	130						
8861	6W LED DET 4000K SCC-S15	135	12134	5W LED Bent-Hip Candle Fil. Dim 2700K	BC	108	13537	5W LED Candle TP Dim 6500K	BC	14282	30W LED 5ft Lykos Batten EM Tri-colour	38	LFT29CW-SF	9W LED 2ft FS Glass T8 Tube 4000K	G13	131						
9127	12.5W LED Mains AR111 3000K	G53	136	5W LED Bent-Hip Candle Fil. Dim 2700K	SBC	108	13544	5W LED Candle TP Dim 6500K	ES	14299	40W LED 4ft Lykos Batten HO Tri-colour	38	LFT29DL	9W LED 2ft Glass T8 Tube 6500K	G13	130						
9738	5W LED Sunset Dim GU10 3000K-2200K	GU10	126	5W LED Bent-Hip Candle Fil. Dim 2700K	ES	108	13551	5W LED Candle TP Dim 6500K	SES	14305	40W LED 4ft Lykos Batten EM HO Tri-colour	38	LFT29DL-SF	9W LED 2ft FS Glass T8 Tube 6500K	G13	131						
9752	8W LED Glass T5 Tube 3000K	G5	132	5W LED Bent-Hip Candle Fil. Dim 2700K	SES	108	13568	5W LED Round Thermal Plastic 2700K	BC													

Crompton Lamps/Phoebe LED Limited Warranty

For individual warranty details, refer to the original product packaging, or visit our website, www.cromptonlamps.com

Terms & Conditions:

A lamp/luminaire is considered defective or faulty if either of the following occurs:

- It fails before the end of the Rated Life in hours stated on the product box.
- The lumens fall below 70% of the Lumens stated on the product box. This warranty only covers products applied within 'intended' or 'normal use' as defined by:
- The operating conditions are in accordance with the information supplied on the packaging, the product or the Crompton Lamps/Phoebe LED website.
- The burning period must not exceed 4,000 hours per year.
- The ambient temperature never exceeds the operating temperature range of -20°C to 30°C unless otherwise stated on the packaging.
- The relative humidity (RH) in the installation doesn't exceed 80% RH, or exceed the IP rating of the lamp/luminaire if relevant.
- The lamp is operated in an open luminaire with a minimum of 10mm spacing around the body of the lamp with the exception of the cap.
- The lamp/luminaire is not subjected to more than the stated switching cycles on the packaging. Switching cycle is defined as the sequence of switching the lamp on and off at set intervals of 30 seconds.
- The electrical installation in which the lamp operates is not subjected to voltage fluctuations in a range exceeding 230V +/- 10%.

This warranty is supplementary to our published standard Terms & Conditions of Sale and is based on ERP performance criteria and lifetime calculations/verification from the user. The warranty is only available within the UK and Ireland. This warranty does not affect the statutory rights of the purchaser.

The warranty period starts from the date the products were purchased/invoiced prior to final installation. The faulty or defective product must be returned to Crompton Lamps along with the receipt and postage paid by the sender. The warranty covers a one for one replacement product if it fails within the warranty period. The company reserve the right to repair or offer a replacement to a similar or better performance at the company's discretion.

The company is not liable for any consequential loss or rectification costs in relation to this warranty, and does not include any removal or re-installation activities, labour costs or expenses. Crompton Lamps reserves the right to carry out an audit of the lighting installation and test the concerned lamps to determine the cause of failure & applicability of the Warranty. At the company's request, access shall be given to the installation in order to carry out the necessary quality inspections to determine the failure cause.

Crompton Lamps reserves the right to make the final decision on the validity of all warranty claims.

Exclusions:

This Warranty does not cover any of the following:

- Damage due to misuse or negligence.
- Failures caused by acts of God / Acts of Terrorism.
- Installations in violation of any applicable standard, code or instruction or incorrect voltage.

Conditions of Sale:

All goods supplied are subject to the company's general conditions of sale which are available on request.

Trade Descriptions:

All descriptions represent only particulars of the goods to which they apply and do not form part of any contract. Due to a policy of continuous development and improvement, Crompton Lamps Limited reserves the right to change the specification and performance data of the products listed without prior notice or public announcement.



Carriage Paid Price

£195

Minimum order value of £195 for carriage paid delivery to UK mainland destinations.

Orders under £195 will be subject to a £10.00 small order charge.

Please contact our customer service team for minimum order values and delivery prices to non-UK mainland destinations.

Same Day Despatch

Order **Monday - Friday** before **4pm** for **Same Day** despatch*.

*We endeavour to despatch all orders received Monday - Friday before 4pm the same day.

Next Day Delivery

All UK mainland orders will be despatched by our **Next Day** delivery service*.

*95% of orders are delivered the next working day. For customers requiring guaranteed next working day delivery, an extra charge will be applied. Please contact our customer service team for guaranteed next day delivery options and prices.

The above information does not include weekend delivery. Please contact our customer service team if you require a quotation for Saturday delivery.

Visit our website and view our full range of lamps and fittings

Benefits of signing up:

- Online ordering
- Check stock and prices
- View order history
- Detailed product information
- View our comprehensive range



Tel: 01274 657 088
 Email: sales@cromptonlamps.com
 Web: www.cromptonlamps.com





Contact Us
Crompton Lamps Limited
Unit 2
Marrtree Business Park
Bowling Back Lane
Bradford
BD4 8QE


Using Sat Nav?
BD4 8TP

General Enquiries:
Tel: 01274 657 088
Fax: 01274 657 087
Email: lamps@cromptonlamps.com
Web: www.cromptonlamps.com

UK Sales
Tel: 01274 657 088
Fax: 01274 657 087
Email: sales@cromptonlamps.com

Customer Services
Email: sales@cromptonlamps.com

Social Media



Design and Production by
Marketing, Crompton Lamps Limited

E. & O. E. © Crompton Lamps Limited 2022.


All rights reserved

Printed in the UK

Crompton Lamps Limited registered in England and Wales No. 05590551



Crompton Lamps/Phoebe LED **V2** *Lighting Solutions*

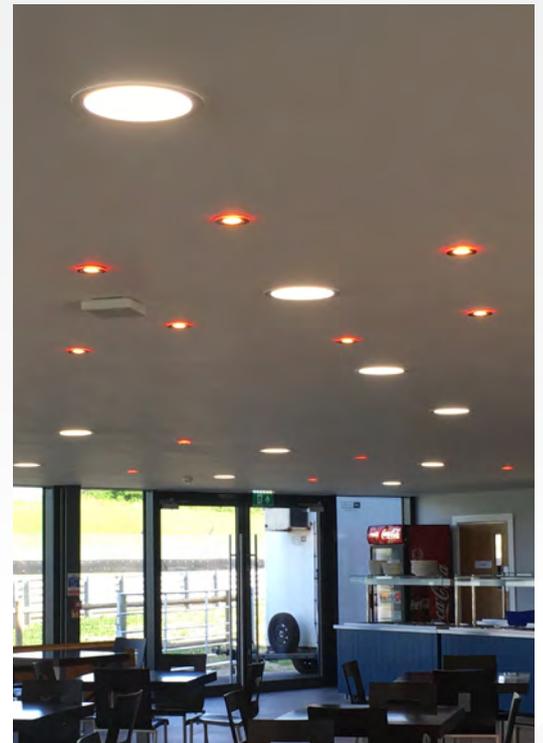

Crompton Lamps Limited registered in England and Wales No: 05590551

Crompton Lamps Limited
Unit 2
Marrtree Business Park
Bowling Back Lane
Bradford
BD4 8QE

Tel: 01274 657 088 Fax: 01274 657 087
Email: sales@cromptonlamps.com



www.cromptonlamps.com

Design and production by Marketing, Crompton Lamps Limited, E. & O. E. © Crompton Lamps Limited 2022. All rights reserved.

